

Kollmorgen Automation Suite

Getting Started



Document Edition: V, December 2023

Valid for KAS Software Revision 4.01

Part Number: 959713



For safe and proper use, follow these instructions. Keep for future use.

1 Table of Contents

1	Table of Contents	2
2	Introduction	4
2.1	Related Documents	4
2.2	Alerts and Warnings	4
3	System Overview	5
3.1	Software Packages	5
3.2	Hardware Components	6
4	Install KAS-IDE	7
4.1	System Requirements	7
4.2	Download	7
4.3	Installation Procedure	8
4.3.1	User Data	8
4.4	Additional Literature	9
5	Installing KAS Runtime	10
5.1	Update the Runtime on AKD PDMM and PCMM	10
5.1.1	AKD PDMM and PCMM File Type: .IMG	10
5.1.1.1	AKD PDMM	10
5.1.1.2	PCMM	10
5.1.1.3	Model Code	10
5.1.2	PCMM2G File Type: .ZIP	11
5.1.2.1	Model Code	11
6	Install Hardware (HW)	14
6.1	HMI - Graphic Operator Interface	16
6.2	Install Controllers	16
6.3	EtherCAT Motion Bus	16
6.4	Remote Input/Output - I/O Terminal	17
6.5	Install AKD Drives	19
6.6	Install AKM or AKM2G Motors	19
6.7	Working with SafePLC2 Projects	20
7	Updating Firmware	21
7.1	Check AKD / AKD2G Drive Firmware with KAS-IDE	21
7.2	Download AKD PDMM Drive Firmware	21
7.2.1	Update the AKD PDMM Drive Firmware with KAS-IDE	22
7.3	AKD/AKD2G Firmware Update	22
8	Installing Kollmorgen Visualization Builder	24
8.1	Download	24
8.2	Installation Procedure	24
9	Finalize Installation	26
9.1	Test the Installation	26
10	Troubleshooting	27
11	Copyrights, Licenses, and Trademarks	28
11.1	Copyrights	28
11.2	Trademarks	28
11.3	PCMM2G	29
11.4	Disclaimer	29

12 Support and Services	30
--------------------------------------	-----------

2 Introduction

This guide covers these main procedures to have your KAS system up and running:

- **Hardware (HW) Installation** (Connection and Wiring): Wiring and hardware details, connectors, system diagrams.
- **HW Configuration**: Basic configuration and settings needed to start the HW components (e.g., HMI, Industrial PC, Fieldbus, I/O).
- **Software (SW) Installation**: KAS software setup.

2.1 Related Documents

See the [Kollmorgen Downloads](#) page for documentation about controllers, drives, motors, and other components.

2.2 Alerts and Warnings

When alert symbols are seen in a manual, be aware of the potential for personal injury.

Follow the recommended precautions and safe operating practices included with the alert symbols.

- Safety notices in the manuals provide important information.
- Read and be familiar with these instructions before attempting to install, operate, or perform maintenance.
- The purpose of this section is to alert users to possible safety hazards associated with equipments and the precautions that need to be taken to reduce the risk of personal injury and damage to the equipment.
- Failure to observe these precautions could result in serious bodily injury, damage to the equipment, or operational difficulty.


3 System Overview

Kollmorgen Automation Suite (KAS) is a complete system solution.

This includes a variety of software packages designed for complete control over your hardware.

3.1 Software Packages


Software	Description
KAS-IDE	The KAS Integrated Development Environment (KAS-IDE) provides all necessary tools for designing, programming, configuring, debugging, and maintaining machine applications.
KAS Runtime	The KAS Runtime engine includes a soft PLC and a motion controller.
KVB (optional)	The Kollmorgen Visualization Builder (KVB) assists in designing an HMI panel.

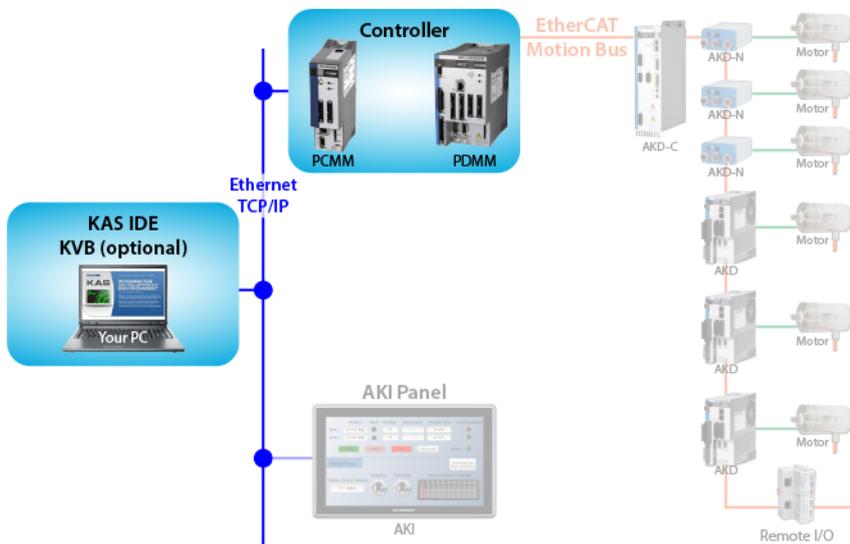

3.2 Hardware Components

The KAS system is comprised of these hardware components.

Component	Models	Description
Controller	PCMM	<ul style="list-style-type: none"> Standalone programmable controller. Provides a real-time platform with a PLC engine and motion engine to execute your application program and communicate with all network devices (e.g., remote I/O, drives, HMI, other PLCs, etc.)
Controller + Drive	AKD PDMM	<ul style="list-style-type: none"> Integrated programmable controller and servo drive. Provides a real-time platform with a PLC engine and motion engine to execute your application program and communicate with all network devices (e.g., remote I/O, drives, HMI, other PLCs, etc.)
Remote I/O	AKT, AKT2G	Digital and analog input and output signals . These signals provide sensor feedback and actuation between an automation system and the physical world.
HMI	AKI, AKI2G	Provides a graphical interface for the operator to manage the machine's operations.
Drive	AKD, AKD2G, AKD-C/N	Servo drives specifically designed with versatility, communications, and the power to expand machine performance.
Motor	AKM, AKM2G	Servo motor is an actuator that allows for precise control of position, velocity, and acceleration by closing the control loop with a feedback device.

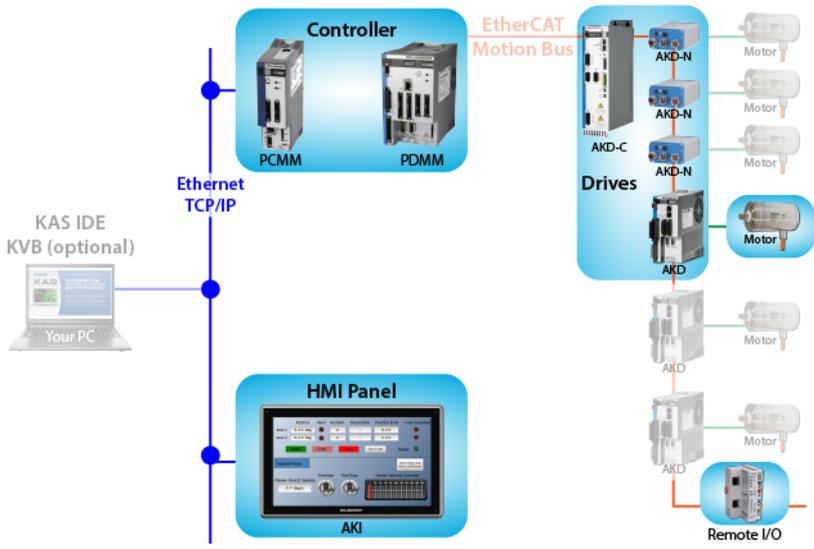

4 Install KAS-IDE

4.1 System Requirements

These are the minimum system requirements for the KAS-IDE:

Element	Description
Connectivity	<ul style="list-style-type: none"> 1 Ethernet port, at either 100MB or 1GB. See Note #2.
Display	<ul style="list-style-type: none"> WXGA+ (1440 x 900) or higher-resolution monitor with 24-bit, 16.7M colors. See Note #1.
Memory	1GB RAM (for 32-bit) or 2GB RAM (for 64-bit) or greater (recommended for complex applications).
Operating System	<ul style="list-style-type: none"> Microsoft® Windows® 10 (32-bit or 64-bit). Microsoft® Windows® 11 (64-bit). For optimal performance, verify the operating system is fully updated with the latest patches.
Processor Type	Intel® Pentium® M or equivalent processor at 1.5GHz or greater.
Storage	16GB (for 32-bit) or 20GB (for 64-bit) of free space on hard disk.
Web Browser	<ul style="list-style-type: none"> A modern web browser is required to access the web server and online help. We recommend Microsoft Edge.

NOTE

- Better results are achieved with OpenGL and 3D cards.
- A 100MB network is required in order to allow the KAS-IDE to Runtime communication to work in all conditions.
The AKD WorkBench AutoTuner and Scope both require 100MB of bandwidth to function properly.

TIP

See [Connect Remotely](#) for information about the ports used by the KAS-IDE. The ports may need to be opened to support connecting from an external network.

4.2 Download

The latest version of the Kollmorgen Automation Suite is available from KDN.

See www.kollmorgen.com/en-us/developer-network/ to download the latest or older versions.

NOTE

This is a restricted community to which you must be given access based on having purchased KAS. If you do not have access, contact support.

4.3 Installation Procedure

ⓘ IMPORTANT

Installation of the KAS-IDE can require you to change your firewall setting. If you do not have sufficient privileges to configure your firewall, you must stop the relevant Windows Service.

Once KAS has finished downloading, complete these installation steps:

1. Double-click the **KAS-Setup.exe** file to run the installation Wizard.

NOTE

A Security Warning dialog displays as a result of security certification. Do not be alarmed.

2. Click **Run** to start the installation Wizard.
3. While the setup is loading, wait for the setup splash screen to vanish after being displayed. The Welcome Wizard displays with the version and build number of the KAS-IDE.
4. Click **Next** to continue.
5. Review the License Agreement and click **I Agree** to continue the installation.

NOTE

You must accept the agreement to install KAS.

6. Select the **Development Environment** installation type from the drop-down menu.

Installation Type	Description
Development Environment	This installation is typically used for creating and developing a new application. When you need to install the KAS-IDE and the KAS Runtime Simulator, select Development Environment as the type of installation.
Custom	You can manually select the specific KAS components to install.

7. Click **Next** to access the destination folder.
8. Accept the recommended default location or click **Browse** to specify a custom install directory.
9. When finished, click **Install** to continue.

👉 TIP

Kollmorgen strongly recommends accepting the default destination folder under C:\Program Files\Kollmorgen\Kollmorgen Automation Suite\Kollmorgen Automation Suite 4.01.X.X.

10. The software installation begins. Wait until the installation process is complete.
11. Click **Finish**.

👉 TIP

- Adding the **KAS-IDE** application as an exception in your firewall settings is recommended to avoid security issues.

4.3.1 User Data

User-generated data such as log files, project sources, field bus configurations, function blocks, etc. are stored in the Windows User directory and are maintained between installations. This applies to files on AKD PDMs, PCMMs, and Simulator files.

4.4 Additional Literature

Document Title	Description	Download
Release Notes	<p>The KAS Release Notes contain a summary of:</p> <ul style="list-style-type: none"> • New features, fixed and known limitations, workarounds • Information on all hardware and software components that have been updated, changed, or added in the release. 	
Getting Started	<p>Contains these main steps to get the KAS system up and running.</p> <ul style="list-style-type: none"> • Hardware (HW) Installation (Connection and Wiring): Wiring and hardware details, connectors, system diagrams. • HW Configuration: Basic configuration and settings needed to start the HW components (e.g., HMI, Industrial PC, Fieldbus, I/O). • Software (SW) Installation: KAS software setup. 	
30 Minutes to Motion	<p>Contains the main topics to get started quickly with KAS-IDE. The objective is to familiarize you with the basic principles and the way the program works by creating a simple motion application project.</p> <p>What does it contain?</p> <ul style="list-style-type: none"> • Key Features • Explore the Workspace • Build a Motion Project <p>Almost every task performed in KAS falls under one of these basic steps (which may not always be completed in this order):</p> <ol style="list-style-type: none"> 1. Start Projects - Create a project from scratch or modify an existing project. 2. Add Components - Add necessary elements to build the project and control the motion part of the system. 3. Build Output - Select a device and generate the application to deliver to users. 4. Run Output - Make the output accessible to end-users. 	
IDE User Manual	Contains content to help with KAS-IDE except the topics included in the Reference Manuals.	
Reference Manual - PLC Library	Contains Technical References on PLC Programming Languages and Library.	
Reference Manual - Motion Library	Contains Technical References on Motion Library for Pipe Network and PLCopen.	

5 Installing KAS Runtime

The controller has all the necessary software installed (including KAS Runtime).

NOTE

KAS Runtime is only supported with Kollmorgen controllers.

5.1 Update the Runtime on AKD PDMM and PCMM

The KAS Runtime is contained in the AKD PDMM and PCMM firmware and comes pre-installed.

This procedure is for updating the firmware and runtime using the KAS web server.

ⓘ IMPORTANT

The firmware files for "AKD PDMM and PCMM File Type: .IMG" (→ p. 10) are different than those for "PCMM2G File Type: .ZIP" (→ p. 11).

5.1.1 AKD PDMM and PCMM File Type: .IMG

- **.IMG File Formats**
 - "AKD PDMM" (→ p. 10)
 - "PCMM" (→ p. 10)
- "Model Code" (→ p. 10)

5.1.1.1 AKD PDMM

Controller	File Name Format	Example File Name
AKD PDMM	KAS-PDMM-M- {Model-Code} - {Software-Version} .img	KAS-PDMM-M- K1EC - 4.01.0.91992 .img

5.1.1.2 PCMM

Controller	File Name Format	Example File Name
PCMM	KAS-PCMM-M- {Model-Code} - {Software-Version} .img	KAS-PCMM-M- M2EC - 4.01.0.91992 .img

5.1.1.3 Model Code

Model Code	CPU Speed	Core
KCEC and MCEC	800MHz	Single
K1EC and M1EC	1.2GHz	Single
M2EC	1.2GHz	Dual

5.1.2 PCMM2G File Type: .ZIP

- **.ZIP File Formats**
 - "Operating System (OS) + KAS Runtime (RT)" (→ p. 11)
 - "OS Only" (→ p. 11)
 - "KAS Runtime (RT) Only" (→ p. 11)
- "Model Code" (→ p. 11)

5.1.2.0.1 Operating System (OS) + KAS Runtime (RT)

- These files contain both the operating system and the KAS runtime.

Firmware File	File Name Format	Example File Name
Operating System (OS) + KAS Runtime (RT)	KAS-PCMM2G- {Processor/RAM Code} - {Storage Code} - {OS-Version} - {RT-Version} .zip	KAS-PCMM2G- Cx-08 -OS- 1.0.0.00288 -RT- 4.01.0.91998 .zip

5.1.2.0.2 OS Only

- Operating system security update.
- These are provided as security patches.
- The KAS Runtime is not affected, but must not be less than a specific version.

Firmware File	File Name Format	Example File Name
OS Only	KAS-PCMM2G- {Processor/RAM Code} - {Storage Code} - {OS-Version} .zip	KAS-PCMM2G- Cx-08 -OS- 1.0.0.00281 .zip

5.1.2.0.3 KAS Runtime (RT) Only

- Unofficial runtime patch file.
 - These files are very small.
 - They may be sent to individual users when troubleshooting specific issues.

Firmware File	File Name Format	Example File Name
KAS Runtime (RT) Only	KAS-PCMM2G- {Processor/RAM Code} - {Storage Code} - {RT-Version} .zip	KAS-PCMM2G- Cx-08 -RT- 4.01.0.91978 .zip

5.1.2.1 Model Code

Processor / RAM / Storage Code	CPU Speed	Core	RAM	Storage
Cx-08	1.5GHz	Quad	2 / 4 / 8GB	8GB
Cx-16	1.5GHz	Quad	2 / 4 / 8GB	16GB
Cx-32	1.5GHz	Quad	2 / 4 / 8GB	32GB

Procedure

1. Download the latest drive firmware and/or runtime firmware from [Kollmorgen.com](https://www.kollmorgen.com).
2. Open the controller's web server in your web browser by entering its IP address.
3. Select the **Settings** tabbed-page.
4. In the **Firmware** pane, click the **Choose File** button to select the new firmware image file for the KAS Runtime.

The recommended file is shown in the **Firmware Information** section.

Examples:

AKD PDMM and PCMM

Firmware Information

Firmware version 4.01.0.91992

Recommended file name `KAS-PDMM-M-M1EC-{version}.img`

PCMM2G

Firmware Information

OS version 1.0.0.00281

Runtime version 4.01.0.91992

Recommended file name `KAS-PCMM2G-Cx-08-OS-{OS version}-RT-{Runtime version}.zip`

5. Click **Upgrade** to start the procedure.

TIP

If the **Upgrade** button is disabled, log into the webserver.

Click **Login** at the top of the web page and enter the password.

A message and a throbber are shown across the web page, indicating that maintenance is in progress.

The 7-segment display on the controller animates with chasing lights.

Successful Upgrade	<ul style="list-style-type: none"> • The controller automatically reboots with new firmware. • Press <CTRL+F5> in the web browser to force a page refresh so the Firmware Version updates to the new version number.
Incompatible Firmware	<p>Example: AKD PDMM and PCMM Error Message</p> <p>An error message, similar to this, appears if the wrong firmware file was downloaded:</p> <div style="border: 1px solid gray; padding: 5px; margin: 5px 0;"> <pre>The file provided is not compatible with this device. The file name should be... "KAS-PDMM-M-MCEC-{version}.img"</pre> </div> <p>Example: PCMM2G Runtime Error Message</p> <div style="border: 1px solid gray; padding: 5px; margin: 5px 0;"> <pre>Minimum runtime version requirement not met.</pre> </div>

6. After the download is complete, click **Reboot**.

A message and a throbber are shown over the web server while the reboot is in progress.

The login session is no longer valid when the reboot is complete.

The webserver displays a message to indicate the user has been logged out.

NOTE

This step is not necessary if the controller automatically reboots during the upgrade (previous step).

7. Press <CTRL+F5> to force the web browser to refresh the page.

ⓘ IMPORTANT

Do **not** try to refresh the web page until firmware upgrade is completed.

6 Install Hardware (HW)

Before a motion application can be up and running, all hardware components need to be connected, wired, and configured.

The **Getting Started** guide contains procedures for installing and configuring hardware components (e.g., HMI, controllers, I/O Terminals, EtherCAT Motion Bus, AKD2G Drive, and AKM2G Motor).

NOTE

For extensive information about installing the different hardware components, see this documentation:

- [KAS.Kollmorgen.com](https://www.kollmorgen.com)
- KAS-IDE online help (after KAS has been installed)

This table has links to installation procedures for hardware components:

Component	Installation
HMI (Human-Machine Interface) 	<ul style="list-style-type: none"> • Install the graphic operator interface. • See "HMI - Graphic Operator Interface" (→ p. 16).
Controller 	<ul style="list-style-type: none"> • Install the PCMM or AKD PDMM controller. • See "Install Controllers" (→ p. 16).
EtherCAT Motion Bus 	<ul style="list-style-type: none"> • Set up EtherCAT Motion Bus Communication. • See AKD™ EtherCAT Communication

Component	Installation
I/O Terminal	<ul style="list-style-type: none"> • Install the remote Input/Output Terminal. • See "Remote Input/Output - I/O Terminal" (→ p. 17).
Safety	"Working with SafePLC2 Projects" (→ p. 20)
AKD Drive	<ul style="list-style-type: none"> • Install a AKD or AKD2G Drive. • See AKD Installation Manual and also AKD Quick Start. • Available from KDN: AKD Downloads.
AKM and AKM2G Motor	<ul style="list-style-type: none"> • Install the AKM or AKM2G Motor. • Mechanical and Electrical installation. • Available from KDN: AKM Downloads or AKM2G Downloads.



6.1 HMI - Graphic Operator Interface

This is a list of HMI available component:

HMI Part Number	Description	KVB	Manual
AKI2G-CDA-MOD-05T-000	Graphical Display 7" TFT LCD, Touchscreen	v2.20	
AKI2G-CDA-MOD-07T-000	Graphical Display 5" TFT LCD, Touchscreen	v2.20	
AKI2G-CDB-MOD-07T-000	Graphical Display 7" TFT LCD, Touchscreen	v2.20	
AKI2G-CDB-MOD-12T-000	Graphical Display 12" TFT LCD, Touchscreen	v2.20	
AKI-CDC-MOD-12T-000	Graphical Display 12.1" TFT LCD, Touchscreen	v2.0	
AKI-CDC-MOD-15T-000	Graphical Display 15.4" TFT LCD, Touchscreen	v2.0	
AKI-CDC-MOD-21T-000	Graphical Display 21.5" TFT LCD, Touchscreen	v2.0	

See the [Kollmorgen Support Network](#) for specifications and Technical Manuals.

6.2 Install Controllers

The controller installation information is found here:

Document Title	Description	Manual
AKD PDMM Installation Manual	<ul style="list-style-type: none"> Covers the most important points to install the drive hardware and software. Provides instructions for basic drive setup and connection to a network. 	
PCMM Installation Manual	Covers the most important points of the installation and setup of the controller.	
PCMM2G Installation Manual	Covers the most important points of the installation and setup of the controller.	

6.3 EtherCAT Motion Bus

One EtherCAT master must be connected with all the slaves (drives and I/O terminals) of your system. Details about the installation procedure for the EtherCAT Motion Bus are here:

- AKD2G: Website - [Installation and Setup](#)
 - Click **Apply** to set the Fieldbus filters on the website.
- AKD: Website - [Download - AKD EtherCAT Communications Manual](#)
 - Select the PDF from the list.

6.4 Remote Input/Output - I/O Terminal

This is a list of available I/O components.

See the AKT2G I/O Manual or the online help for detailed information on setting up I/O.

I/O Terminal Part Number	I/O Terminal Description
AKT2G-AC-FAN-001	Fan cartridge for EtherCAT and Bus Terminals.
AKT2G-AN-240-000	<ul style="list-style-type: none"> • 2-channel input terminal PT100 (RTD) for resistance sensors. • 16-bit, 2-, 3-wire system.
AKT2G-AN-400-000	<ul style="list-style-type: none"> • 4-channel thermocouple input terminal. • Preset to type K, with wire breakage detection. • 16-bit
AKT2G-AN-430-000	<ul style="list-style-type: none"> • 4-channel analog input. • Parameter capable • -10/0 to 10V • -20/0/+4 to +20mA • 16-bit
AKT2G-AT-410-000	<ul style="list-style-type: none"> • 4-channel analog output terminal. • 0 to 10V • 1-wire system • 12-bit
AKT2G-AT-425-000	<ul style="list-style-type: none"> • 4-channel analog output terminal. • -10V to +10V • 4 x 2-wire system • 12-bit
AKT2G-BRC-000-000	Brake Chopper Terminal
AKT2G-DN-002-000	<ul style="list-style-type: none"> • Up/down counter 24V_{DC} • 100 kHz • 32-bit counter depth
AKT2G-DN-008-000	<ul style="list-style-type: none"> • 8-channel digital input terminal 24V_{DC}. • Filter 3.0ms • 1-wire system
AKT2G-DNH-008-000	<ul style="list-style-type: none"> • 8-channel digital input terminal 24V_{DC}. • Filter 10μs • 1-wire system
AKT2GJ-DT-008-000	<ul style="list-style-type: none"> • 8-channel digital output terminal 24V_{DC} • 0.5A • 1-wire system
AKT2G-ECT-000-000	EtherCAT Coupler for E-bus terminals
AKT2G-EM-000-000	<ul style="list-style-type: none"> • Bus end cover for E-bus terminals • Cover for power and E-bus contacts, gray
AKT2G-ENC-180-000	<ul style="list-style-type: none"> • 1-channel incremental encoder interface • 32-bit
AKT2G-ENC-190-000	<ul style="list-style-type: none"> • Incremental encoder interface with differential input • 16-bit / 32-bit

I/O Terminal Part Number	I/O Terminal Description
AKT2G-PSF-024-000	<ul style="list-style-type: none"> • Power supply terminal with fuse • 24V_{DC}
AKT2G-SDI-004-000	<ul style="list-style-type: none"> • 4-channel digital input terminal 24V_{DC}. • Safety
AKT2G-SDO-004-000	<ul style="list-style-type: none"> • 4-channel digital input terminal 24V_{DC}. • Safety • 0.5A
AKT2G-SM-L15-000	<ul style="list-style-type: none"> • Stepper motor terminal • 24V_{DC} • 1.5A • Vector control
AKT2G-SM-L50-000	<ul style="list-style-type: none"> • Stepper motor terminal • 50VDC • 5A • Vector control

6.5 Install AKD Drives

Drive Manuals	Description
AKD EtherCAT Manual	Describes the installation, setup, range of functions, and software protocol for the EtherCAT AKD product series.
AKD Installation Manual	<ul style="list-style-type: none"> • Installation manual for AKD and AKD PDMM drives. • Describes the AKD series of digital drives and includes mechanical, electrical, and software installation information needed to safely install AKD.
AKD PDMM Fault Card	<ul style="list-style-type: none"> • Describes the AKD PDMM (including AKD) faults, warnings, error messages, and alarms. • Provides cause and remedy instructions to determine the specifics of the failure and to correct the underlying problem.
AKD PDMM User Manual	<ul style="list-style-type: none"> • Describes the software installation, setup, and operation for the AKD PDMM drive. • Includes basic topics and examples to help set up and use the various features in the drive.
AKD, AKD2G, S700 (in NA) Accessories Manual	Describes the accessories for Kollmorgen digital drive systems and servo drive motors.
AKD2G EtherCAT Manual	Describes the installation, setup, range of functions, and software protocol for the AKD2G product series.
AKD2G Installation Manual	<ul style="list-style-type: none"> • Describes the AKD2G series of digital drives. • Includes mechanical, electrical, software, and functional safety options.
MKD Installation Manual	<ul style="list-style-type: none"> • Installation manual for MKD-N power supply and MKD-C drives. • Describes the MKD devices and includes mechanical, electrical, and software installation information needed to safely install the devices.
S300 Reference Documentation	Kollmorgen website with access to all S300 manuals.
S700 Reference Documentation	Kollmorgen website with access to all S700 manuals.


6.6 Install AKM or AKM2G Motors

See either the [AKM Instructions Manual](#) or the [AKM2G Installation Manual](#).

6.7 Working with SafePLC2 Projects

A node can be added to the Project tree connected to a [SafePLC2](#) project.

- This is used to synchronize a SafePLC2 project with a KAS project.
- The KAS-IDE automatically generates the PDOs for the connected devices and establishes the Black Channel with the EtherCAT Safety network.

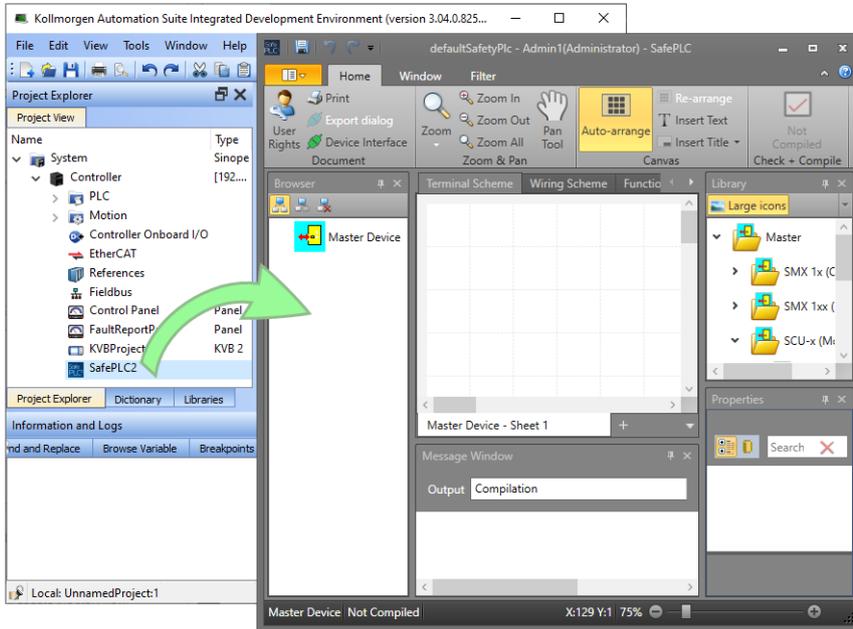

These are the methods for creating the synchronization between KAS Runtime and SafePLC2:

- ["Working with SafePLC2 Projects"](#) (→ p. 20) - This is used when both the KAS-IDE and SafePLC2 are installed on the same computer.
- ["Working with SafePLC2 Projects"](#) (→ p. 20) - This is used when KAS-IDE and SafePLC2 are installed on different computers.

See the online help or the AKT2G I/O Manual for detailed directions.

7 Updating Firmware

Check the KAS software Release Notes to find the AKD PDMM firmware version that matches your KAS software version. The latest version of the firmware can be downloaded from the [Kollmorgen website](#).

To ensure your installation is correct, you have to:


1. Check the current AKD or AKD2G drive firmware.
2. Download the official version, if necessary.
3. Update the firmware.

7.1 Check AKD / AKD2G Drive Firmware with KAS-IDE

1. Create a new project.
2. Set the controller type and IP address.
3. In the Project Explorer, double-click the **EtherCAT** node to open the EtherCAT Devices summary window.
4. In the Devices tab, click the **Scan Devices** button.
5. Choose the **Create...** option to map the physical device to a new device.

NOTE

If a Kollmorgen drive is showing the firmware version as "Unknown", the drive has valid resident firmware (from which to boot), but does not have valid operational firmware. Download and install the latest operational firmware and reboot the AKD / AKD2G.

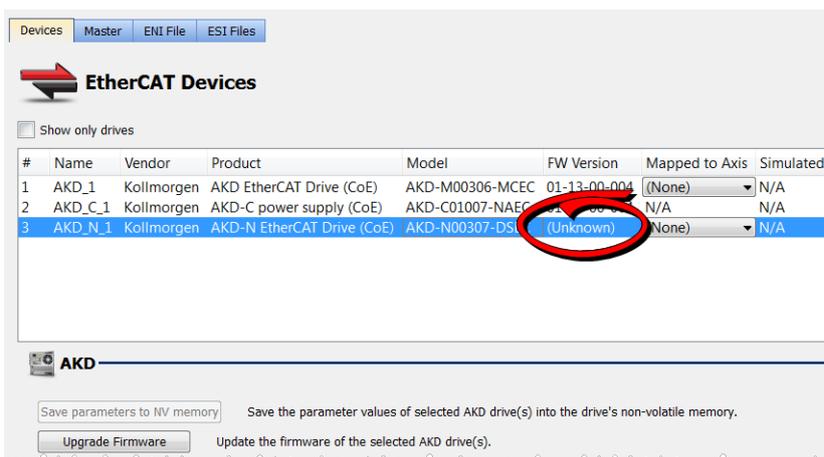

6. If the version is not correct, continue with this procedure:
7. Compile the project.
8. Connect to the controller.
9. Download the project to the controller.
10. If the version is not correct, download the new firmware from the [Media & Downloads](#) website.
11. Continue with "[Download AKD PDMM Drive Firmware](#)" (→ p. 21).

7.2 Download AKD PDMM Drive Firmware

Component	Title	Download Link
800MHz AKD PDMM Drive FW	AKD PDMM Servo Drive Firmware (AKD-M-MCEC-[firmware version])	e
1.2GHz AKD PDMM Drive FW	AKD PDMM Servo Drive Firmware (AKD-M-M1EC-[firmware version])	e


7.2.1 Update the AKD PDMM Drive Firmware with KAS-IDE

1. In the toolbar, deactivate the Online Configuration Mode.
2. Select the drives requiring the same firmware version to be updated.

TIP

The firmware download is limited to 16 drives at a time.

3. Click the **Upgrade Firmware** button.

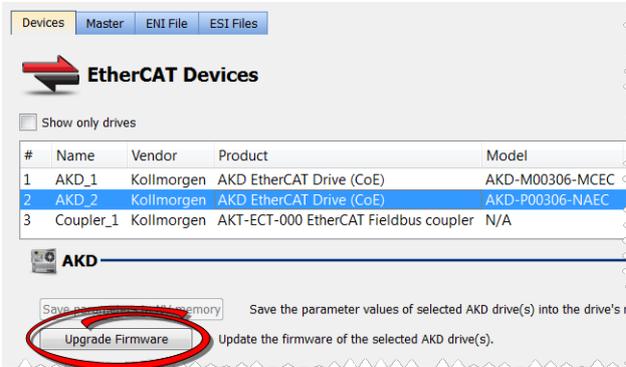

IMPORTANT

Warning dialogs may appear at this point. These warnings include important information about preventing damage to the drives.

4. Browse to the new AKD/AKD2G firmware file. See the Release Notes for the latest supported firmware.
5. Click **Open** to start the updating procedure.

NOTE


This procedure is not possible when applications are running and when the drive is in Online Configuration Mode.

- 6.

7.3 AKD/AKD2G Firmware Update


Based on the File Access over EtherCAT (FoE) protocol, the AKD / AKD2G drive Firmware can be downloaded:

1. Scan the devices and make sure all devices are created.
2. Compile the project.
3. Connect to the controller.
4. Download the project to the controller.
5. Open the **EtherCAT Devices** summary form.
6. Select the drives requiring the same firmware version to be updated.
 - Multiple drives of the same type can be selected. This allows the same firmware file to be downloaded to the selected drives simultaneously.
 - **AKD-C:** Devices with the product description "AKD-C String 2" do not support firmware download.

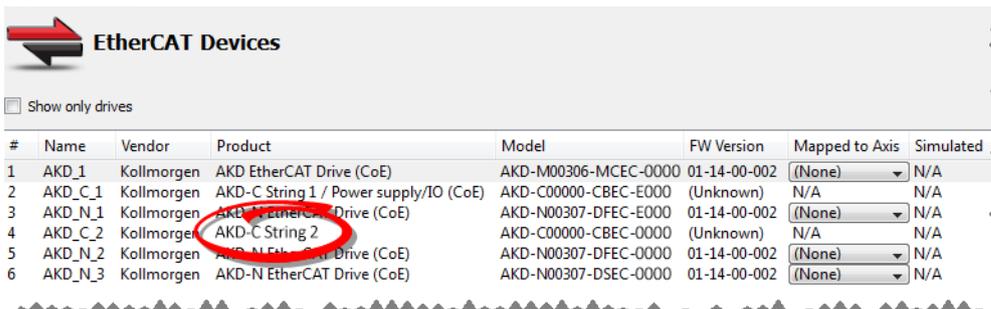

- **AKD-N:** The last four characters can be different. However, the firmware file selected to download must support all the selected models. The file AKD-N-xxEC-*****.i00 supports multiple AKD-N models.
- **AKD-P:** The last four letters of the model number must be the same for simultaneous firmware download.

7. Click the **Upgrade Firmware** button.

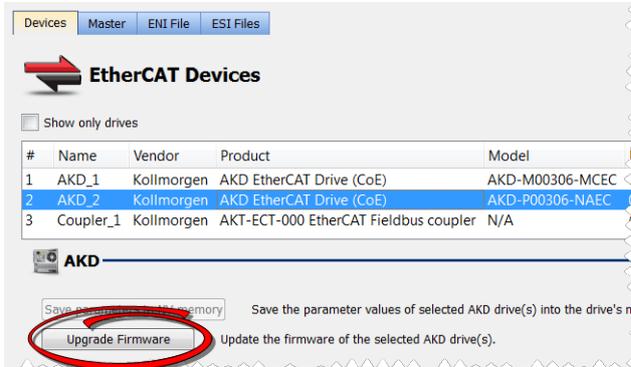

IMPORTANT

Warning dialogs may appear at this point. These warnings include important information about preventing damage to the drives.

8. Browse to the new AKD/AKD2G firmware file. See the Release Notes for the latest supported firmware.
9. Click **Open** to start the updating procedure.

NOTE

This procedure is not possible when applications are running and when the drive is in Online Configuration Mode.

During the firmware download, the AKD/AKD2G Firmware Update window displays a progress bar and these messages are displayed:

- Uploading firmware to the drive.
 - During the download process, the drive LED displays [dL].
 - Additional codes may appear during the download.
 - See either AKD or AKD2G Display Codes for a description of codes related to the firmware download.
- Resetting the drive.
- Firmware update is complete.

CAUTION

While the firmware is downloading to your drive, **do not** remove the 24V logic power. If you remove the 24V logic power during a firmware download, a severe drive crash can occur. If a crash occurs, the drive will restart in a special mode and prompt you to reload the firmware.

IMPORTANT

An AKD drive executing the resident firmware is detected as a different device than an AKD or AKD2G drive executing the operational firmware. Re-scan the network and compile it if a drive's executed firmware has changed since the last scan.

TIP

Power cycling is recommended after completing the update for all drives.

8 Installing Kollmorgen Visualization Builder

Kollmorgen Visualization Builder (KVB) is used to design HMI running on AKI panels.

KVB is an optional feature that is only included in some licenses.

NOTE

Kollmorgen Visualization Builder contains these two installation packages:

- Kollmorgen Visualization Builder(KVB IDE) for development PC
- Visualizer RT (KVB RT) for AKI panel runtime

8.1 Download

Component	Version
Latest Version of Kollmorgen Visual Builder	v.2.40 [2.43.17.0]
Visualizer RT (KVB RT)	v.2.40 [2.43.17.0]

8.2 Installation Procedure

These programs automatically install during the KVB installation.

- Microsoft .NET Compact Framework 3.5
- Microsoft SQL Server Compact 3.5
- Microsoft Visual C++ 2013 - Redistributable Setup


Once Kollmorgen Visualization Builder has finished downloading, complete these installation steps:

1. Double-click the **Setup.exe** file to run the installation Wizard.

NOTE


If KVB was already installed and you want to update to a new version, then running **NeoSetup.msi** is enough.

2. Select the check box to accept the License agreement and click **Next** to start installing **Kollmorgen Visualization Builder**.
3. Select where you want to install **Kollmorgen Visualization Builder** and the application language, then click **Next**.

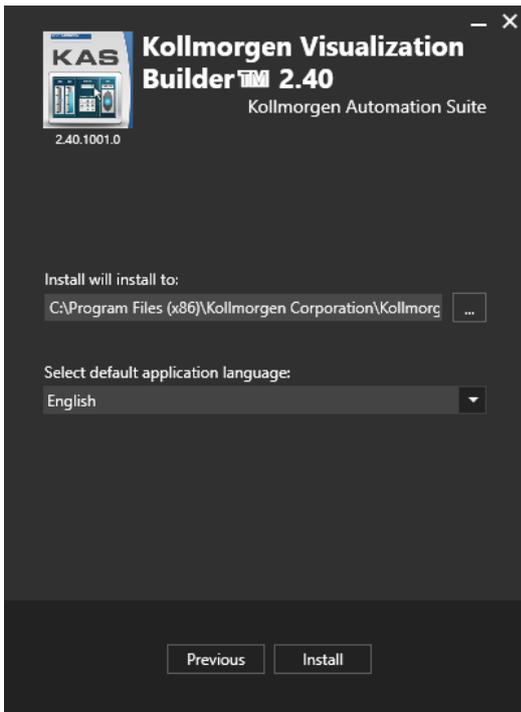

Kollmorgen strongly recommends accepting the default destination folder under `C:\Program Files (x86)\Kollmorgen\Kollmorgen Visualization Builder\`.

4. Click **Install** to start **Kollmorgen Visualization Builder** installation.

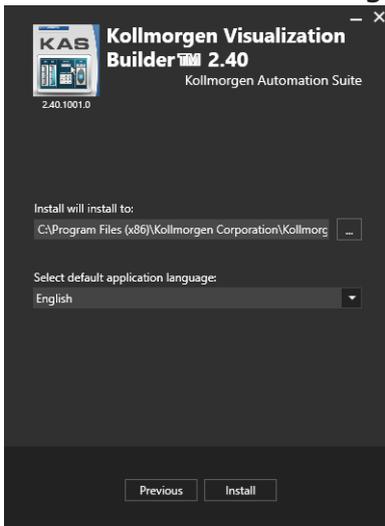

5. Click **Close** or to start using KVB right away, click **Launch**.

KVB Manuals	Description
Kollmorgen Visualization Builder™ Quick Start Guide	The Quick Start covers these important points to: <ul style="list-style-type: none"> • Install and use Kollmorgen Visualization Builder. • Configure HMI Panels and PC operated control applications.
Kollmorgen Visualization Builder™ User Manual	Contains all the content to help with Kollmorgen Visualization Builder.

9 Finalize Installation

Optional: To complete the KAS installation, either:

- Test the system.
- Create a backup image.

9.1 Test the Installation

To conclude the installation, the whole system has to be tested.

A test could be done with the standard Two-Axis Template that corresponds to a simple application.

See the KAS **30 Minutes to Motion** User Manual.

10 Troubleshooting

Faults occur for a variety of reasons, depending on the conditions in your installation. The causes of faults in multi-axis systems can be especially complex.

TIP

You can find more details here:

- The **Troubleshooting** section in the online help.
- The Faults and Warnings section of the online help.
- Search the Kollmorgen Developer Network (KDN) at www.kollmorgen.com/developer-network for answers or submit a question.

11 Copyrights, Licenses, and Trademarks

"Copyrights" (→ p. 28) "Trademarks" (→ p. 28)

"PCMM2G" (→ p. 29) "Disclaimer" (→ p. 29)

11.1 Copyrights

Copyright © 2009-2023 Regal Rexnord Corporation, All Rights Reserved.

11.2 Trademarks

Regal Rexnord and [Kollmorgen](#) are trademarks of [Regal Rexnord Corporation](#) or one of its affiliated companies.

- KAS and AKD are registered trademarks of [Kollmorgen](#).
- [Kollmorgen](#) is part of the [Altra Industrial Motion](#) Company.
- Codemeter is a registered trademark of [WIBU-Systems AG](#).
- EnDat is a registered trademark of Dr. Johannes Heidenhain GmbH.
- EtherCAT is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH.
- Ethernet/IP Communication Stack: copyright (c) 2009, Rockwell Automation.
- Ethernet/IP is a registered trademark of ODVA, Inc.
- [Ghostscript](#) is a registered trademark of Artifex Software, Inc. and is distributed under the [AGPL](#) license.
- HIPERFACE is a registered trademark of Max Stegmann GmbH.
- [PLCopen](#) is an independent association providing efficiency in industrial automation.
- PROFINET is a registered trademark of PROFIBUS and PROFINET International (PI).
- SIMATIC is a registered trademark of SIEMENS AG.
- SyCon® is a registered trademark of [Hilscher GmbH](#).
- Windows® is a registered trademark of Microsoft Corporation.

Kollmorgen Automation Suite is based on the work of:

- [7-zip](#) (distributed under the terms of the LGPL and the BSD 3-clause licenses - [see terms](#))
- [curl](#) software library
- [JsonCpp](#) software (distributed under the MIT License - [see terms](#))
- [Mongoose](#) software (distributed under the MIT License - [see terms](#))
- [Qt](#) cross-platform SDK (distributed under the terms of the LGPL3; Qt source is available on KDN)
- [Qwt](#) project (distributed under the terms of the [Qwt License](#))
- The [C++ Mathematical Expression Library](#) (distributed under the [MIT License](#))
- [U-Boot](#), a universal boot loader is used by the AKD PDMM and PCMM (distributed under the [terms](#) of the GNU General Public License). The U-Boot source files, copyright notice, and readme are available on the distribution disk that is included with the AKD PDMM and PCMM.
- [Zlib](#) software library

All other product and brand names listed in this document may be trademarks or registered trademarks of their respective owners.

11.3 PCMM2G

The PCMM2G's Operating System (OS) and bootloader (U-Boot) are based on free and open source software, distributed under version 3 of the GNU General Public License as published by the Free Software Foundation. For more information about your rights and obligations with GPL-3.0, see the GNU website: <https://www.gnu.org/licenses/gpl-3.0.html>.

The individual copyright notices, license texts, and disclaimers of warranty for the software components are located in the controller, under the directory: `/usr/share/common-licenses/`.

For more information about accessing the PCMM2G's files, see [SSH Login to a Controller](#).

The OS, bootloader, and their software component's source codes including modifications, copyright notices, license texts, disclaimers of warranty, and the compilation scripts to build the OS image are available from the Kollmorgen web-site: <https://www.kollmorgen.com/en-us/developer-network/downloads>.

The OS image and its corresponding sources file is identified by an "OS-Sources" designator, followed by its version number: OS-Sources-x.xx.x.xxxxx.

The compilation scripts and sources file used to build the OS image is identified by the "OS-Build-Sources" designator, followed by its version number: OS-Build-Sources-x.xx.x.xxxxx.

See [PCMM2G - File Naming Conventions](#) in the KAS online help.

11.4 Disclaimer

The information in this document is believed to be accurate and reliable at the time of its release. Notwithstanding the foregoing, Kollmorgen assumes no responsibility for any damage or loss resulting from the use of this help, and expressly disclaims any liability or damages for loss of data, loss of use, and property damage of any kind, direct, incidental or consequential, in regard to or arising out of the performance or form of the materials presented herein or in any software programs that accompany this document.

All timing diagrams, whether produced by Kollmorgen or included by courtesy of the PLCopen organization, are provided with accuracy on a best-effort basis with no warranty, explicit or implied, by Kollmorgen. The user releases Kollmorgen from any liability arising out of the use of these timing diagrams.

12 Support and Services

About KOLLMORGEN

Kollmorgen is a leading provider of motion systems and components for machine builders. Through world-class knowledge in motion, industry-leading quality and deep expertise in linking and integrating standard and custom products, Kollmorgen delivers breakthrough solutions that are unmatched in performance, reliability and ease-of-use, giving machine builders an irrefutable marketplace advantage.



Join the [Kollmorgen Support \(Developer\) Network](#) for product support. Ask the community questions, search the knowledge base for answers, get downloads, and suggest improvements.



North America

KOLLMORGEN

201 West Rock Road
Radford, VA 24141, USA

Web: www.kollmorgen.com

Mail: support@kollmorgen.com

Tel.: +1 - 540 - 633 - 3545

Fax: +1 - 540 - 639 - 4162

Europe

KOLLMORGEN Europe GmbH

Pempelfurtstr. 1
40880 Ratingen, Germany

Web: www.kollmorgen.com

Mail: technik@kollmorgen.com

Tel.: +49 - 2102 - 9394 - 0

Fax: +49 - 2102 - 9394 - 3155

South America

Altra Industrial Motion do Brasil

Equipamentos Industriais LTDA.
Avenida João Paulo Ablas, 2970
Jardim da Glória, Cotia - SP
CEP 06711-250, Brazil

Web: www.kollmorgen.com

Mail: contato@kollmorgen.com

Tel.: +55 11 4615-6300

China and SEA

KOLLMORGEN

Room 302, Building 5, Lihpao Plaza,
88 Shenbin Road, Minhang District,
Shanghai, China.

Web: www.kollmorgen.cn

Mail: sales.china@kollmorgen.com

Tel.: +86 - 400 668 2802

Fax: +86 - 21 6248 5367