


PMX™ Series Stepper Motor

Selection Guide

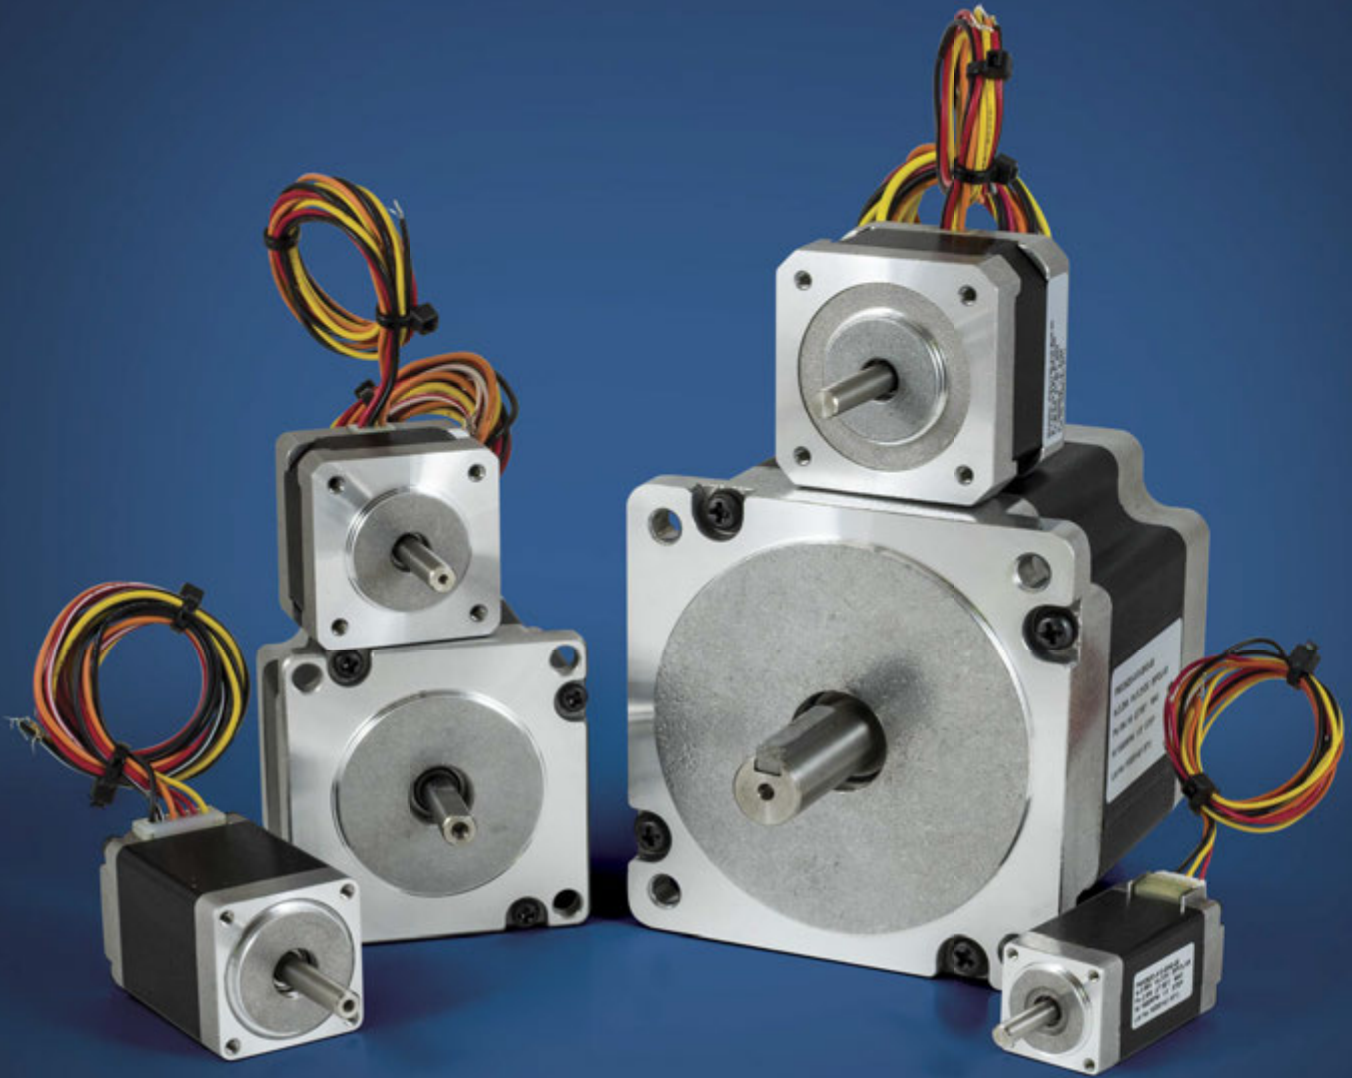

with P-Series Stepper Positioning Drives

KOLLMORGEN®

Because Motion Matters™

Kollmorgen: Removing the Barriers of Design, Sourcing, and Time.

At Kollmorgen, we know that OEM engineers can achieve much more when obstacles aren't in the way.

Integrating Standard and Custom Products: The optimal solution is often not clear-cut. Our application expertise allows us to modify standard products or develop totally custom solutions across our whole product portfolio so that designs can take flight.

Providing Motion Solutions, Not Just Components: As companies reduce their supplier base and have less engineering manpower, they need a total system supplier with a wide range of integrated solutions. Kollmorgen offers complete solutions as well as motion subsystems that combine programming software, engineering services and best-in-class motion components.

Global Footprint: With direct sales, engineering support, manufacturing facilities, and distributors spanning the Americas, Europe, Middle East, and Asia, we're close to OEMs worldwide. Our proximity helps speed delivery and lend support where and when they're needed.

Financial and Operational Stability: Kollmorgen is part of Fortive Corporation. A key driver for growth in all Fortive organizations is the principle of "kaizen" – or continuous improvement. Cross-disciplinary teams of exceptional people evaluate processes and develop plans that result in superior performance.

Kollmorgen: Your partner. In Motion.



PMX Stepper Motor Family

+

Though Kollmorgen PMX stepper motors are fully functional with 3rd-party drives, they are best paired with Kollmorgen P-Series stepper drives.

P-Series Stepper Drives

= Optimal Solution

Table of Contents

▶ PMX™ Series Stepper Motor	4
▶ PMX™ Modifications and Special Features	6
▶ PMX™ Series Technical Overview	7
▶ Specifications, Dimensions, Performance Data and Performance Curves by Frame Size:	
PMX08 Series Stepper Motor	10
PMX11 Series Stepper Motor	12
PMX14 Series Stepper Motor	16
PMX17 Series Stepper Motor	20
PMX23 Series Stepper Motor	28
PMX34 Series Stepper Motor	38
▶ PMX Stepper Motor Model Nomenclature	43
▶ Stepper Motor General Technical Guide	44
▶ Stepper Motor Application Worksheet	46
▶ P-Series Stepper Positioning Drives	48
▶ P-Series Model Nomenclature	53

How To Use This Selection Guide:

This guide covers the technical information required to select and order PMX Series hybrid step motors. Select the proper motor using one of the following procedures:

- If you're already familiar with these motors and the available options, refer to the Model Nomenclature on pg. 52 to verify the part number and corresponding motor options prior to order.
- If you're not familiar with PMX motors and available options: first refer to the Frame Size Overview, pg. 7, and Technical Overview, pg. 8. To further evaluate individual winding specifications refer to the Drawings and Performance Data, using the table of contents above as a reference for each frame size. After all the technical parameters and options are determined, construct a part number using the Model Nomenclature (pg. 52).

Where To Order:

Kollmorgen utilizes an experienced channel of Authorized High-Tech Distributors (AHTDs) to assist our customers with applications, sizing and selection, ordering, and technical support. Visit our Distributor Locator to find locally available distributors.
www.kollmorgen.com/enus/where-to-buy/

Kollmorgen Customer Service Representatives are also available by phone or e-mail and can assist in selecting and contacting local distributors.

- North America: 1-540-633-3545, support@kollmorgen.com
- Europe/Middle East/Africa: +49 (0) 2102 9394 0, think@kollmorgen.com
- Asia: +86-400 661 2802, sales.china@kollmorgen.com

► PMX™ Series Stepper Motor

Kollmorgen's stepper motors are designed with versatility, ease-of-use, and cost-effectiveness in mind. They provide high torque in a small package and come in a wide range of standard sizes, constructions, windings and options.


Our high-performance, brushless, maintenance-free stepper motors provide very precise, extremely cost-effective motion control. These hybrid stepper motors inherently move in small, very precise, 0.9°, or 1.8° increments (400 or 200 steps/revolution). This stepping action is simple to control and does not require complicated, expensive feedback devices.

PMX Series motors are commonly built with special modification and value-added features. Custom leads, shafts, and connectors are routinely provided to effectively solve your application needs.

Kollmorgen's PMX™ stepper motor line delivers breadth and design flexibility at competitive lead times.

Kollmorgen is excited to continue its winning heritage in hybrid stepper motors by introducing the PMX family. Leveraging the best practices from customer preferred products in the POWERMAX and POWERPAC families, the PMX lines deliver breadth and design flexibility with a very competitive lead time. Look no further for that hybrid stepper motor family with local support that gives you the flexibility you need to succeed.

PMX Series motors include smaller Nema 08, 11, and 14 frame sizes in addition to the traditional Nema 17, 23, and 34 frame sizes. Each frame size is built with high quality construction in an affordable, market competitive solution. Numerous co-engineering options are also available including: customizing shafts, encoders, and mounted spur and planetary gearboxes.

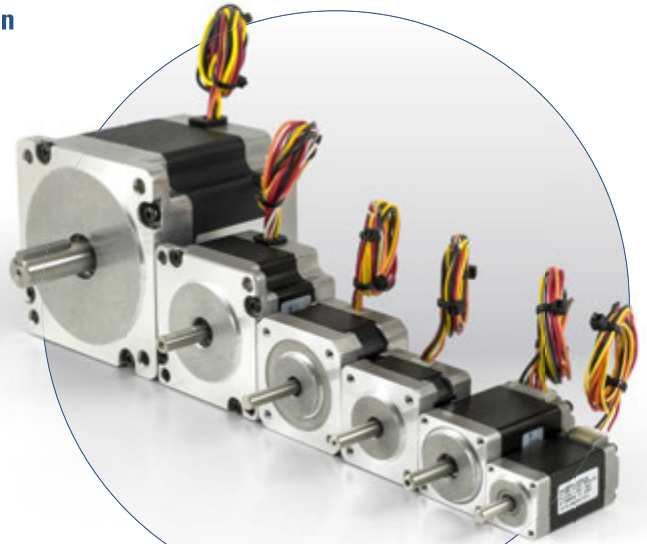

- **Increased Design Flexibility** – six frame sizes (08, 11, 14, 17, 23, 34) each with several stack length and winding options available
- **Minimal Drive Adjustments** – options for 1.8 and 0.9 degree step angles
- **Lower Unit Cost** – PMX motors are priced competitively in today's current stepper market and are the lowest of all Kollmorgen stepper products
- **Quality Construction** translates to reliability in the field and a long service life
- **Localized Support** gives you the delivery terms and immediate technical support you need, meaning quicker time to market and less downtime
- **Flexible Manufacturing** enables Kollmorgen to immediately evaluate modifications and co-engineered solutions for rapid prototyping
- **Easy to Apply Worldwide** – CE, RoHS, REACH

Many Applications


PMX motors allow Kollmorgen customers to fulfill their automation needs at an affordable cost, enabling higher throughput in a wide variety of equipment. In addition, leveraging Kollmorgen's technical expertise and flexible engineering, the PMX is ready for seamless special and co-engineering options, allowing for swifter and easier integration into both new and existing applications.




Chemical Analyzers



3-D Printers



Tabletop Equipment



Metering Pumps

PMX™ Modifications and Special Features

Kollmorgen's flexible manufacturing is shifting the viewpoint on custom motor capabilities.

Kollmorgen offers extensive experience in stepper motor enhancements and value-added stepper motor assemblies. Localized support provides technical solutions, leading to swifter prototype evaluation and time-to-market. Kollmorgen's ability to co-engineer – customize shafts, lead wires, connectors, encoders, gearboxes, etc – provides real flexibility to optimize each motor, making it easier to drop into existing applications with minimal adjustments.

Shaft Modifications

A variety of motor output shaft modifications can be supplied, allowing swifter integration into drive mechanism.

- Special shaft diameters and shaft lengths
- Special shaft details including: flats, dual flats, slots, and thru holes
- Spline shafts, helical gears, fixed acme lead screws

Electrical Modifications

Kollmorgen can swiftly evaluation special winding considerations and attempt to match current, resistance, or inductance requirements for swifter control integration.

Connectors and Cabling

Motors can be supplied with customer-specified connectors for swifter incorporation into existing cabling. Non-standard lead lengths and cable options can also be ordered.

Encoders


Kollmorgen can supply and mount customer-specified encoders. This includes different encoder types (i.e. incremental, absolute) and line counts.

Gearboxes

Kollmorgen has immediate spur and planetary gearbox solutions available. These extend the torque range of the motors and ship pre-mounted from the factory for your convenience.

Complete Sub-Assemblies

Partnering with Kollmorgen for full co-engineering design adds significant value in motion selection. Complete sub-assembly solutions mean less integration and engineering to perform. Sub-assemblies can ship directly from the factory allowing for reduced machine SKU count and swifter production readiness.

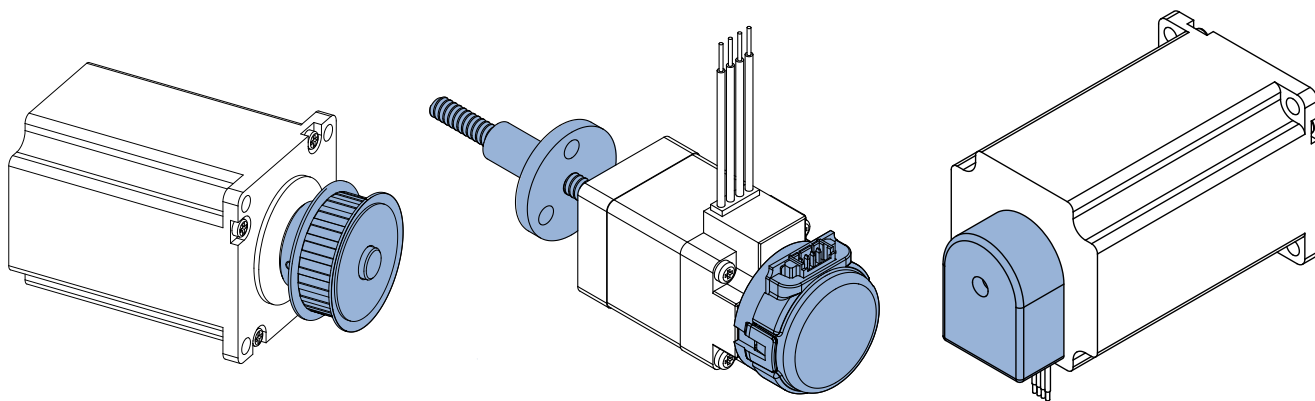

To review non-standard capabilities, contact Kollmorgen today at www.kollmorgen.com

PMX™ Series Technical Overview

PMX Stepper Motor Frame Size Overview

		Series	Stacks	Holding Torque (Motor Mounted)		Length		Features
				Bipolar		in	mm	
				oz-in	Nm			
Size 08 PMX Series		2 Phase, 1.8° Step Motors. Frame size: 0.8 inch, 20 mm						
		PMX081	1	2.50	0.018	1.18	30.0	<ul style="list-style-type: none">• Front shaft flat option• Rear shaft option
		PMX082	2	4.00	0.028	1.65	42.0	
Size 11 PMX Series		2 Phase, 1.8° Step Motors. Frame size: 1.1 inch, 28 mm						
		PMX111	1	10.1	0.071	1.26	32.0	<ul style="list-style-type: none">• Front shaft flat option• Rear shaft option
		PMX112	2	16.1	0.114	1.77	45.0	
		PMX113	3	16.8	0.119	2.01	51.0	
Size 14 PMX Series		2 Phase, 1.8° Step Motors. Frame size: 1.4 inch, 35 mm						
		PMX141	1	14.7	0.104	1.02	26.0	<ul style="list-style-type: none">• Front shaft flat option• Rear shaft option• Rear encoder mounting holes
		PMX142	2	20.1	0.142	1.10	28.0	
		PMX143	3	26.4	0.186	1.42	36.0	
Size 17 PMX Series		2 Phase, 0.9° or 1.8° Step Motors. Frame size: 1.7 inch, 42 mm						
		PMX171 (1.8)	1	28.4	0.201	1.02	26.0	<ul style="list-style-type: none">• Front shaft flat option• Rear shaft option• Integral connector + mating cable option• Bipolar or Unipolar winding available• Rear encoder mounting holes
		PMX172 (1.8)	2	40	0.281	1.32	33.5	
		PMX173 (1.8)	3	61	0.427	1.56	39.5	
		PMX174 (1.8)	4	78	0.551	1.87	47.5	
		PMX171 (1.8)	5	107	0.756	2.36	60.0	
Size 23 PMX Series		2 Phase, 0.9° or 1.8° Step Motors. Frame size: 2.2 inch, 57 mm						
		PMX231 (1.8)	1	102	0.722	1.61	41.0	<ul style="list-style-type: none">• Front shaft flat option• Front shaft seal option• Bipolar or Unipolar winding available• Rear shaft option• Integral connector + mating cable option• Rear encoder mounting holes
		PMX232 (1.8)	2	208	1.47	2.20	56.0	
		PMX233 (1.8)	3	337	2.38	2.99	76.0	
		PMX234 (1.8)	4	378	2.67	3.35	85.0	
Size 34 PMX Series		2 Phase, 1.8° Step Motors. Frame size: 3.4 inch, 86 mm						
		PMX341	1	490	3.46	2.56	65.0	<ul style="list-style-type: none">• Front shaft flat option• Front shaft seal option• Rear shaft option
		PMX342	2	704	4.97	3.15	80.0	
		PMX343	3	1285	9.07	4.65	118.0	
		PM344	4	1739	12.28	6.14	156.0	

PMX™ Series Technical Overview

PMX™ Common Ratings and Characteristics

	PMX08	PMX11	PMX14	PMX17	PMX23	PMX34
Phases	2					
Full Steps Per Revolution	200	200	200	200	400	200
Step Size Angle	1.8°	1.8°	1.8°	1.8°	0.9°	1.8°
Step Angle Accuracy	+/- 5.0%					
Maximum Case Temperature	130° C					
Insulation Class	NEMA Class B, 130° C					
Insulation Resistance	100 Megaohms @ 500 Vdc					
Ambient Temperature	-20.0 to + 40.0 °C					
Dielectric Strength	500 Vac, 1 minute					

PMX Shaft Loading

Motor Frame Size	Max Radial Force at Distance "D" from Mounting Face lb [N]	Dimension "D" inches [mm]	Max Axial Force lb [N]
PMX08	3.4 [15]	0.787 [20.0]	1.4 [6]
PMX11	6.3 [28]		2.3 [10]
PMX14	6.3 [28]		2.3 [10]
PMX17	6.3 [28]		2.3 [10]
PMX23	16.9 [75]		3.4 [15]
PMX34	49.5 [220]		16.5 [60]

Notes:

PMX motors do not include captured front bearings. They may be operated up to the maximum radial and axial loads and achieve an L10 life > 10,000 hours at speeds up to 3000 RPM. For applications with high radial/axial loading, it is recommended that an alternative Kollmorgen stepper series, with heavy duty, long-life bearings, be evaluated.

PMX Agency Approval



CE, Compliance with Directive 2014/30/EU

PMX08 – PMX17

EN 61000-6-3:2007/A1:2011
EN 61000-6-2:2005
EN 55014-2:1997/A2:2008

PMX23 – PMX34

EN 61000-6-3:2007/A1:2011
EN 61000-6-2:2005
EN 55014-2:1997/A2:2008
EN 60034-1:2010



RoHS, Compliance with Directive 2011/65/EU


PMX08 – PMX34



PMX08 – PMX34

PMX™ Connection Information

6-Lead Configuration



6-Lead Unipolar Connection


Driver Connection	Lead Color
A	Black (Blk)
B	Orange (Org)
C	Red
D	Yellow (Yel)
+V	Wht/Blk
+V	Wht/Red

Unipolar Full Step Phase Sequence

STEP	A	B	C	D
1	GND	0	GND	0
2	0	GND	GND	0
3	0	GND	0	GND
4	GND	0	0	GND
1	GND	0	GND	0

CCW ↓ ↑ CW

4-Lead Configuration



4-Lead Bipolar Connection

Driver Connection	Lead Color
A	Black
\bar{A}	Orange
B	Red
\bar{B}	Yellow

Bipolar Full Step Phase Sequence

STEP	A	\bar{A}	B	\bar{B}
1	+	-	-	+
2	-	+	-	+
3	-	+	+	-
4	+	-	+	-
1	+	-	-	+


CCW ↓ ↑ CW

Notes:


- Indicated direction when viewed from the motor drive shaft end.
- Because PMX series does not include any 8-lead configurations, Kollmorgen does not differentiate between Bipolar *Parallel* or *Series* within PMX series nomenclature. All 4-lead are simply stated as Bipolar. All Bipolar winding specifications in this guide represent simple 4-lead connection shown above.

Integral Connector Configurations

PMX17 Cable Assembly

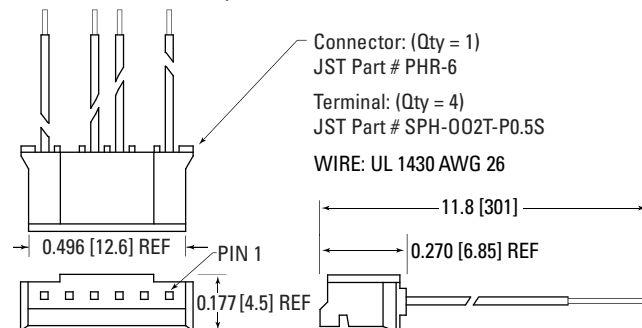

PMX23 Cable Assembly

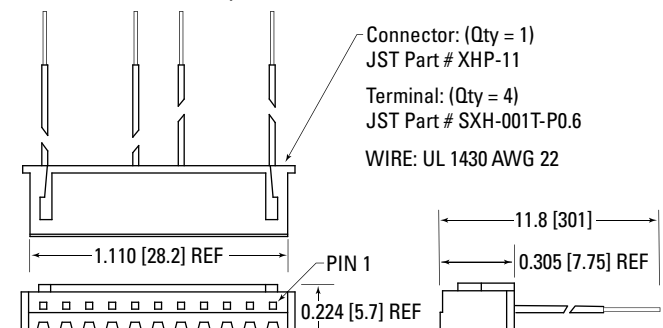

Notes:

- A 4-lead Bipolar, 12 inch (300 mm) mating cable assembly is included for all motors ordered with Integral Connector option. The leadwires exiting this cable assembly should be connected same as 4-lead Bipolar shown above.
- Upon special request, 6-lead Unipolar mating cables are available for Unipolar windings only. Please contact Kollmorgen Customer Support for more information.

PMX08 Series Stepper Motors


PMX08 Standard Options and Specifications

- NEMA Size 08
- Smooth or Flat front shaft flat option
- Single or Rear shaft option
- Bipolar windings


Phases	2
Full Steps Per Revolution	200
Step Size Angle	1.8°
Step Angle Accuracy %	+/- 5.0
Maximum Case Temperature	130° C
Insulation Class	NEMA Class B, 130° C
Insulation Resistance	100 Megaohms @ 500 Vdc
Ambient Temperature	-20.0 to + 40.0 °C
Dielectric Strength	500 Vac, 1 minute
Certifications:	CE, RoHS, REACH compliant



PMX08 Dimensions

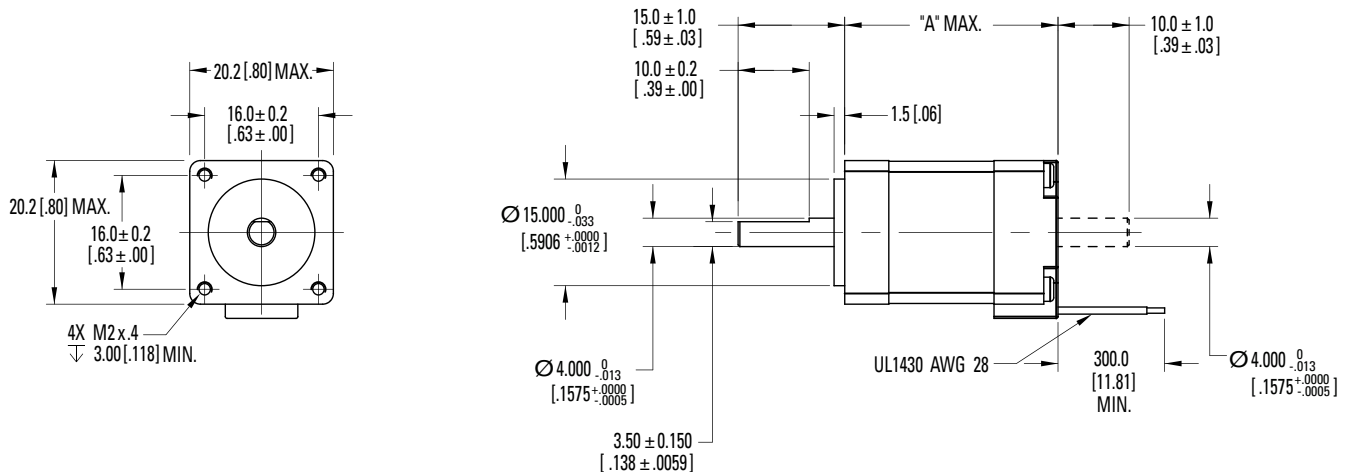

Model	"A" MAX
PMX081	30 [1.18]
PMX082	42 [1.65]

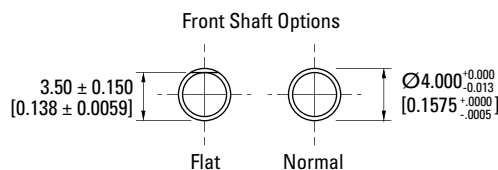

Dimensions in mm [inches]



PMX08 (1.8° Step) Performance Data

PMX08			Configuration		Holding Torque (2 phases on)	Rated Current/ Phase	Phase Resistance	Phase Inductance	Thermal Resistance	Rotor Inertia	Weight	Shaft Loading	
Stack	Winding	Step	Bipolar	Unipolar	oz-in [Nm] +/-12%	Amps DC	Ohms +/-10%	mH Typical	Mounted °C/Watt	oz-in-s ² [kg-m ²]	lb [kg]	Radial Force	Axial Force
												lb [N]	lb [N]
1	A	1	•		2.5 [0.018]	0.53	6.70	2.00	15.85	2.84E-05 [2.01E-07]	0.1 [0.06]	4.50 [20.0]	0.45 [2.0]
2	A	1	•		4.0 [0.028]	0.66	5.28	1.64	12.99	5.11E-05 [3.61E-07]	0.2 [0.08]	4.50 [20.0]	0.45 [2.0]

Notes:

1. All ratings typical and at 40° C unless otherwise noted.
2. Rated current is T = 80° C, ON-PLATE; motor mounted to square aluminum plate heatsink, 2.5X motor diameter, 5mm thick.
3. Small signal inductance as measured with impedance bridge @ 1 KHz, 1 amp.

PMX08 Series (Bipolar - 1.8° Step) Performance Curves

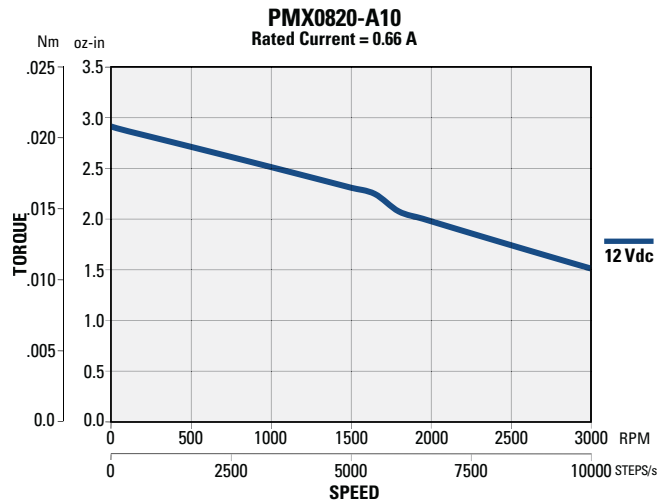
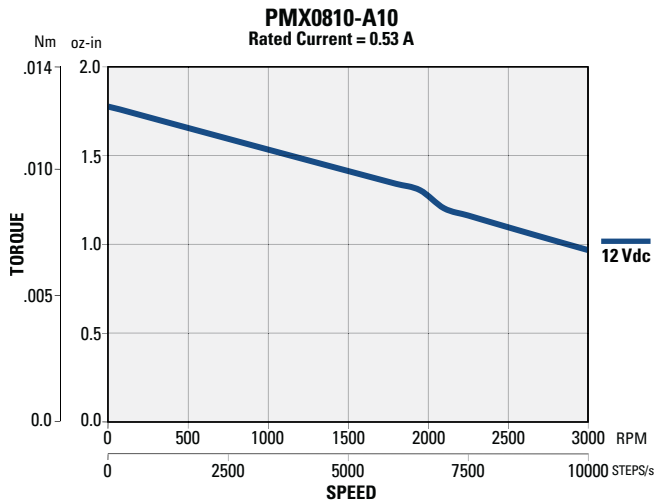


*Complete PMX series model nomenclature can be found on page 43.


PMX11 SERIES STEPPER MOTORS

- NEMA Size 11
- Front shaft flat option
- Rear shaft option
- Integral connector option
- Bipolar windings

Phases	2
Full Steps Per Revolution	200
Step Size Angle	1.8°
Step Angle Accuracy %	+/- 5.0
Maximum Case Temperature	130° C
Insulation Class	NEMA Class B, 130 °C
Insulation Resistance	100 Megaohms @ 500 Vdc
Ambient Temperature	-20.0 to + 40.0 °C
Dielectric Strength	500 Vac, 1 minute
Certifications:	CE, RoHS, REACH compliant

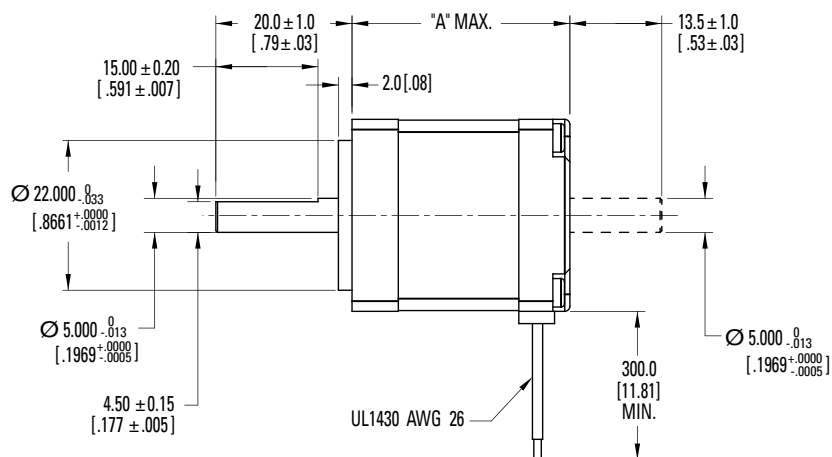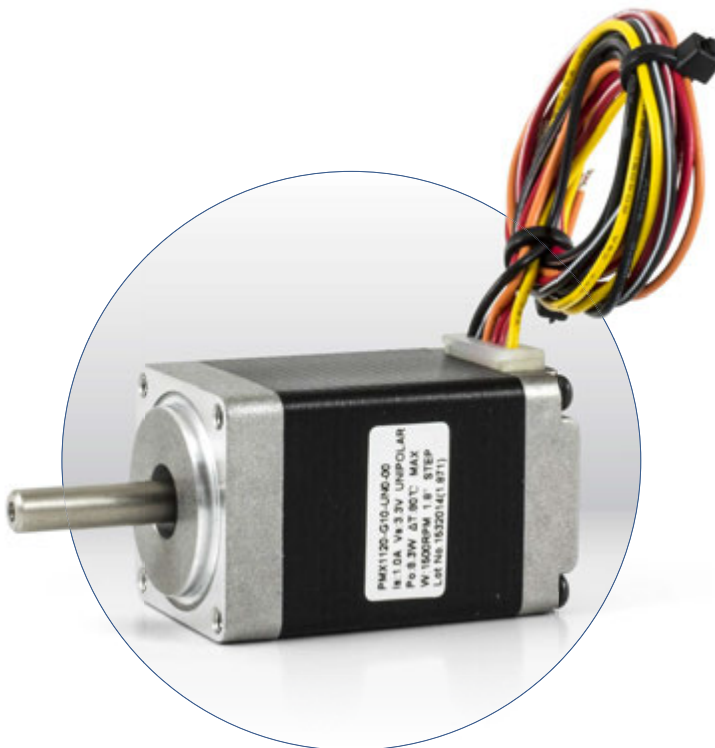

Model	"A" MAX
PMX111	32 [1.26]
PMX112	45 [1.77]
PMX113	51 [2.01]

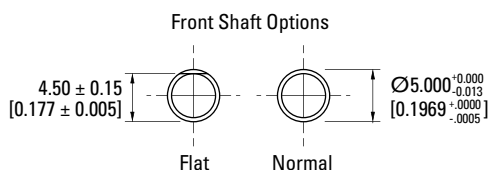

12

PMX11 (1.8° Step) Performance Data

PMX11			Configuration		Holding Torque (2 phases on)	Rated Current/ Phase	Phase Resistance	Phase Inductance	Thermal Resistance	Rotor Inertia	Weight	Shaft Loading	
Stack	Winding	Step	Bipolar	Unipolar	oz-in [Nm] +/-12%	Amps DC	Ohms +/-10%	mH Typical	Mounted °C/Watt	oz-in-s ² [kg-m ²]	lb [kg]	Radial Force	Axial Force
1	A	1	•		9.9 [0.070]	1.38	1.50	0.89	11.17	1.28E-04 [9.00E-07]	0.2 [0.11]	6.30 [28.0]	2.25 [10.0]
1	B	1	•		10.1 [0.071]	0.70	5.41	3.57					
2	A	1	•		16.1 [0.114]	1.61	1.38	0.93	8.94	1.70E-04 [1.20E-06]	0.3 [0.14]	6.30 [28.0]	2.25 [10.0]
2	B	1	•		16.1 [0.114]	0.71	6.56	4.78					
3	A	1	•		16.8 [0.119]	1.53	1.61	1.20	8.35	2.56E-04 [1.81E-06]	0.4 [0.20]	6.30 [28.0]	2.25 [10.0]
3	B	1	•		16.7 [0.118]	0.63	9.07	7.01					







Notes:

1. All ratings typical and at 40° C unless otherwise noted.
2. Rated current is T = 80° C, ON-PLATE; motor mounted to square aluminum plate heatsink, 2.5X motor diameter, 5mm thick.
3. Small signal inductance as measured with impedance bridge @ 1 KHz, 1 amp.

*Complete PMX series model nomenclature can be found on page 43.

PMX11 Series Stepper Motors

PMX11 Series (Bipolar - 1.8° Step) Performance Curves

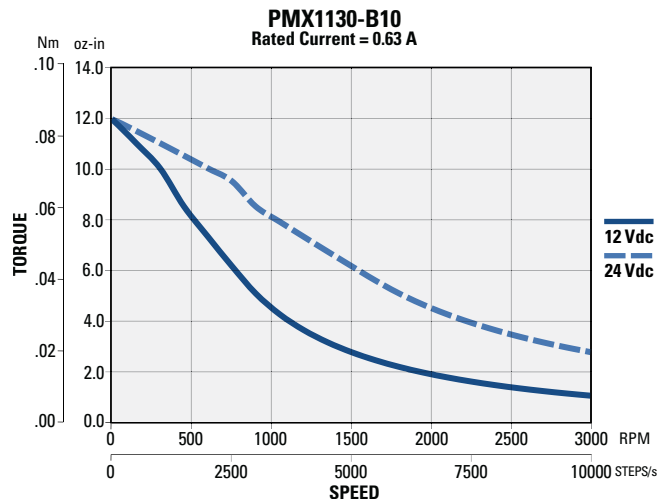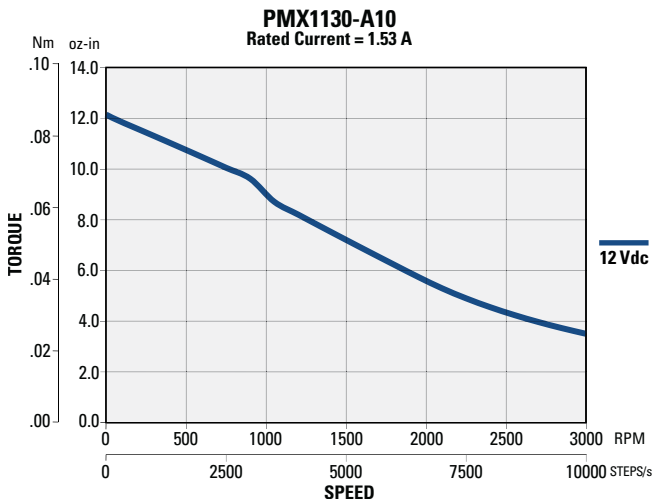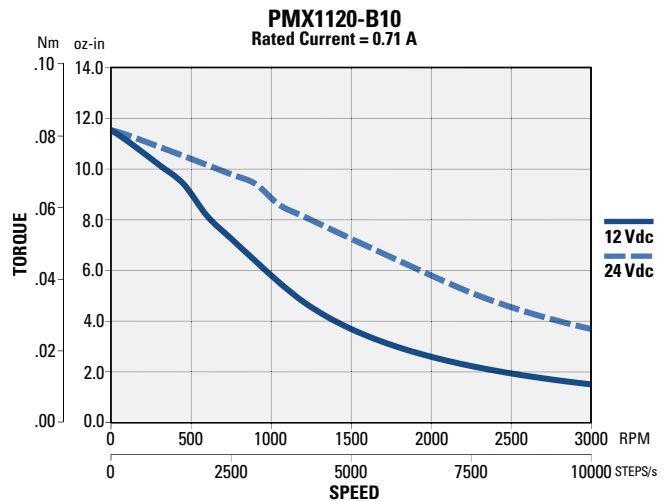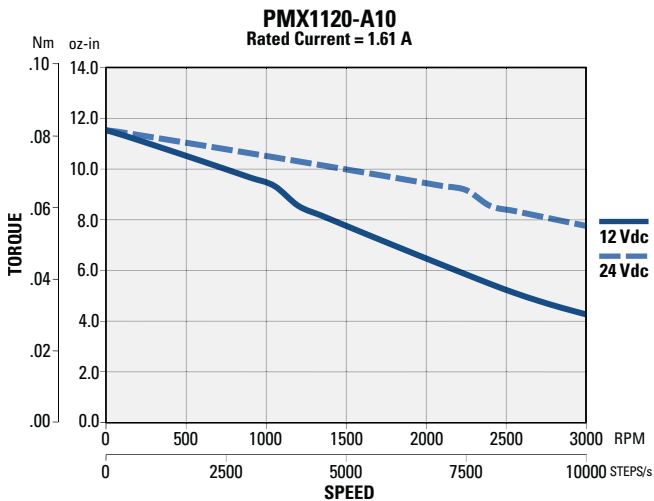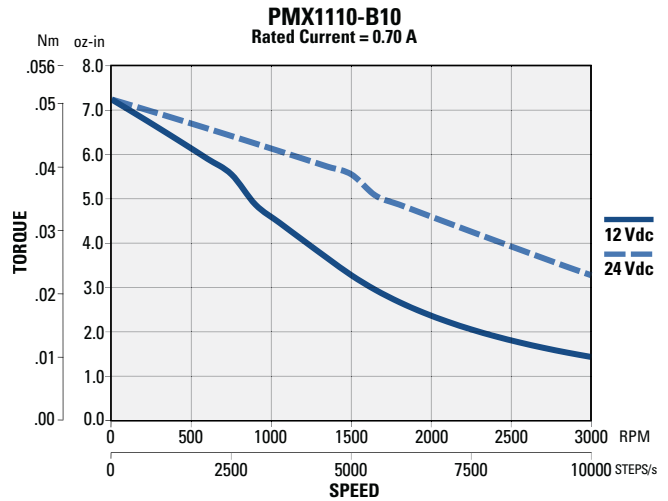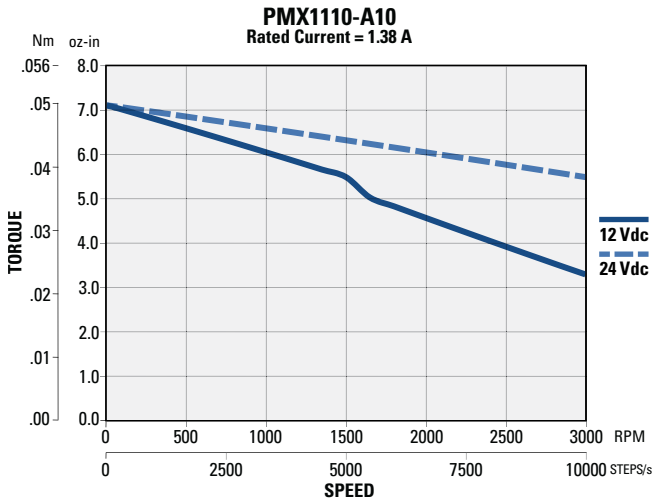

Notes




PMX14 Series Stepper Motors


PMX14 Standard Options and Specifications

- NEMA Size 14
- Front shaft flat option
- Single, rear shaft, or rear shaft + encoder holes option
- Bipolar windings


Phases	2
Full Steps Per Revolution	200
Step Size Angle	1.8°
Step Angle Accuracy %	+/- 5.0
Maximum Case Temperature	130° C
Insulation Class	NEMA Class B, 130° C
Insulation Resistance	100 Megaohms @ 500 Vdc
Ambient Temperature	-20.0 to + 40.0° C
Dielectric Strength	500 Vac, 1 minute
Certifications:	CE, RoHS, REACH compliant

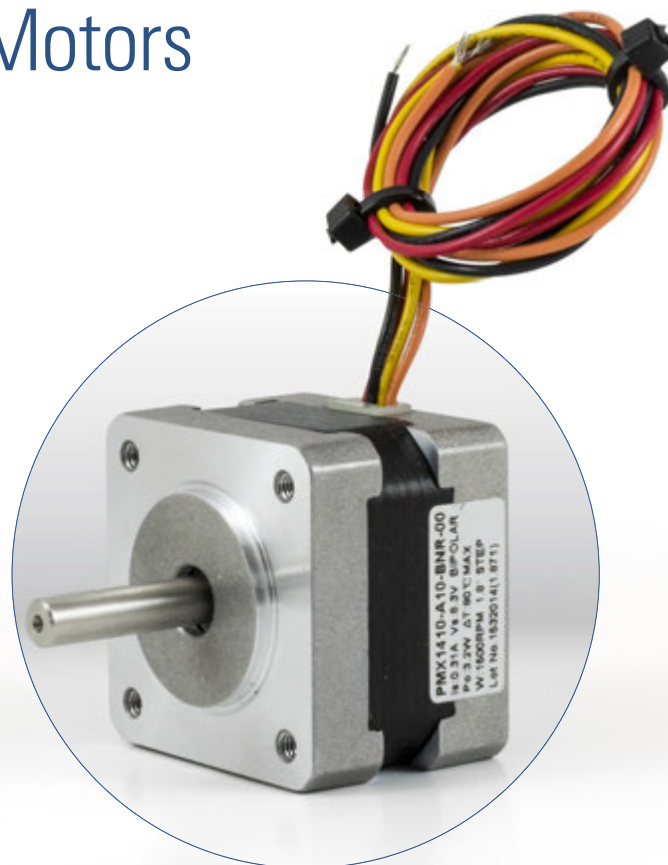

PMX14 Dimensions

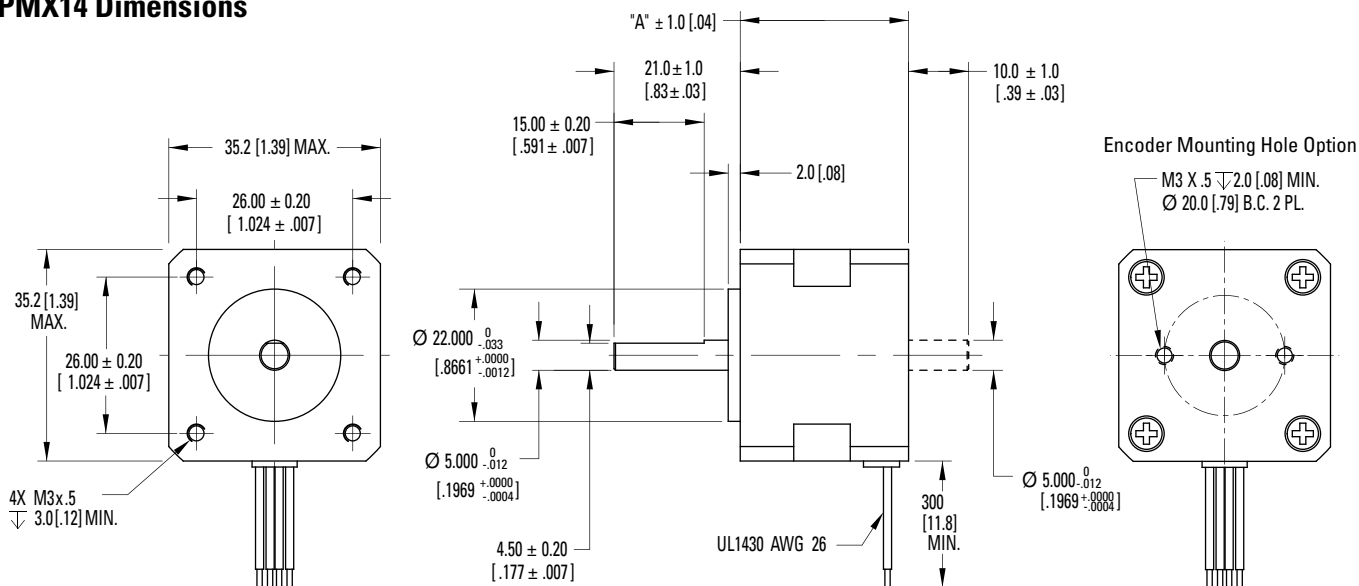

Model	"A" MAX
PMX141	26 [1.02]
PMX142	28 [1.10]
PMX143	36 [1.42]

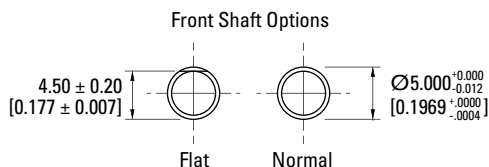

Dimensions in mm [inches]

PMX14 (1.8° Step) Performance Data

PMX14			Configuration		Holding Torque (2 phases on)	Rated Current/ Phase	Phase Resistance	Phase Inductance	Thermal Resistance	Rotor Inertia	Weight	Shaft Loading	
Stack	Winding	Step	Bipolar	Unipolar	oz-in [Nm] +/-12%	Amps DC	Ohms +/-10%	mH Typical	Mounted °C/Watt	oz-in-s ² [kg-m ²]	lb [kg]	Radial Force	Axial Force
1	A	1	•		13.5 [0.095]	0.31	28.61	30.62	10.81	1.420E-04 [1.00E-06]	0.3 [0.13]	6.30 [28.0]	2.25 [10.0]
1	B	1	•		14.7 [0.104]	0.70	5.69	7.75					
2	A	1	•		15.8 [0.112]	0.36	22.23	14.63	10.11	1.560E-04 [1.10E-06]	0.3 [0.14]	6.30 [28.0]	2.25 [10.0]
2	B	1	•		19.8 [0.140]	0.74	5.43	6.56					
2	C	1	•		20.1 [0.142]	1.41	1.54	1.86					
3	A	1	•		26.3 [0.186]	1.21	2.57	4.39	8.00	1.990E-04 [1.41E-06]	0.4 [0.18]	6.30 [28.0]	2.25 [10.0]
3	B	1	•		26.1 [0.184]	0.82	5.49	9.30					
3	C	1	•		26.4 [0.186]	1.60	1.51	2.54					






Notes:

1. All ratings typical and at 40° C unless otherwise noted.
2. Rated current is T = 80° C, ON-PLATE; motor mounted to square aluminum plate heatsink, 2.5X motor diameter, 5mm thick.
3. Small signal inductance as measured with impedance bridge @ 1 KHz, 1 amp.




*Complete PMX series model nomenclature can be found on page 43.

PMX14 Series Stepper Motors

PMX14 Series (Bipolar - 1.8° Step) Performance Curves

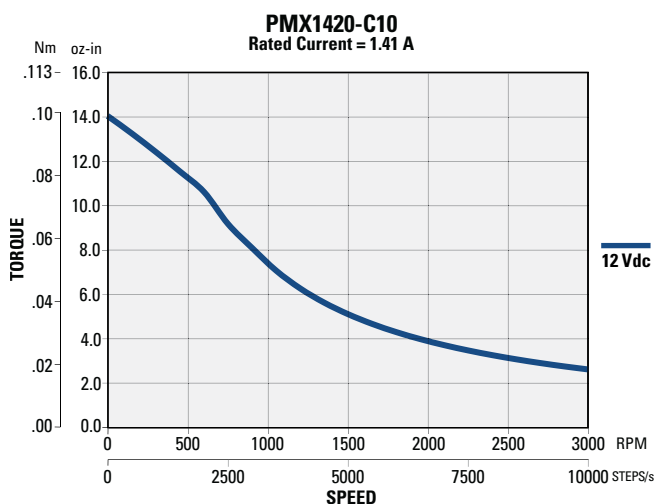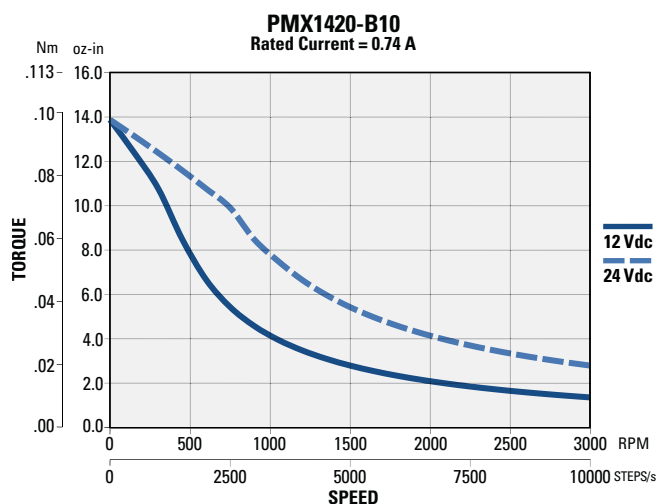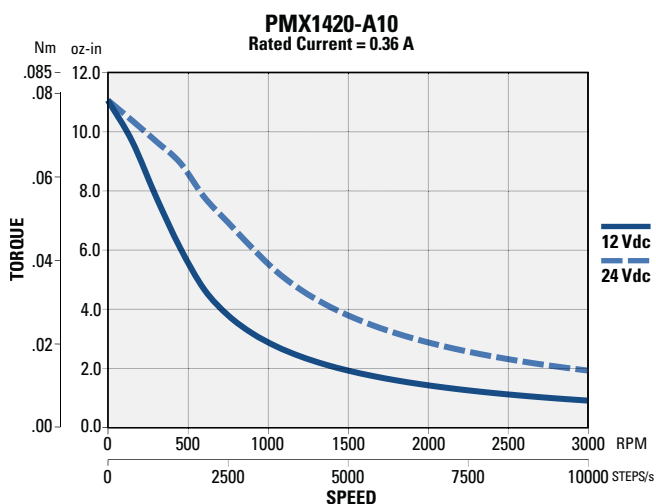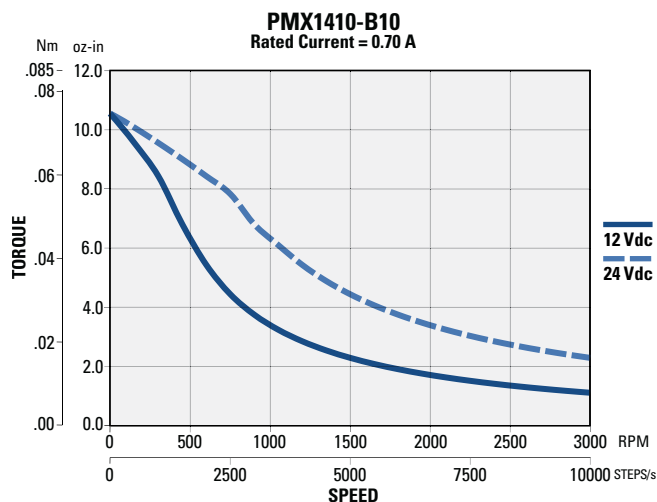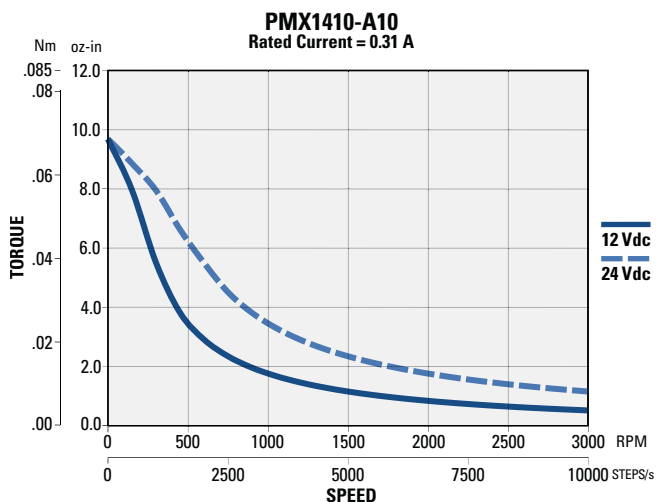

PMX14 Series (Bipolar - 1.8° Step) Performance Curves

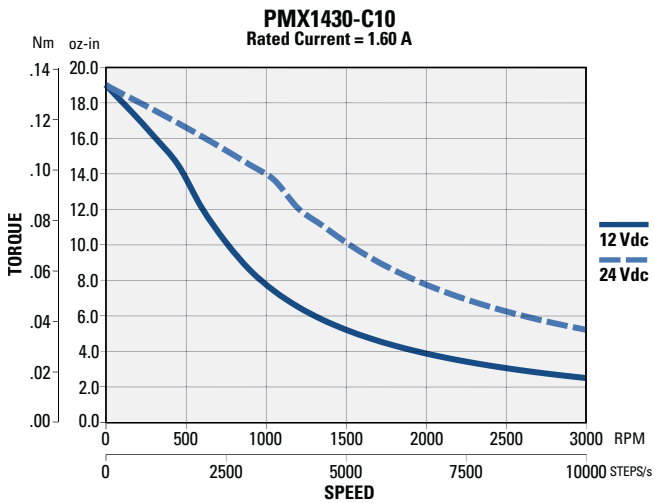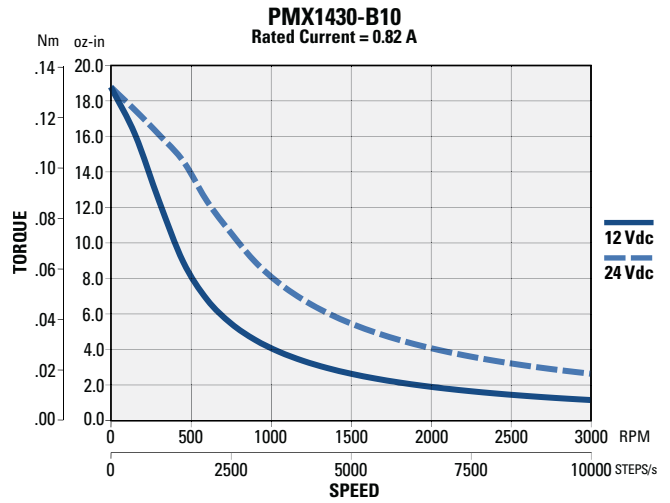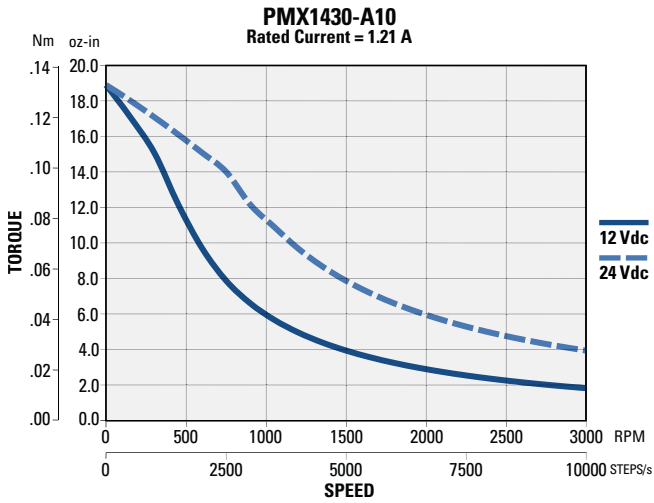

PMX17 Series Stepper Motors


PMX17 Standard Options and Specifications

- NEMA Size 17
- Front shaft flat option
- Rear shaft option
- Integral connector option
- Rear encoder mounting holes
- Bipolar and Unipolar windings

Phases	2
Full Steps Per Revolution	200
Step Size Angle	1.8°, 0.9°
Step Angle Accuracy %	+/- 5.0
Maximum Case Temperature	130 °C
Insulation Class	NEMA Class B, 130 °C
Insulation Resistance	100 Megaohms @ 500 Vdc
Ambient Temperature	-20.0 to + 40.0 °C
Dielectric Strength	500 Vac, 1 minute
Certifications:	CE, RoHS, REACH compliant





PMX17 Dimensions

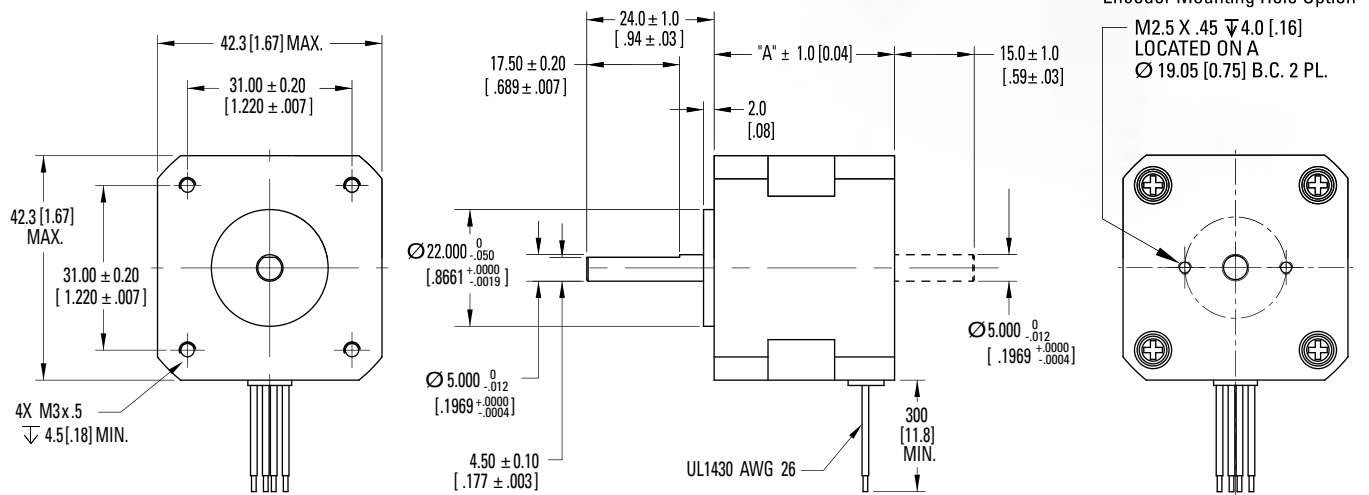

Dimensions in mm [inches]

Model	"A" MAX
PMX171	26 [1.02]
PMX172	33.5 [1.32]
PMX173	39.5 [1.56]
PMX174	47.5 [1.87]
PMX175	60 [2.36]

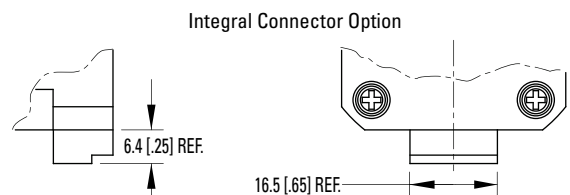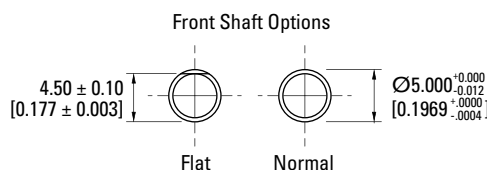

A 4-lead Bipolar, 12 inch (300 mm) mating cable assembly is included for all motors ordered with Integral Connector option.

PMX17 (1.8° Step) Performance Data

PMX17			Configuration		Holding Torque (2 phases on)	Rated Current/ Phase	Phase Resistance	Phase Inductance	Thermal Resistance	Rotor Inertia	Weight	Shaft Loading	
Stack	Winding	Step	Bipolar	Unipolar	oz-in [Nm] +/-12%	Amps DC	Ohms +/-10%	mH Typical	Mounted °C/Watt	oz-in-s ² [kg-m ²]	lb [kg]	Radial Force lb [N]	Axial Force lb [N]
1	A	1	•		28.4 [0.201]	0.39	24.80	31.09	7.98	2.84E-04 [2.01E-06]	0.3 [0.15]	6.30 [28.0]	2.25 [10.0]
1	B	1	•		27.0 [0.191]	0.69	7.74	8.35					
2	A	1	•		39.2 [0.277]	1.48	2.00	2.56	7.00	4.97E-04 [3.51E-06]	0.5 [0.22]	6.30 [28.0]	2.25 [10.0]
2	B	1	•		38.0 [0.268]	1.00	4.25	5.13					
2	H	1	•		39.5 [0.279]	0.31	44.78	60.73					
2	H	1		•	27.9 [0.197]	0.43	22.37	15.18					
2	J	1	•		39.8 [0.281]	0.74	7.76	10.65					
2	J	1		•	28.1 [0.199]	1.04	3.86	2.66					
3	A	1	•		60.2 [0.425]	1.60	1.74	3.16	6.92	7.67E-04 [5.42E-06]	0.6 [0.28]	6.30 [28.0]	2.25 [10.0]
3	B	1	•		60.1 [0.424]	1.52	1.92	3.48					
3	G	1	•		58.4 [0.412]	0.26	62.75	109.85					
3	G	1		•	41.3 [0.292]	0.37	31.35	27.46					
3	H	1	•		58.8 [0.415]	0.55	13.92	24.74					
3	H	1		•	41.6 [0.294]	0.78	6.94	6.19					
3	J	1	•		60.5 [0.427]	0.80	6.64	12.62					
3	J	1		•	42.8 [0.302]	1.14	3.30	3.16					
4	A	1	•		76.0 [0.537]	1.71	1.82	2.98	5.77	9.66E-04 [6.82E-06]	0.8 [0.35]	6.30 [28.0]	2.25 [10.0]
4	B	1	•		75.7 [0.535]	2.17	1.16	1.83					
4	G	1	•		78.1 [0.552]	0.30	57.16	105.47					
4	G	1		•	55.2 [0.390]	0.42	28.56	26.37					
4	H	1	•		70.7 [0.499]	0.57	15.91	22.67					
4	H	1		•	50.0 [0.353]	0.80	7.93	5.67					
4	J	1	•		70.9 [0.501]	0.85	7.08	10.08					
4	J	1		•	50.1 [0.354]	1.20	3.52	2.52					
5	A	1	•		102.2 [0.722]	1.02	5.87	12.28	4.78	1.45E-03 [1.02E-05]	1.1 [0.50]	6.30 [28.0]	2.25 [10.0]
5	B	1	•		103.2 [0.729]	1.76	2.02	4.26					
5	G	1	•		107.1 [0.756]	0.73	11.67	27.62					
5	G	1		•	75.7 [0.535]	1.03	5.81	6.90					

Notes:

1. All ratings typical and at 40° C unless otherwise noted.
2. Rated current is T = 80° C, ON-PLATE; motor mounted to square aluminum plate heatsink, 2.5X motor diameter, 5mm thick.
3. Small signal inductance as measured with impedance bridge @ 1 KHz, 1 amp.

*Complete PMX series model nomenclature can be found on page 43.

PMX17 Series Stepper Motors







PMX17 (0.9° Step) Performance Data

PMX17			Configuration		Holding Torque (2 phases on)	Rated Current/ Phase	Phase Resistance	Phase Inductance	Thermal Resistance	Rotor Inertia	Weight	Shaft Loading	
Stack	Winding	Step	Bipolar	Unipolar	oz-in [Nm] +/-12%	Amps DC	Ohms +/-10%	mH Typical	Mounted °C/Watt	oz-in-s ² [kg-m ²]	lb [kg]	Radial Force lb [N]	Axial Force lb [N]
2	A	9	•		38.1 [0.269]	1.41	2.20	5.69	7.00	4.97E-04 [3.51E-06]	0.5 [0.22]	6.30 [28.0]	2.25 [10.0]
2	B	9	•		36.0 [0.254]	1.00	4.25	9.02					
2	H	9	•		36.4 [0.257]	0.44	21.49	48.70					
2	H	9		•	25.7 [0.182]	0.62	10.73	12.18					
3	A	9	•		55.9 [0.395]	1.60	1.74	4.50	6.92	7.67E-04 [5.42E-06]	0.6 [0.28]	6.30 [28.0]	2.25 [10.0]
3	B	9	•		55.8 [0.394]	1.52	1.92	4.96					
3	H	9	•		56.8 [0.401]	0.52	15.65	44.61					
3	H	9		•	40.2 [0.284]	0.74	7.81	11.15					
4	A	9	•		68.6 [0.484]	1.67	1.91	5.99	5.77	9.66E-04 [6.82E-06]	0.8 [0.35]	6.30 [28.0]	2.25 [10.0]
4	B	9	•		67.5 [0.477]	2.17	1.16	3.31					
4	G	9	•		70.2 [0.496]	0.29	61.31	177.65					
4	G	9		•	49.2 [0.348]	0.41	30.64	44.41					

Notes:







1. All ratings typical and at 40° C unless otherwise noted.
2. Rated current is T = 90° C, ON-PLATE; motor mounted to square aluminum plate heatsink, 2.5X motor diameter, 5mm thick.
3. Small signal inductance as measured with impedance bridge @ 1 KHz, 1 amp.
4. Complete PMX series model nomenclature can be found on page 52.

PMX17 Series (Bipolar - 1.8° Step) Performance Curves

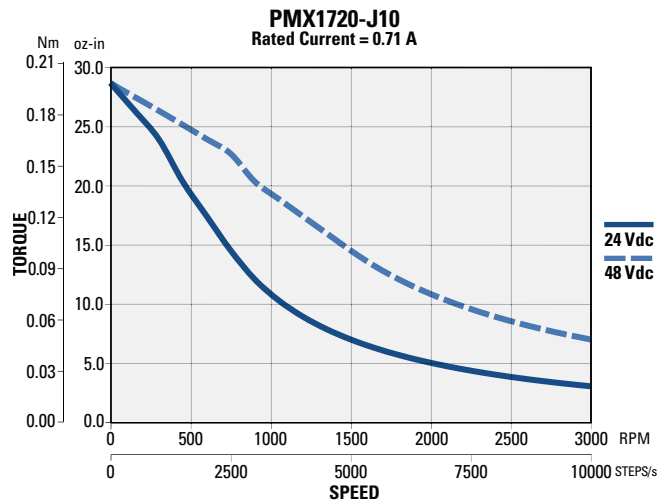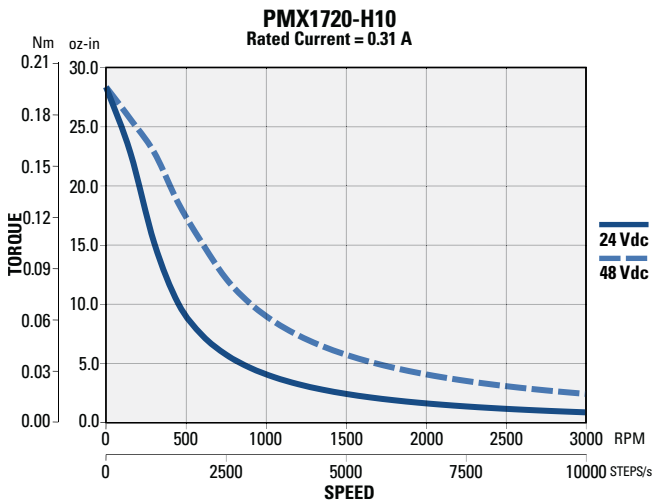
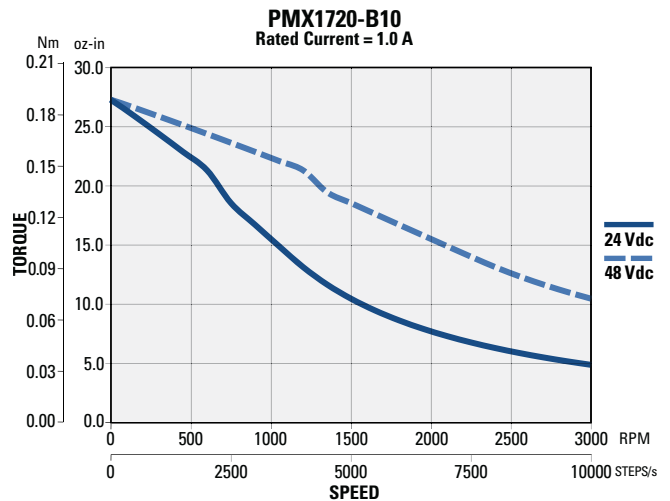
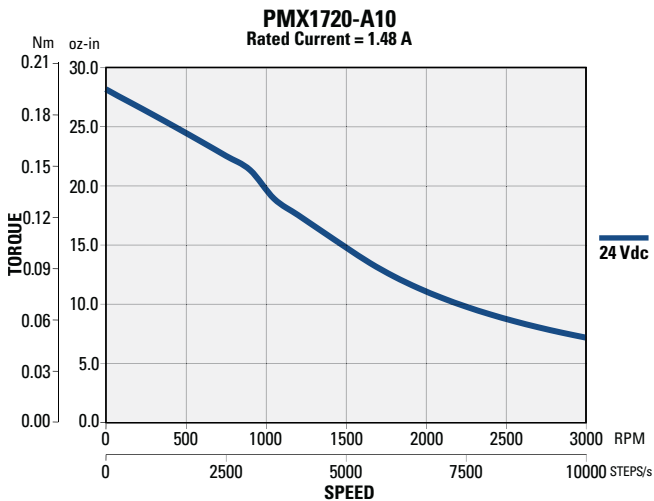
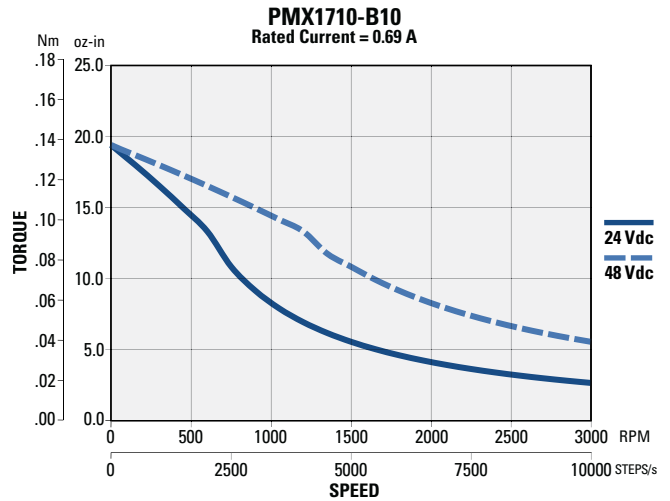
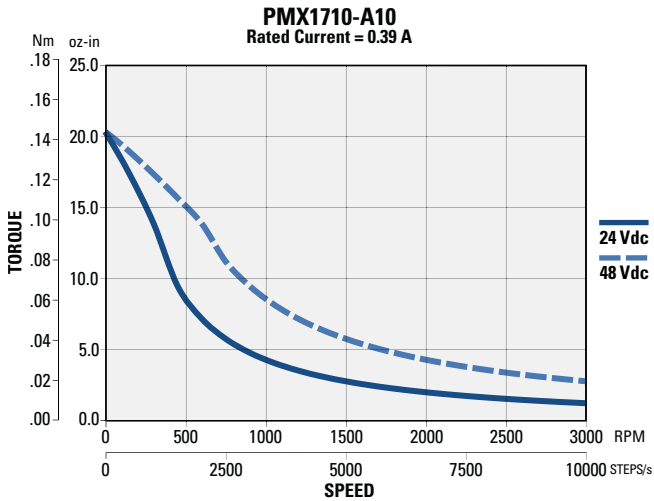


PMX17 Series Stepper Motors

PMX17 Series (Bipolar - 1.8° Step) Performance Curves

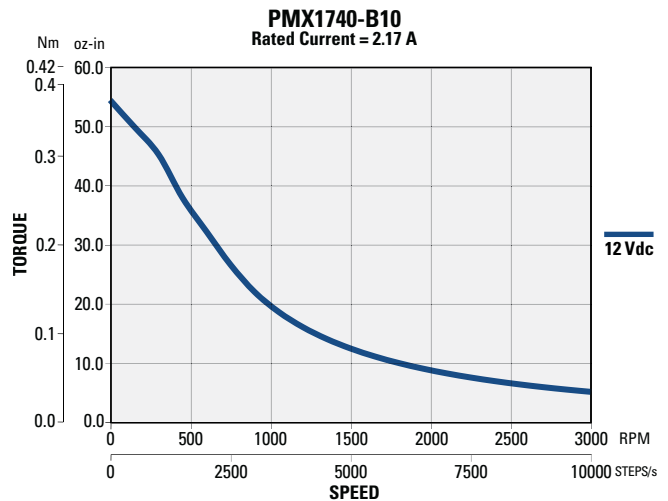
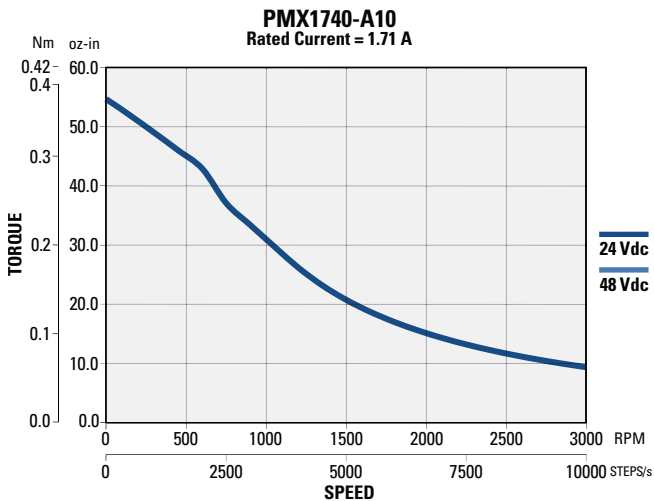
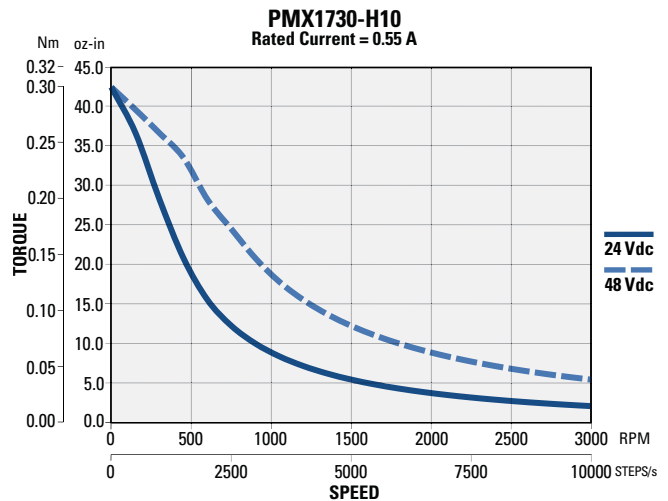
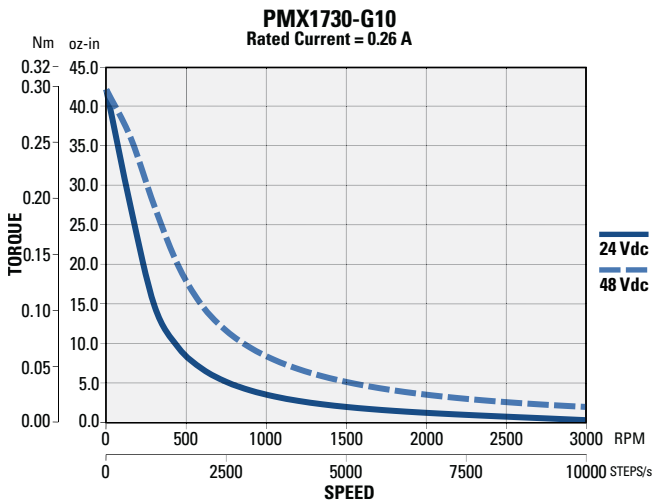
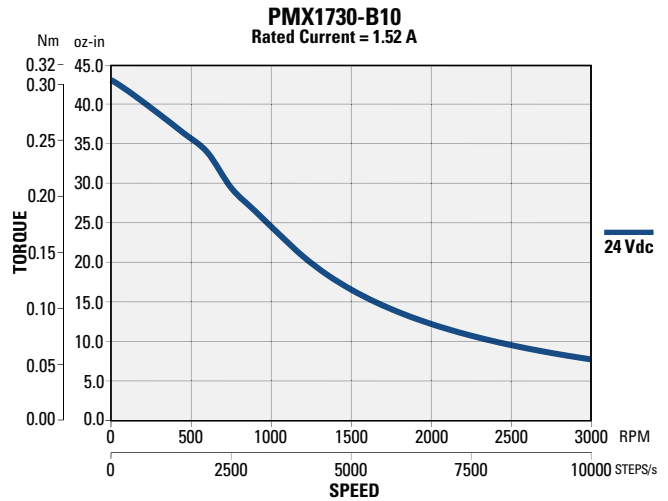
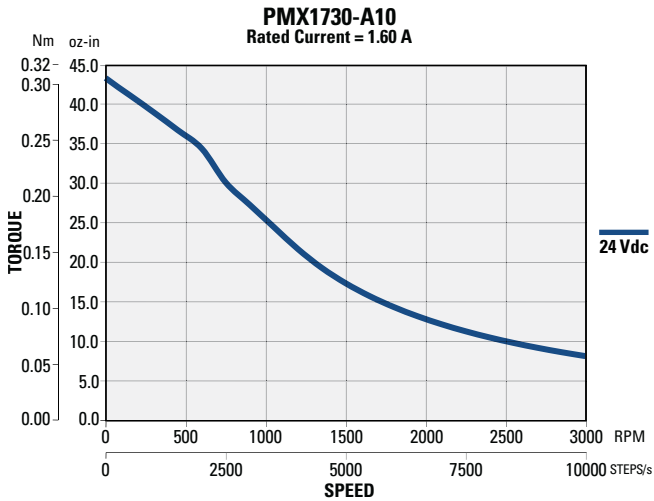


PMX17 Series (Bipolar - 1.8° Step) Performance Curves

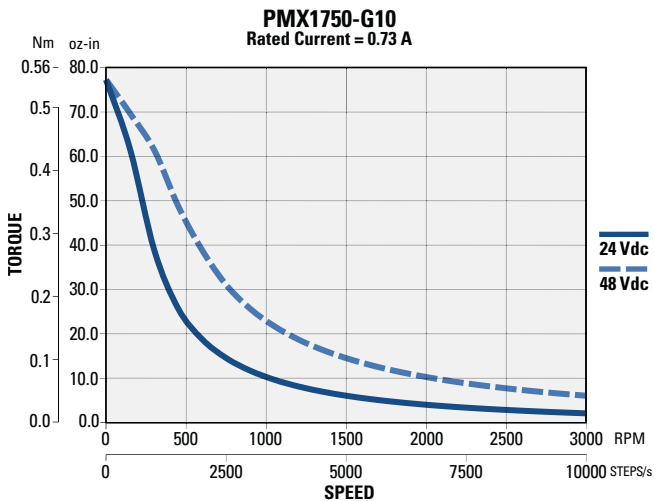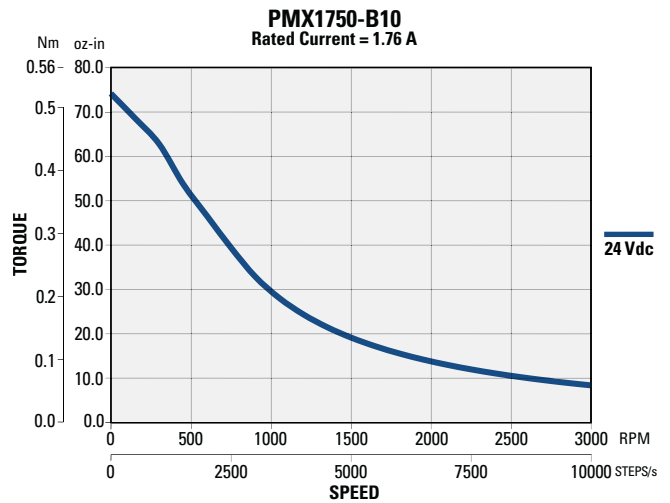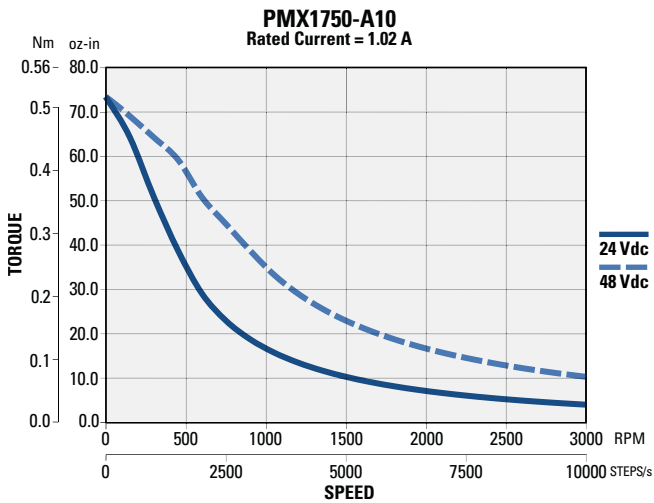
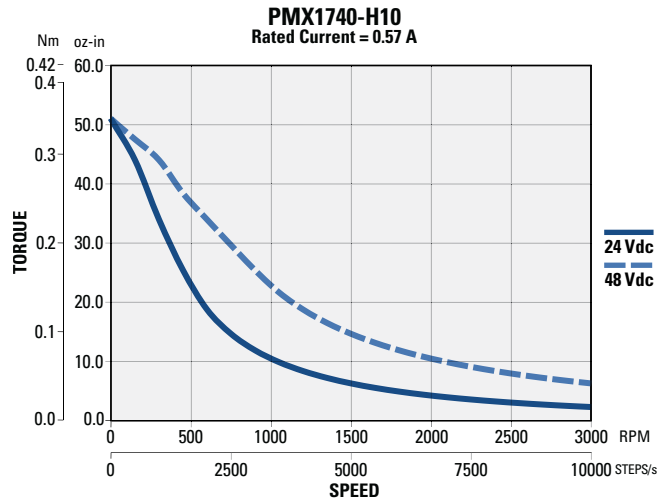
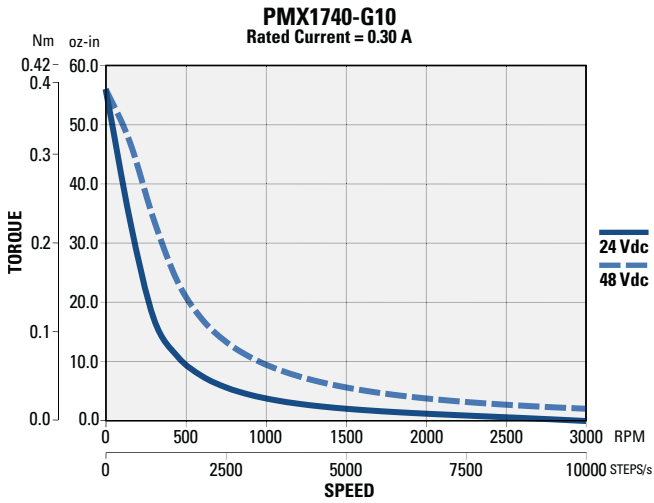


PMX17 Series Stepper Motors

PMX17 Series (Bipolar - 0.9° Step) Performance Curves

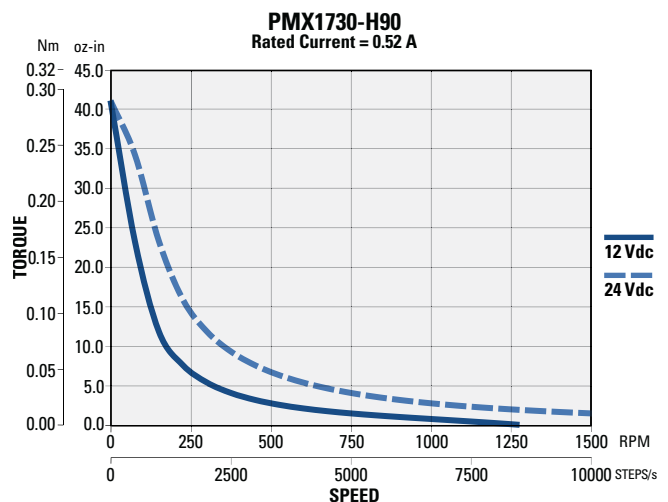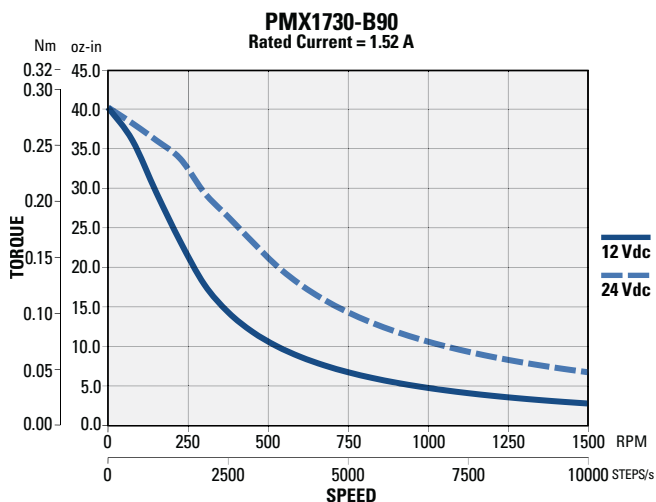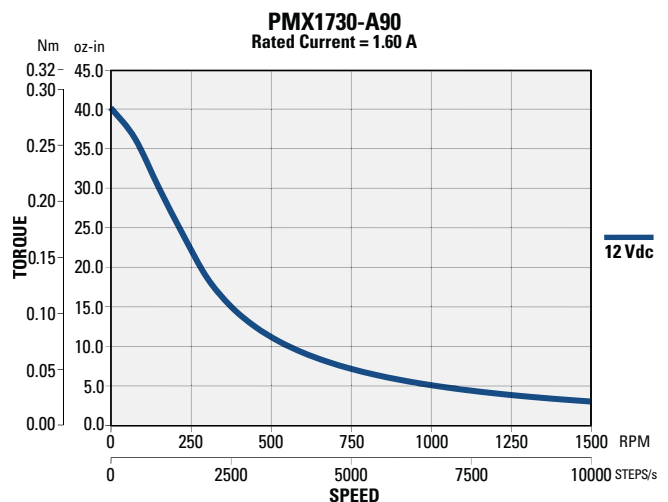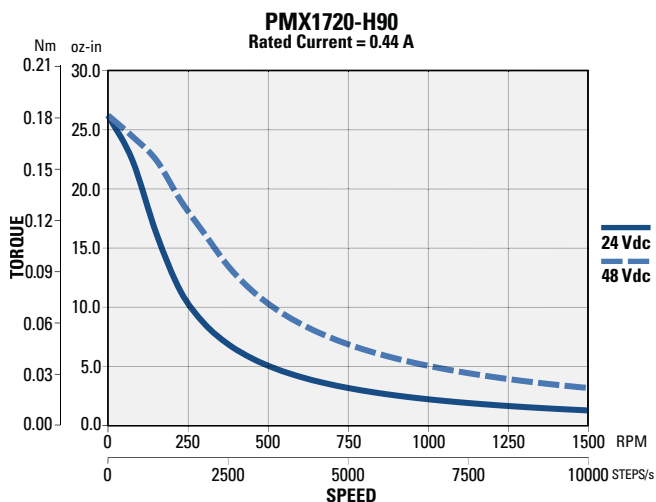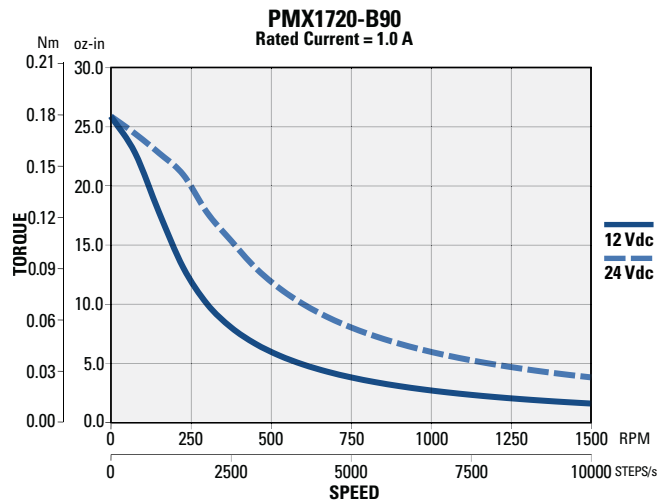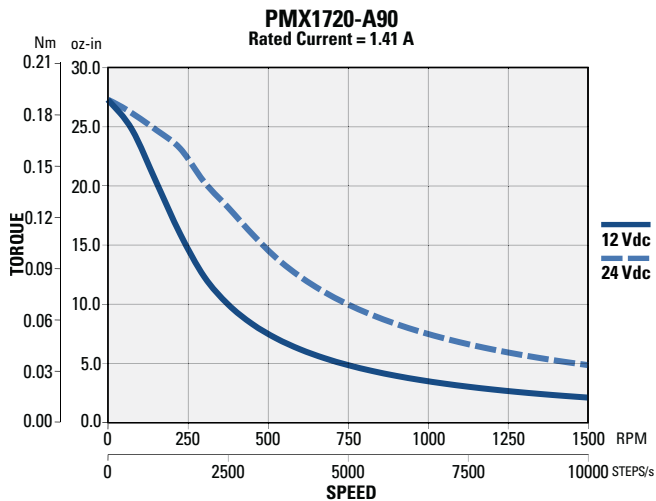


PMX17 Series (Bipolar - 0.9° Step) Performance Curves

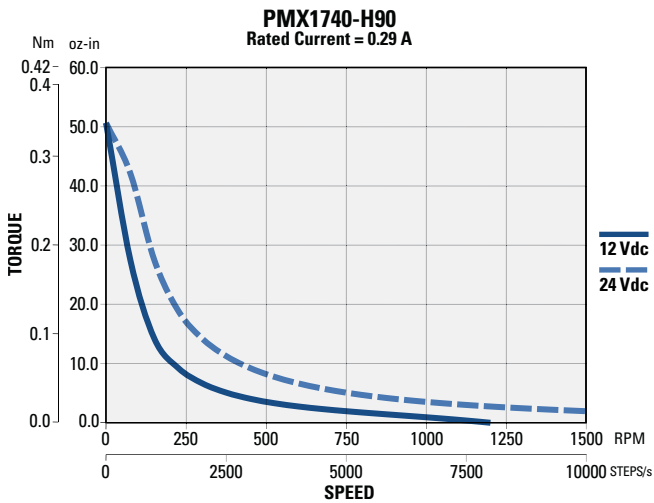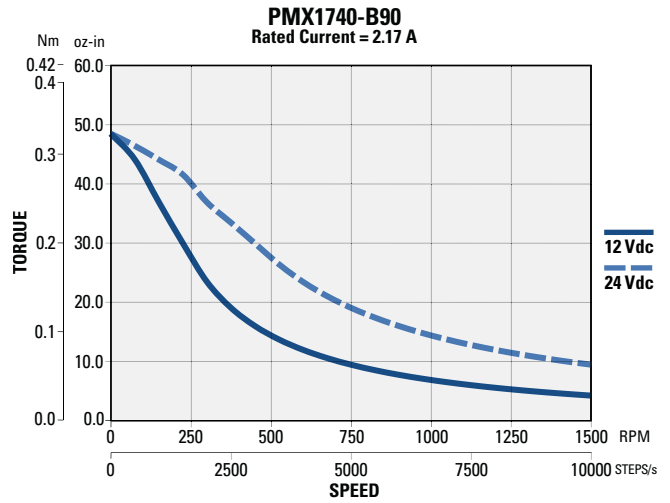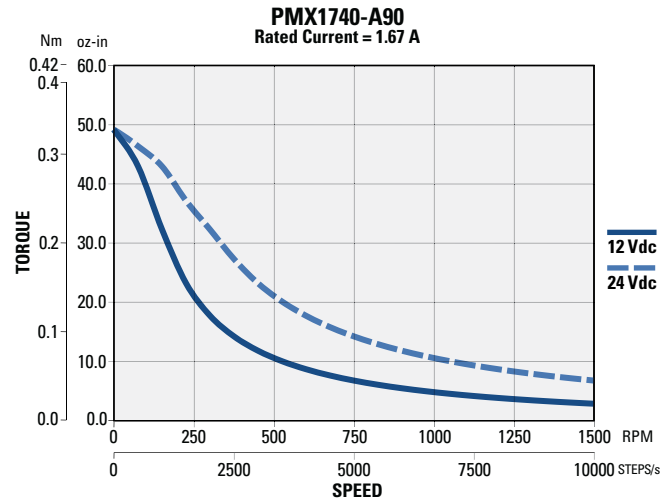

PMX23 SERIES STEPPER MOTORS

- NEMA Size 23
- Front shaft flat option
- Rear shaft option
- Integral connector option
- Rear encoder mounting holes
- Bipolar and Unipolar windings


Phases	2
Full Steps Per Revolution	200
Step Size Angle	1.8°, 0.9°
Step Angle Accuracy %	+/- 5.0
Maximum Case Temperature	130° C
Insulation Class	NEMA Class B, 130 °C
Insulation Resistance	100 Megaohms @ 500 Vdc
Ambient Temperature	-20.0 to + 40.0 °C
Dielectric Strength	500 Vac, 1 minute
Certifications:	CE, RoHS, REACH compliant

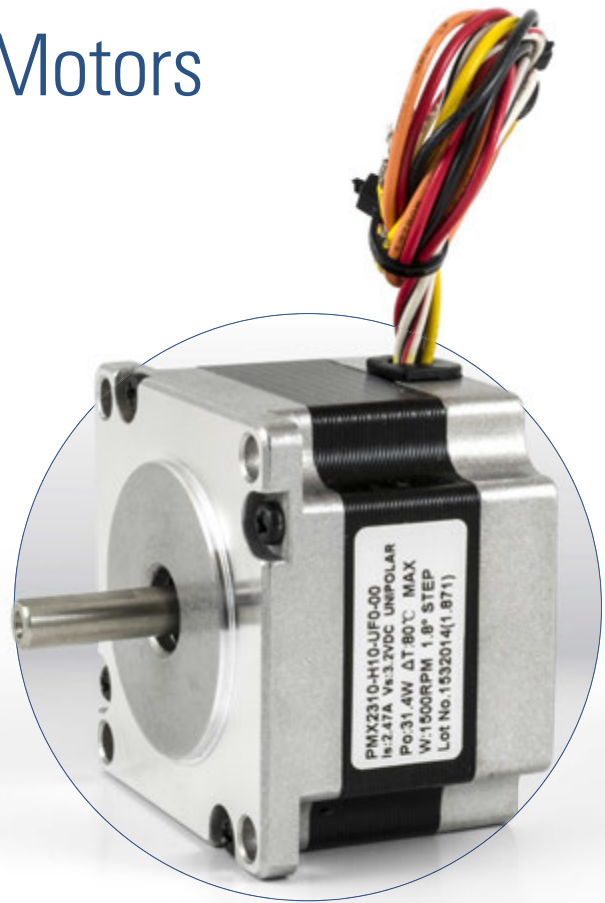


56.4 ± 1.0
[2.22 ± .03]

47.14 ± 0.20
[1.856 ± .007]



4X Ø 5.0 [20] THRU.

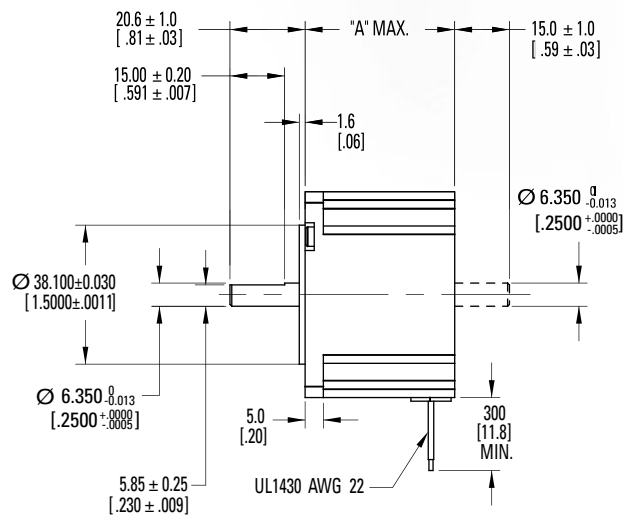

Encoder Mounting Hole Option



Model	"A" MAX
PMX231	41 [1.61]
PMX232	56 [2.20]
PMX233	76 [2.99]
PMX234	85 [3.35]

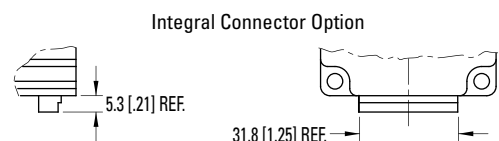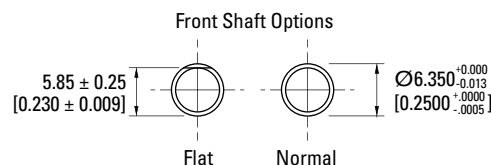

A 4-lead Bipolar, 12 inch (300 mm) mating cable assembly is included for all motors ordered with Integral Connector option.

Dimensions in mm [inches]

PMX23 (1.8° Step) Performance Data

PMX23			Configuration		Holding Torque (2 phases on)	Rated Current/ Phase	Phase Resistance	Phase Inductance	Thermal Resistance	Rotor Inertia	Weight	Shaft Loading	
Stack	Winding	Step	Bipolar	Unipolar	oz-in [Nm] +/-12%	Amps DC	Ohms +/-10%	mH Typical	Mounted °C/Watt	oz-in-s ² [kg-m ²]	lb [kg]	Radial Force	Axial Force
												lb [N]	lb [N]
1	A	1	•		100.7 [0.711]	3.50	0.68	1.33	4.69	1.70E-03 [1.20E-05]	1.0 [0.45]	16.88 [75.0]	3.38 [15.0]
1	B	1	•		98.9 [0.698]	0.48	34.78	59.94					
1	C	1	•		95.8 [0.676]	1.27	4.94	8.93					
1	G	1	•		100.4 [0.709]	0.87	10.48	21.33					
1	G	1		•	71.0 [0.501]	1.23	5.23	5.33					
1	H	1	•		100.7 [0.711]	1.75	2.62	5.33					
1	H	1		•	71.2 [0.503]	2.47	1.31	1.33					
1	J	1	•		102.3 [0.722]	2.53	1.27	2.66					
1	J	1		•	72.3 [0.511]	3.58	0.63	0.67	3.11	4.26E-03 [3.01E-05]	1.5 [0.70]	16.88 [75.0]	3.38 [15.0]
2	A	1	•		205.2 [1.449]	3.45	0.83	2.63					
2	B	1	•		196.5 [1.388]	0.56	30.23	88.58					
2	C	1	•		198.9 [1.405]	1.24	6.20	18.73					
2	G	1	•		199.9 [1.412]	0.84	13.25	40.74					
2	G	1		•	141.4 [0.999]	1.19	6.62	10.19					
2	H	1	•		208.4 [1.472]	1.76	3.06	10.53					
2	H	1		•	147.4 [1.041]	2.49	1.52	2.63					
2	J	1	•		204.3 [1.443]	2.57	1.46	4.68					
2	J	1		•	144.5 [1.020]	3.63	0.72	1.17					

Notes:

1. All ratings typical and at 40° C unless otherwise noted.
2. Rated current is T = 80° C, ON-PLATE; motor mounted to square aluminum plate heatsink, 2.5X motor diameter, 5mm thick.
3. Small signal inductance as measured with impedance bridge @ 1 KHz, 1 amp.

Continued on the following page

*Complete PMX series model nomenclature can be found on page 43.

PMX23 Series Stepper Motors

PMX23 (1.8° Step) Performance Data (continued)

PMX23			Configuration		Holding Torque (2 phases on)	Rated Current/ Phase	Phase Resistance	Phase Inductance	Thermal Resistance	Rotor Inertia	Weight	Shaft Loading	
Stack	Winding	Step	Bipolar	Unipolar	oz-in [Nm] +/-12%	Amps DC	Ohms +/-10%	mH Typical	Mounted °C/Watt	oz-in-s ² [kg-m ²]	lb [kg]	Radial Force	Axial Force
3	A	1	•		326.4 [2.305]	3.23	1.14	3.75	2.70	6.82E-03 [4.82E-05]	2.2 [1.00]	16.88 [75.0]	3.38 [15.0]
3	B	1	•		336.8 [2.378]	3.96	0.73	2.57					
3	G	1	•		320.2 [2.261]	0.80	16.81	53.95					
3	G	1		•	226.6 [1.600]	1.14	8.39	13.47					
3	H	1	•		326.4 [2.305]	1.57	4.45	15.00					
3	H	1		•	230.8 [1.630]	2.21	2.22	3.75					
3	J	1	•		327.4 [2.312]	2.40	1.92	6.44					
3	J	1		•	231.5 [1.635]	3.40	0.95	1.61	2.52	7.38E-03 [5.21E-05]	2.6 [1.20]	16.88 [75.0]	3.38 [15.0]
4	A	1	•		378.4 [2.672]	3.83	0.81	3.23					
4	B	1	•		347.5 [2.454]	0.75	20.81	67.27					
4	C	1	•		349.3 [2.467]	1.16	8.66	28.34					
4	D	1	•		354.0 [2.500]	0.99	11.82	40.08					

Notes:

1. All ratings typical and at 40° C unless otherwise noted.
2. Rated current is T = 80° C, ON-PLATE; motor mounted to square aluminum plate heatsink, 2.5X motor diameter, 5mm thick.
3. Small signal inductance as measured with impedance bridge @ 1 KHz, 1 amp.
4. Complete PMX series model nomenclature can be found on page 52.

PMX23 (0.9° Step) Performance Data

PMX23			Configuration		Holding Torque (2 phases on)	Rated Current/ Phase	Phase Resistance	Phase Inductance	Thermal Resistance	Rotor Inertia	Weight	Shaft Loading	
Stack	Winding	Step	Bipolar	Unipolar	oz-in [Nm] +/-12%	Amps DC	Ohms +/-10%	mH Typical	Mounted °C/Watt	oz-in-s ² [kg-m ²]	lb [kg]	Radial Force	Axial Force
												lb [N]	lb [N]
1	A	9	•		97.6 [0.689]	3.37	0.74	2.66	4.69	1.70E-03 [1.20E-05]	1.0 [0.45]	16.88 [75.0]	3.38 [15.0]
1	B	9	•		92.5 [0.653]	0.47	35.54	106.70					
1	C	9	•		93.7 [0.662]	1.26	5.05	15.89					
1	G	9	•		97.4 [0.688]	0.86	10.66	37.95					
1	G	9		•	68.1 [0.481]	1.22	5.22	9.48					
2	A	9	•		203.8 [1.439]	3.24	0.93	5.15	3.11	4.26E-03 [3.01E-05]	1.5 [0.70]	16.88 [75.0]	3.38 [15.0]
2	B	9	•		195.1 [1.378]	0.56	29.59	124.49					
2	C	9	•		196.9 [1.390]	1.25	6.07	26.32					
2	G	9	•		204.8 [1.446]	0.80	14.94	87.46					
2	G	9		•	146.8 [1.037]	1.16	7.47	21.87					
3	A	9	•		313.0 [2.210]	3.26	1.06	6.67	2.70	6.82E-03 [4.82E+05]	2.2 [1.00]	16.88 [75.0]	3.38 [15.0]
3	B	9	•		304.5 [2.150]	4.14	0.67	3.75					
3	G	9	•		305.4 [2.157]	0.78	17.85	106.72					
3	G	9		•	216.0 [1.525]	1.10	8.92	26.68					







Notes:

1. All ratings typical and at 40° C unless otherwise noted.
2. Rated current is T = 80° C, ON-PLATE; motor mounted to square aluminum plate heatsink, 2.5X motor diameter, 5mm thick.
3. Small signal inductance as measured with impedance bridge @ 1 KHz, 1 amp.







*Complete PMX series model nomenclature can be found on page 43.

PMX23 Series Stepper Motors

PMX23 Series (Bipolar - 1.8° Step) Performance Curves

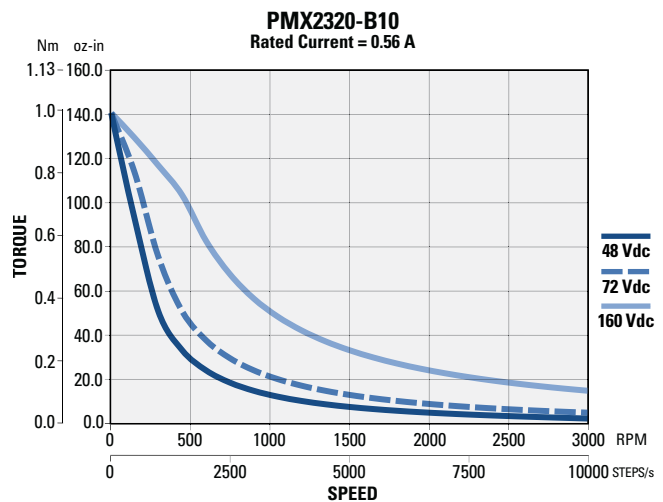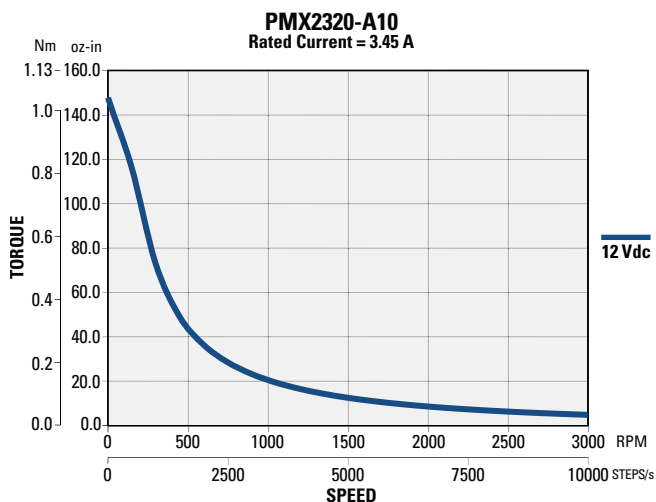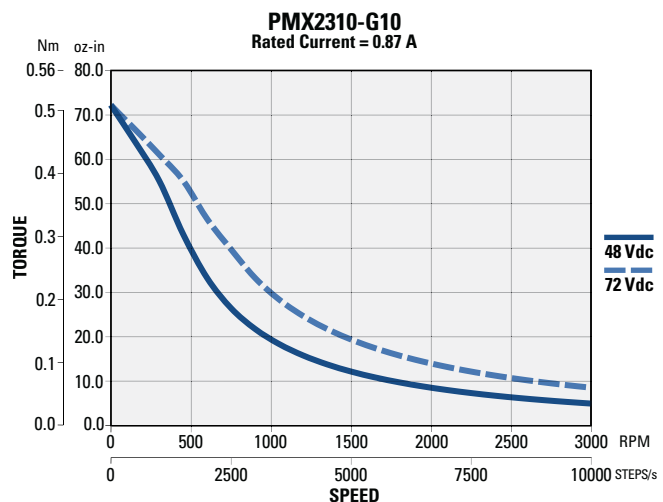
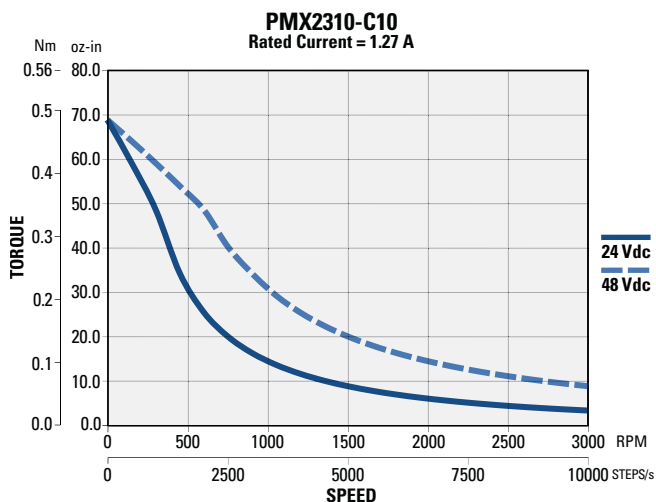
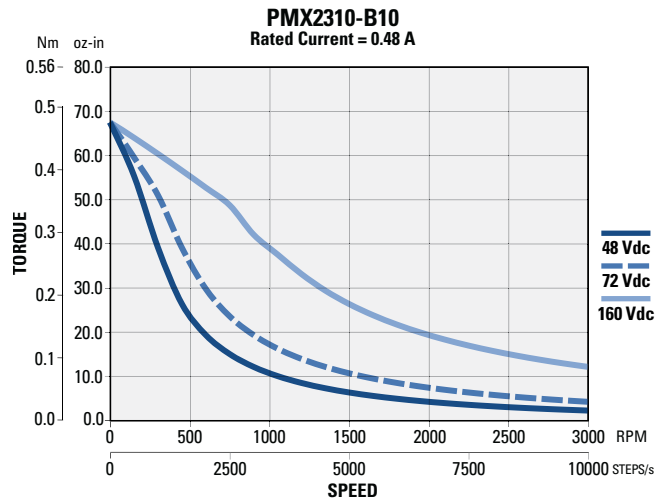
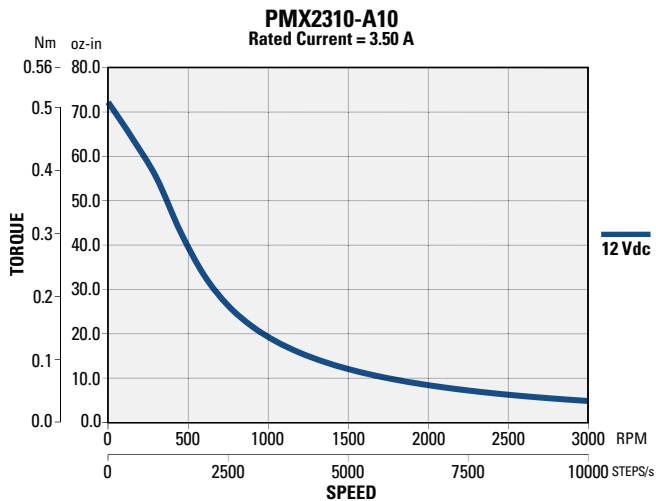


PMX23 Series (Bipolar - 1.8° Step) Performance Curves

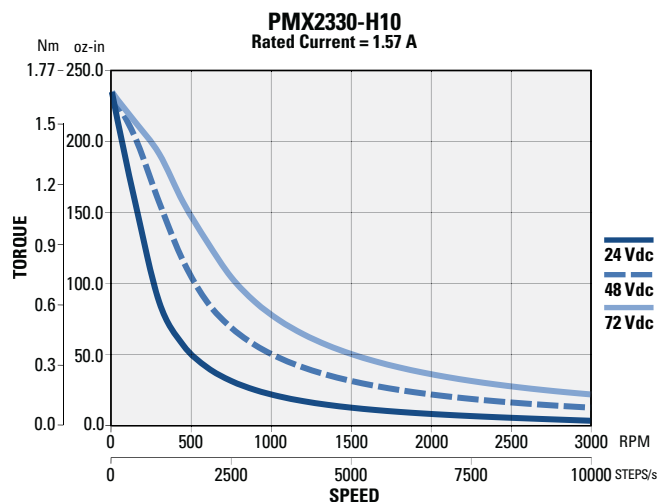
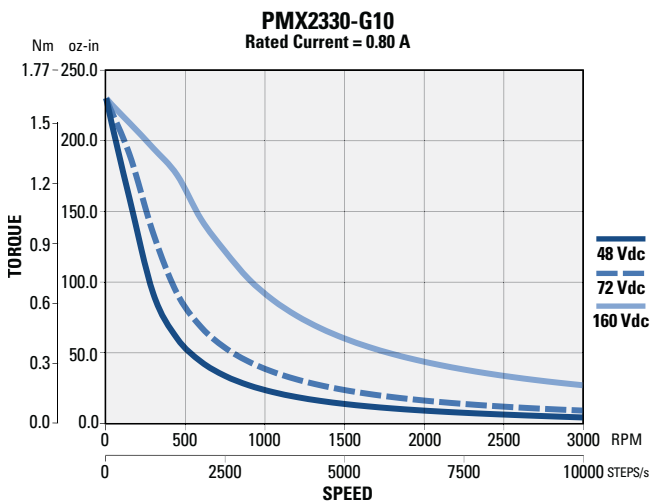
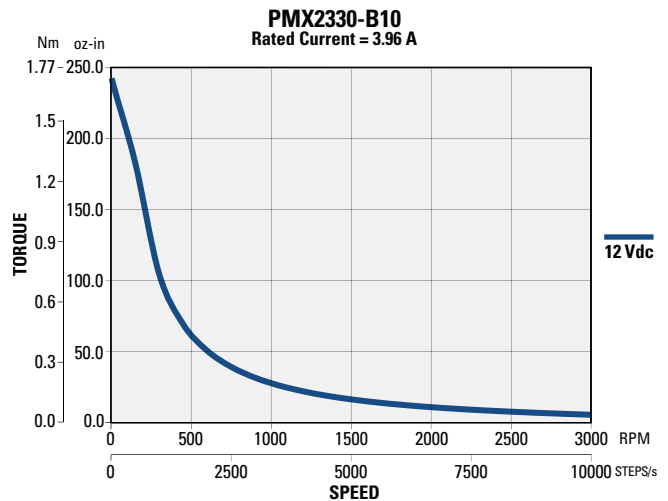
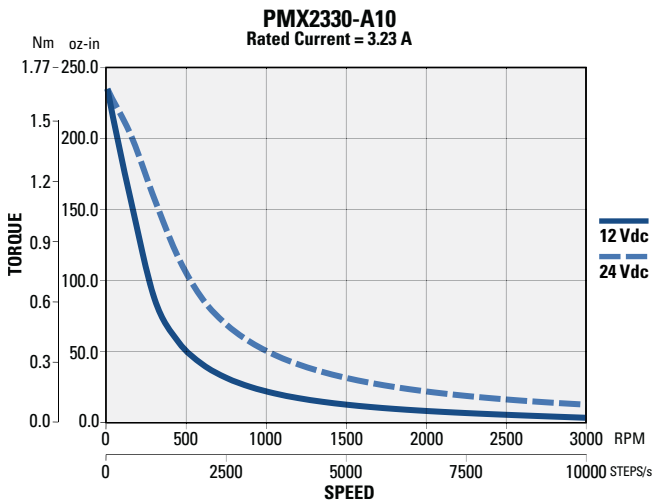
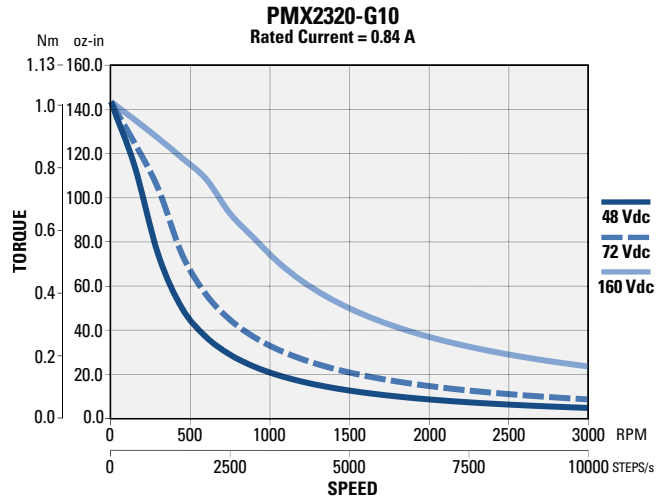
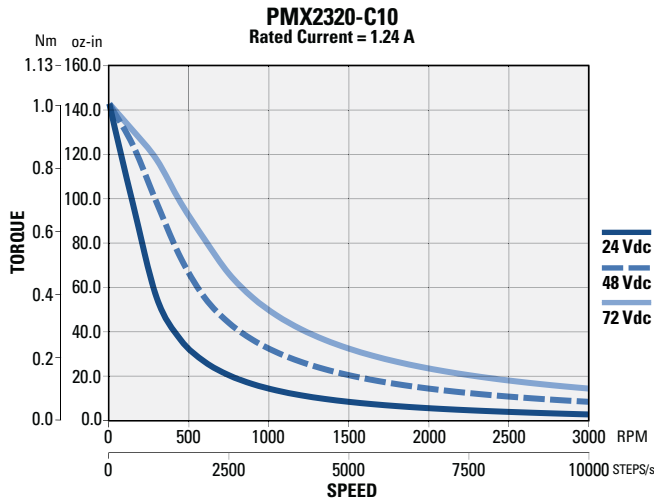


PMX23 Series Stepper Motors

PMX23 Series (Bipolar - 1.8° Step) Performance Curves


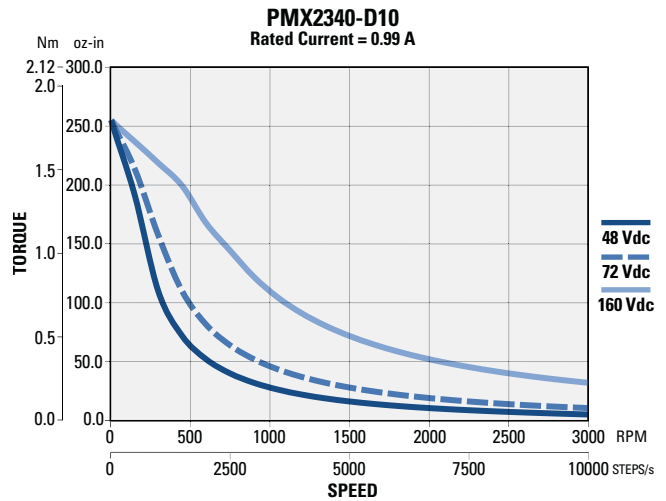
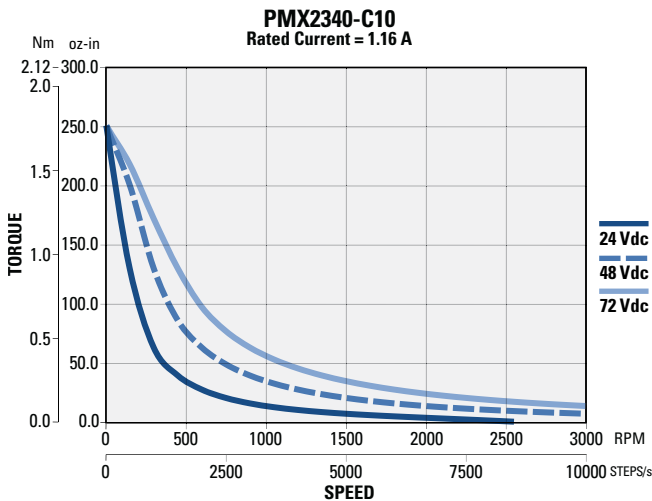
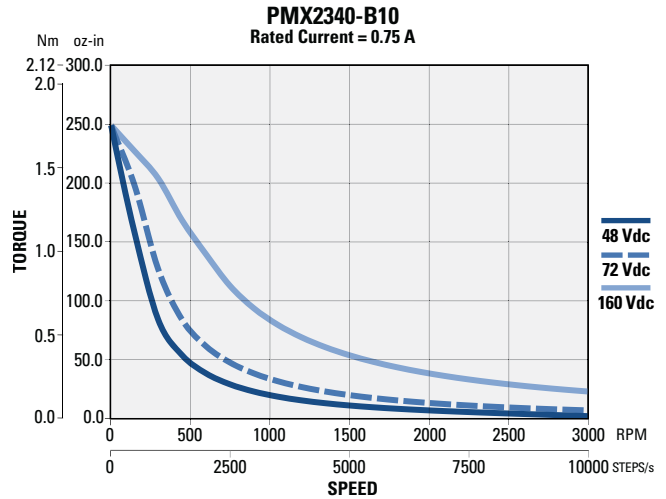
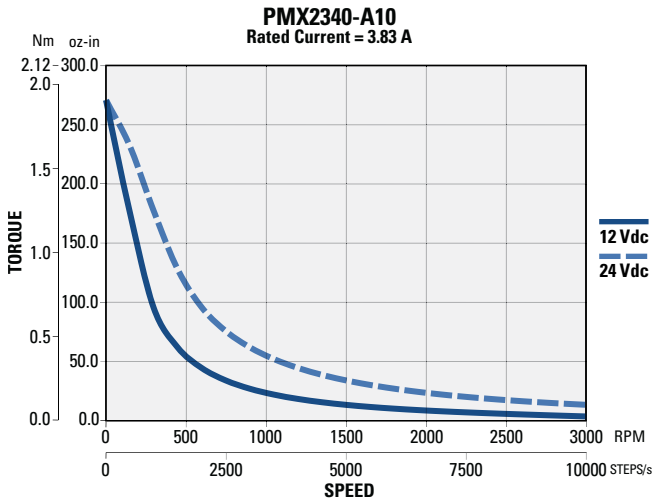


PMX23 Series (Bipolar - 0.9° Step) Performance Curves

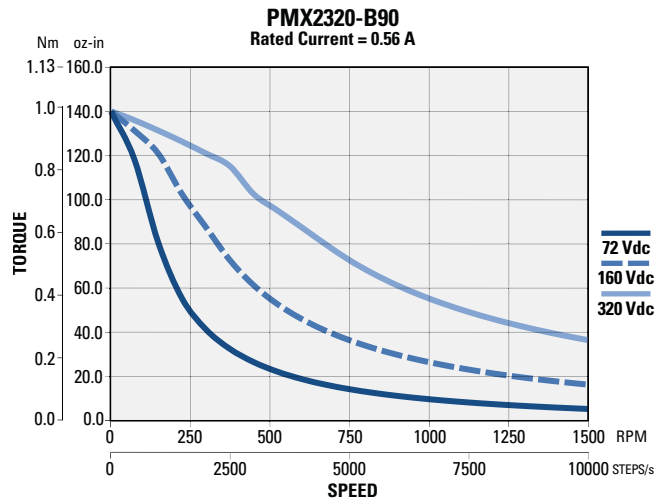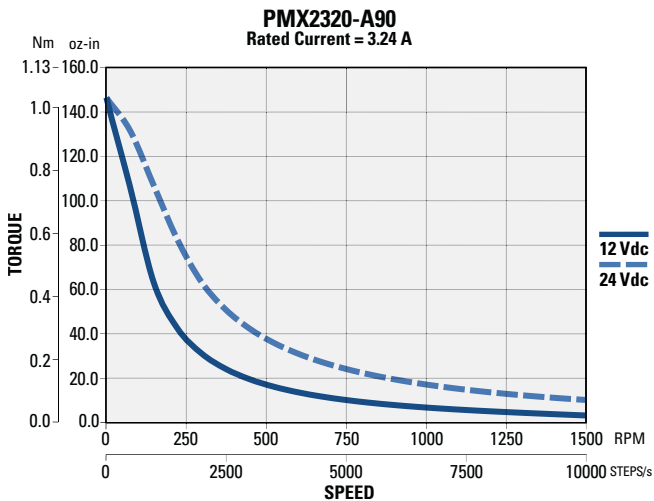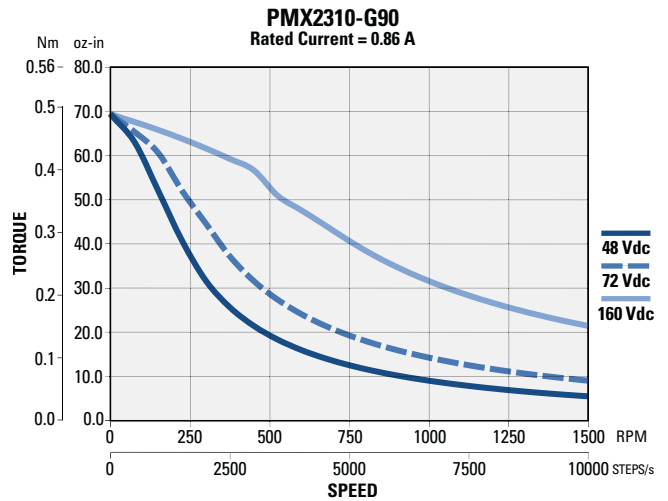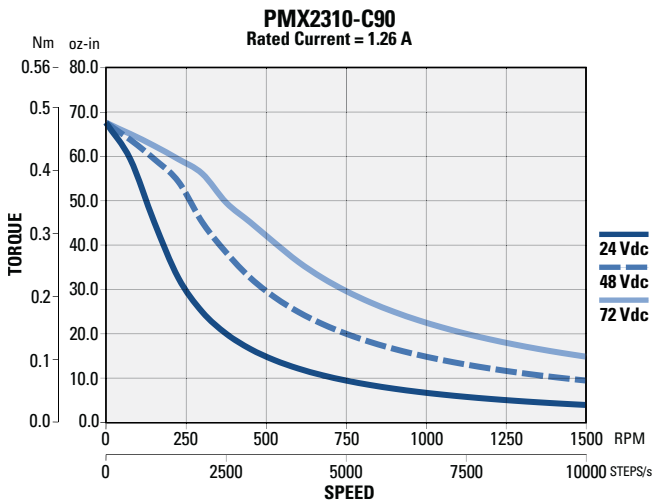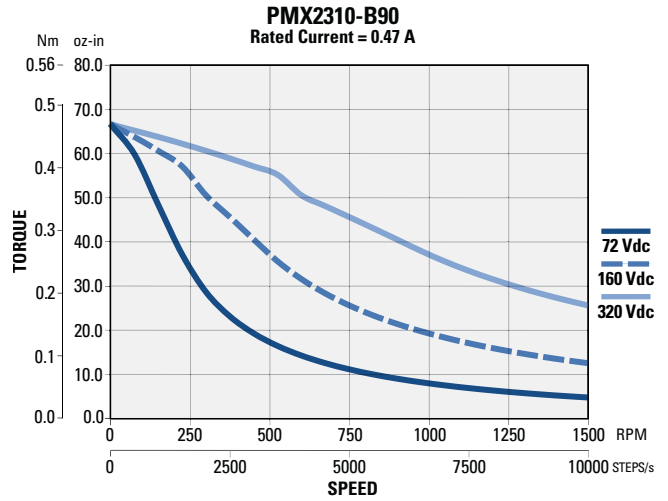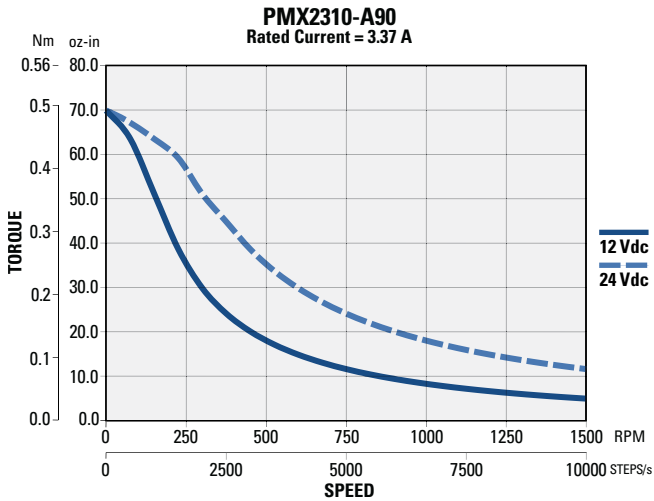


PMX23 Series Stepper Motors

PMX23 Series (Bipolar - 0.9° Step) Performance Curves

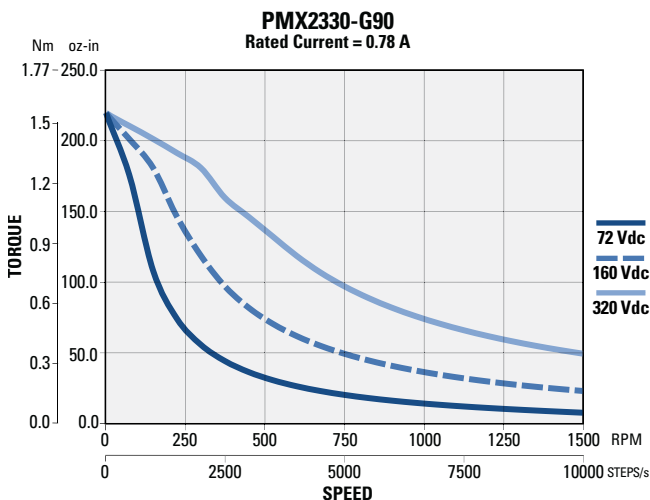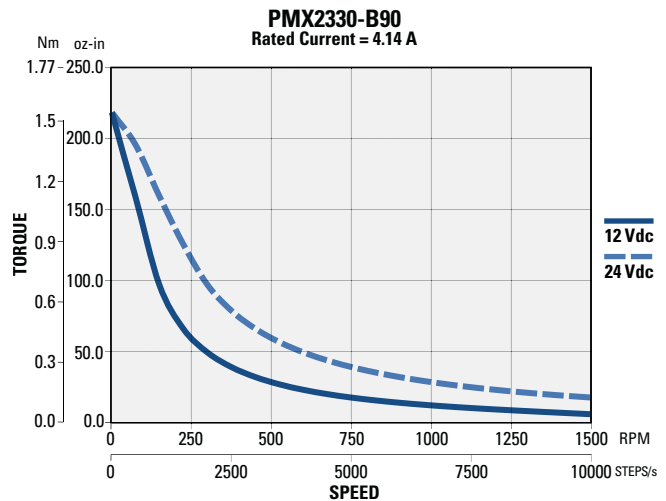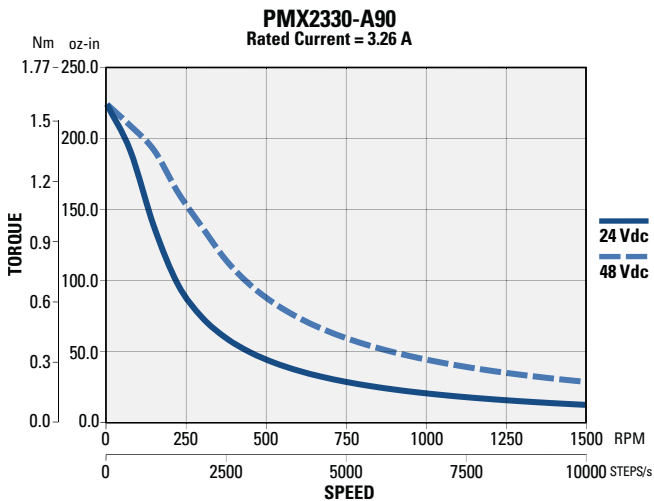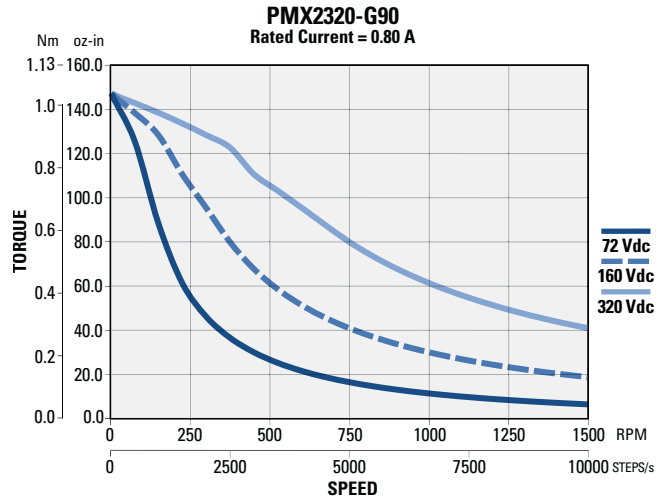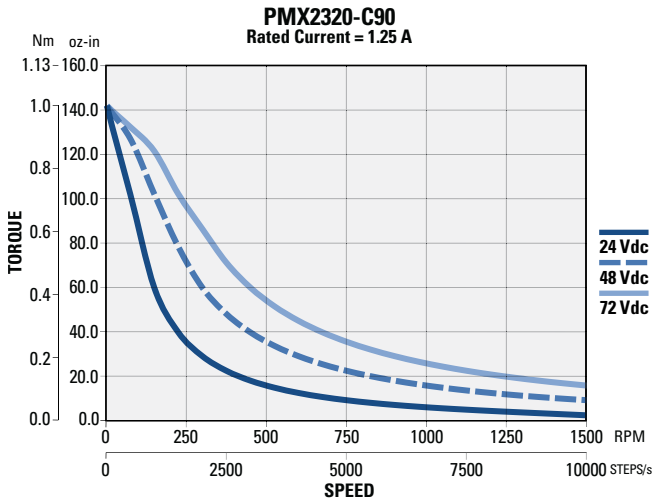

Notes

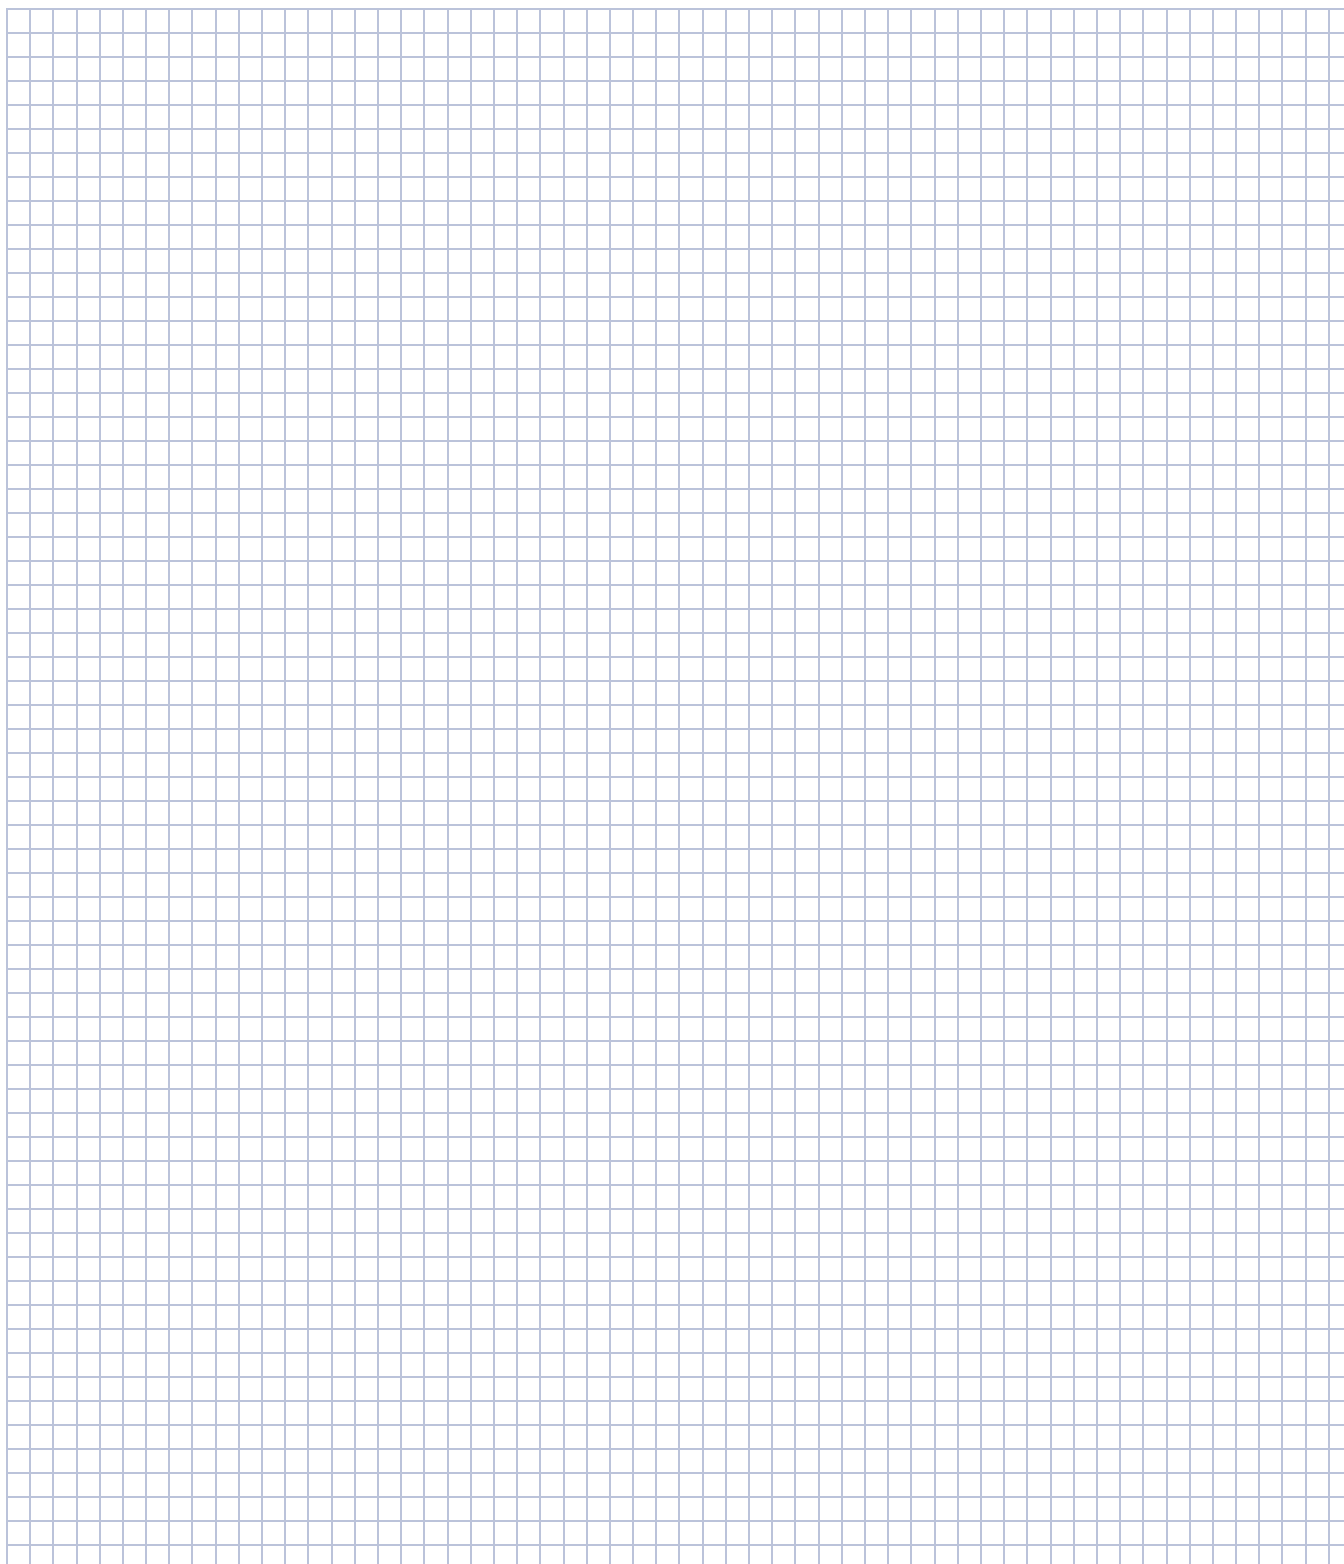


PMX34 Series Stepper Motors


PMX34 Standard Options and Specifications

- NEMA Size 34
- Front shaft flat option
- Rear shaft option
- Bipolar windings


Phases	2
Full Steps Per Revolution	200
Step Size Angle	1.8°
Step Angle Accuracy %	+/- 5.0
Maximum Case Temperature	130 °C
Insulation Class	NEMA Class B, 130 °C
Insulation Resistance	100 Megohms @ 500 Vdc
Ambient Temperature	-20.0 to + 40.0 °C
Dielectric Strength	500 Vac, 1 minute
Certifications:	CE, RoHS, REACH compliant

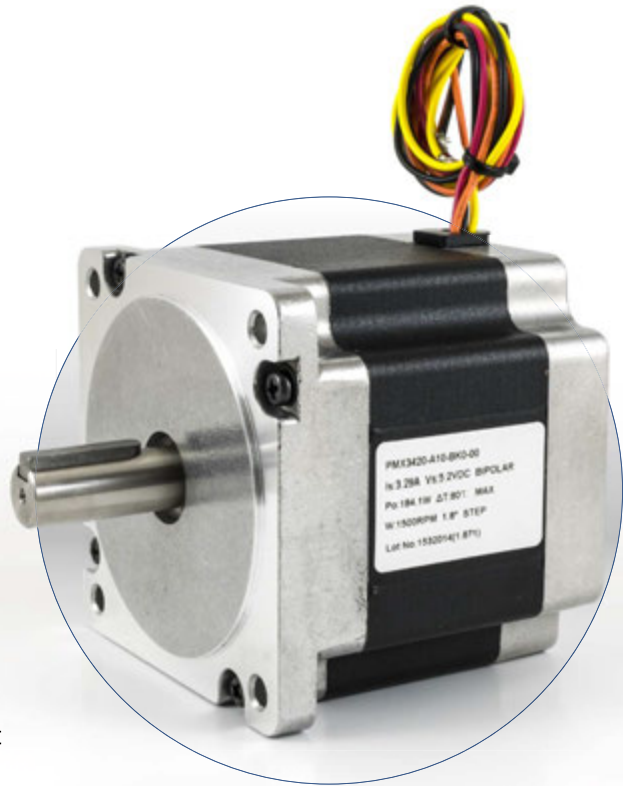

PMX34 Dimensions

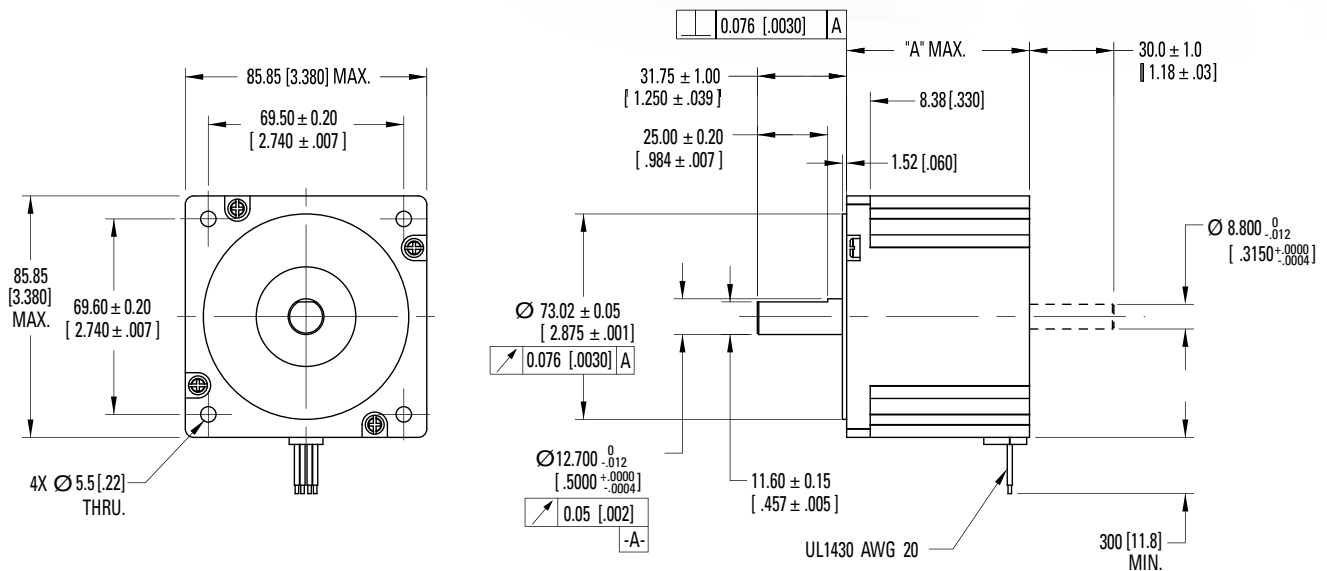

Model	"A" MAX
PMX341	65 [2.56]
PMX342	80 [3.15]
PMX343	118 [4.65]
PMX344	156 [6.14]

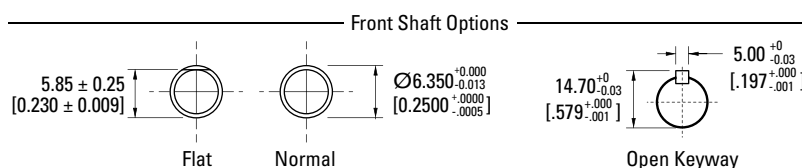

Dimensions in mm [inches]

PMX34 (1.8° Step) Performance Data

PMX34			Configuration		Holding Torque (2 phases on)	Rated Current/ Phase	Phase Resistance	Phase Inductance	Thermal Resistance	Rotor Inertia	Weight	Shaft Loading	
Stack	Winding	Step	Bipolar	Unipolar	oz-in [Nm] +/-12%	Amps DC	Ohms +/-10%	mH Typical	Mounted °C/Watt	oz-in-s ² [kg-m ²]	lb [kg]	Radial Force	Axial Force
												lb [N]	lb [N]
1	A	1	•		486.1 [3.433]	3.61	1.15	6.46	1.98	1.42E-02 [1.00E-04]	3.7 [1.70]	49.46 [220]	13.49 [60]
1	B	1	•		486.1 [3.433]	7.22	0.31	1.62					
1	C	1	•		483.1 [3.411]	1.01	14.65	81.70					
1	D	1	•		489.5 [3.457]	2.59	2.21	12.81					
2	A	1	•		695.8 [4.913]	3.26	1.51	12.71	1.83	1.99E-02 [1.41E-04]	5.1 [2.30]	49.46 [220]	13.49 [60]
2	B	1	•		703.5 [4.968]	6.40	0.41	3.41					
2	C	1	•		685.0 [4.837]	1.09	13.56	108.98					
2	D	1	•		698.9 [4.935]	2.87	1.95	16.60					
3	A	1	•		1238.5 [8.746]	3.04	2.34	22.20	1.35	3.83E-02 [2.70E-04]	8.4 [3.79]	49.46 [220]	13.49 [60]
3	B	1	•		1285.4 [9.077]	6.45	0.54	5.56					
3	C	1	•		1223.4 [8.639]	1.23	14.29	151.00					
3	D	1	•		1250.1 [8.828]	4.80	0.95	10.58					
4	A	1	•		1630.7 [11.515]	2.94	3.05	33.14	1.21	5.68E-02 [4.01E-04]	11.7 [5.29]	49.46 [220]	13.49 [60]
4	B	1	•		1739.2 [12.281]	6.00	0.75	8.94					
4	C	1	•		1659.0 [11.715]	1.42	12.93	148.28					
4	D	1	•		1689.0 [11.927]	4.46	1.33	15.88					







Notes:

1. All ratings typical and at 40° C unless otherwise noted.
2. Rated current is T = 80° C, ON-PLATE; motor mounted to square aluminum plate heatsink, 2.5X motor diameter, 5mm thick.
3. Small signal inductance as measured with impedance bridge @ 1 KHz, 1 amp.







*Complete PMX series model nomenclature can be found on page 43.

PMX34 Series Stepper Motors

PMX34 Series (Bipolar - 1.8° Step) Performance Curves

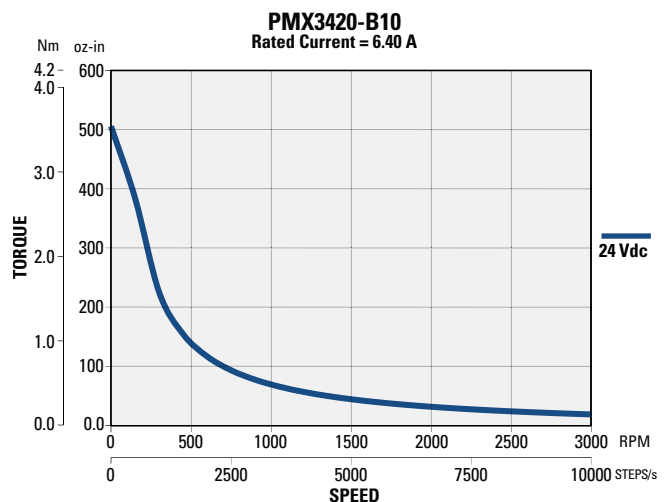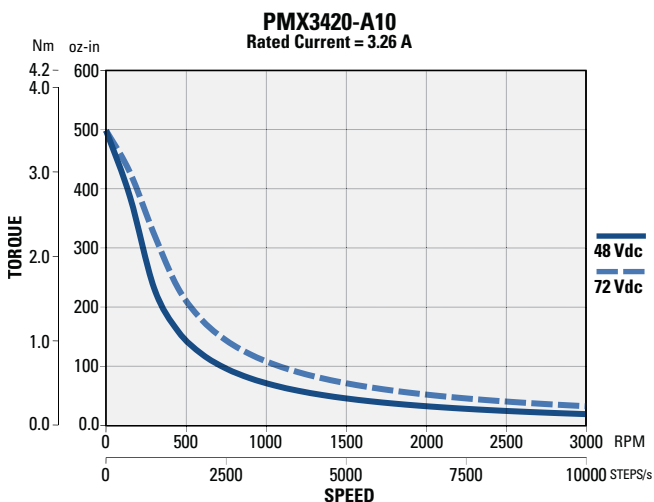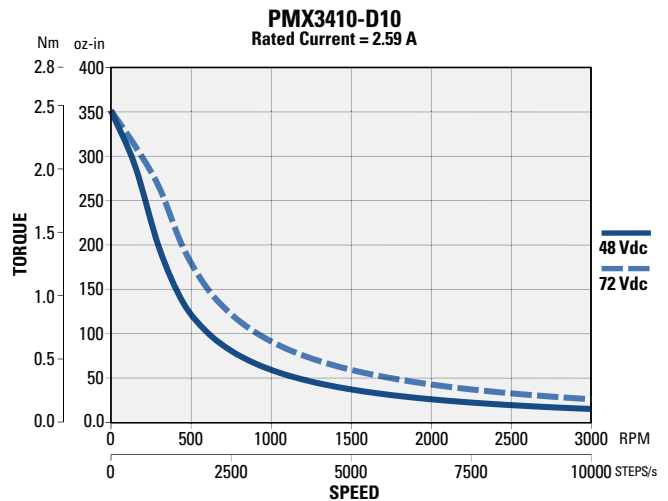
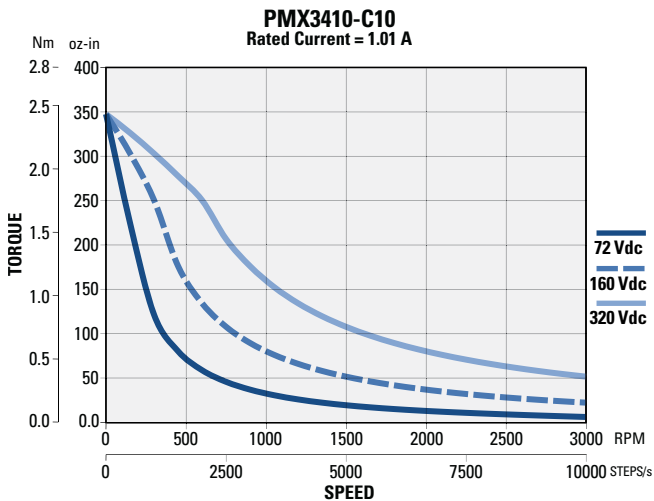
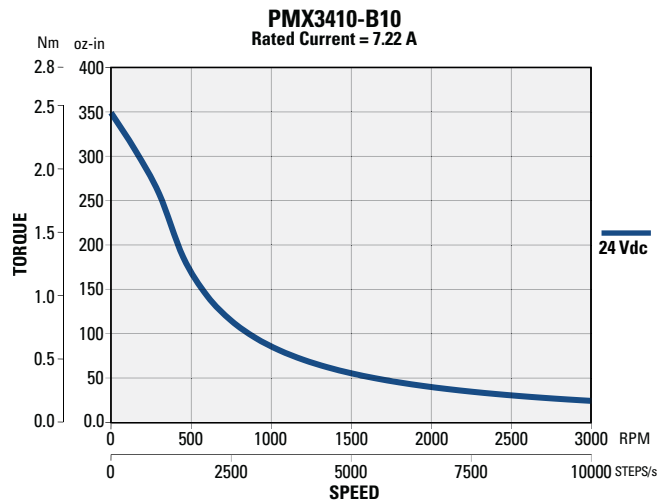
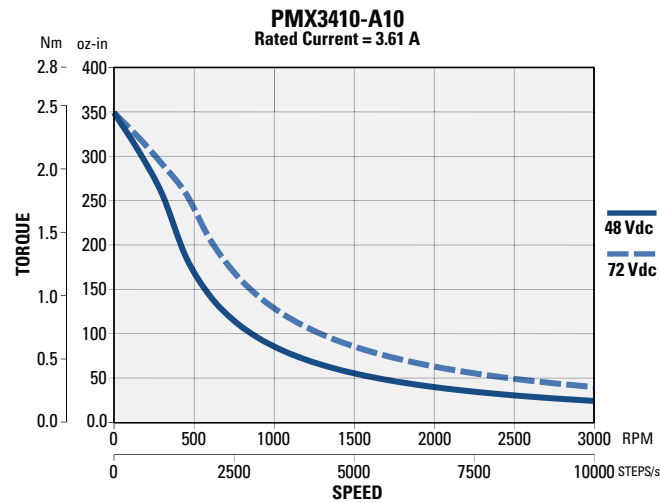


PMX34 Series (Bipolar - 1.8° Step) Performance Curves

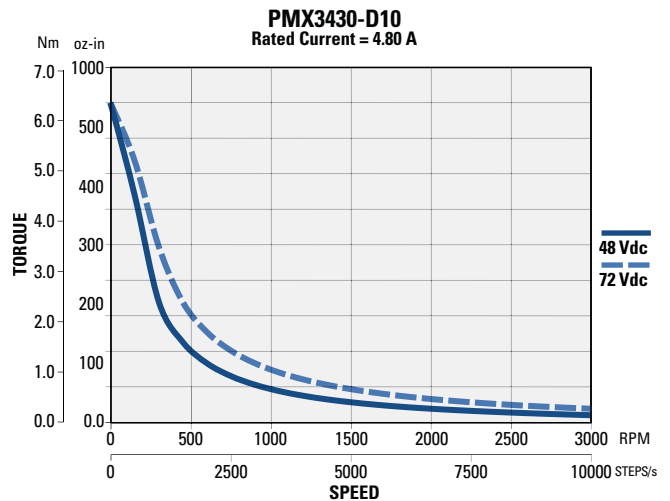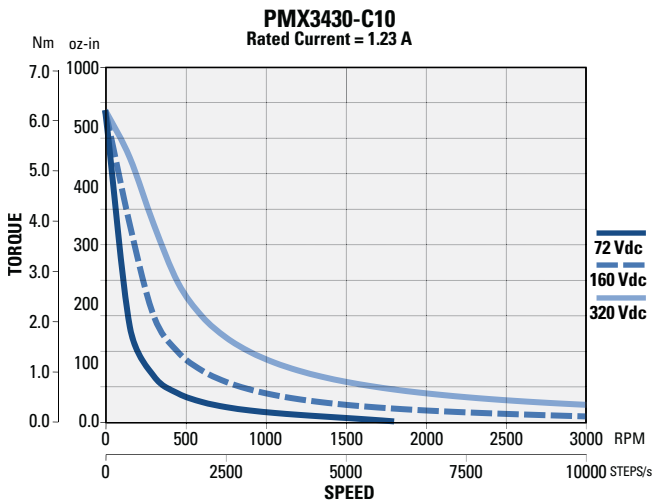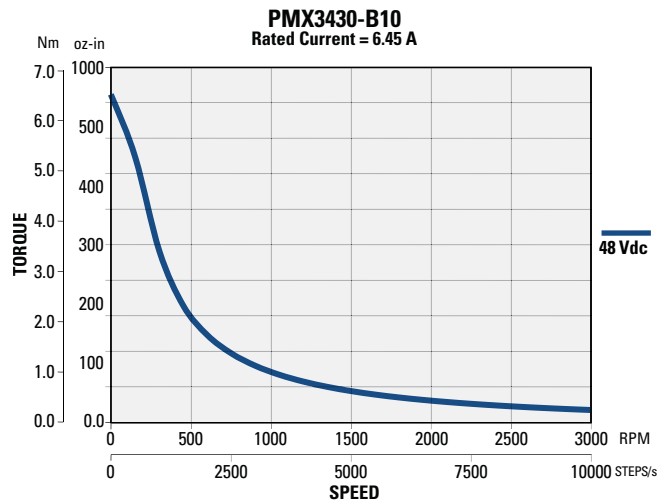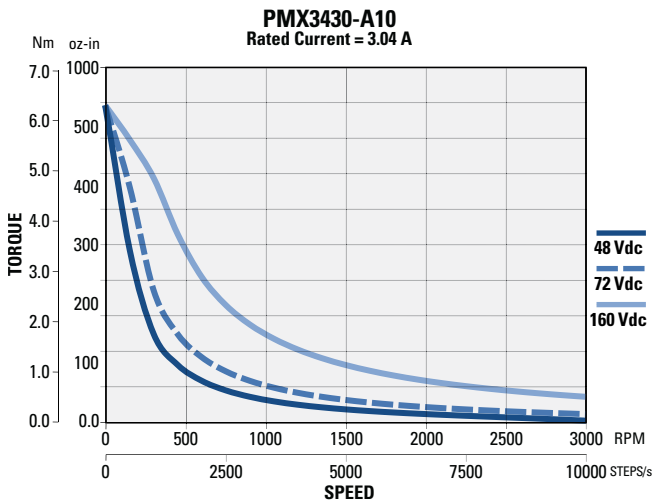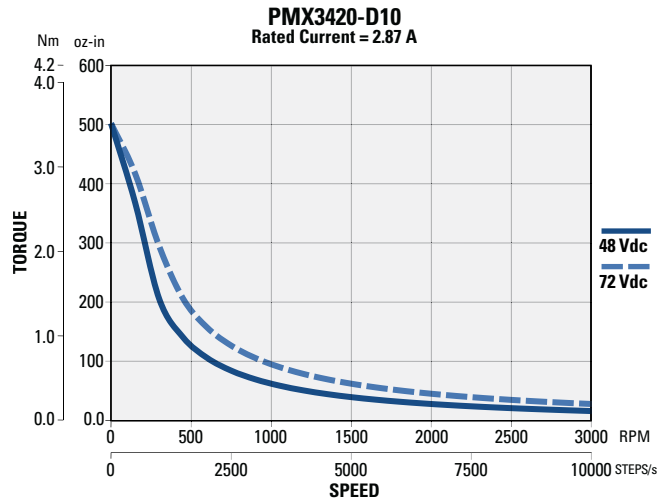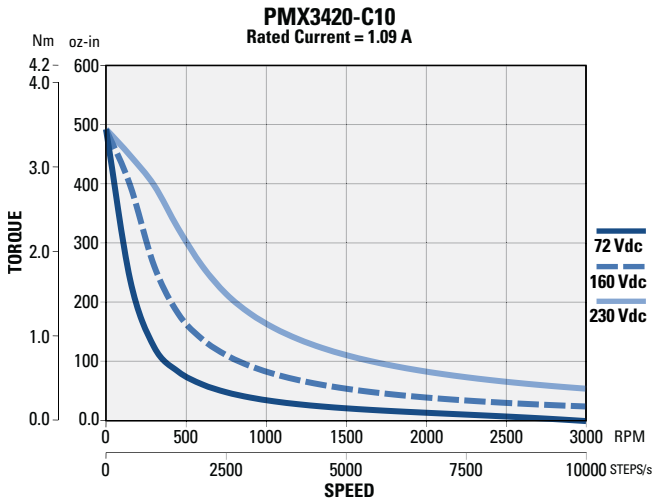


PMX34 Series Stepper Motors

PMX34 Series (Bipolar - 1.8° Step) Performance Curves

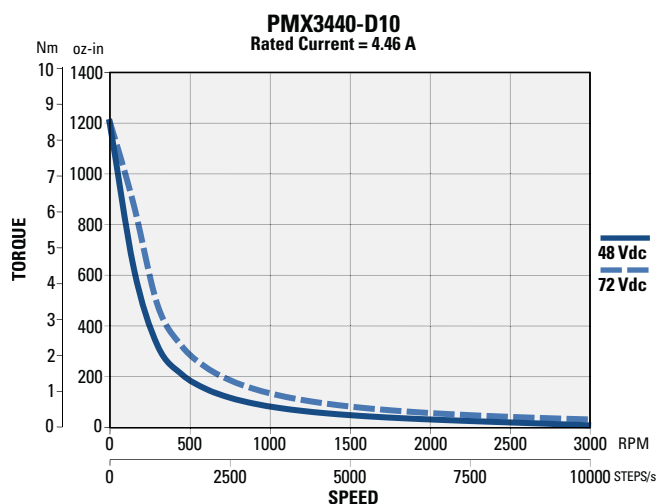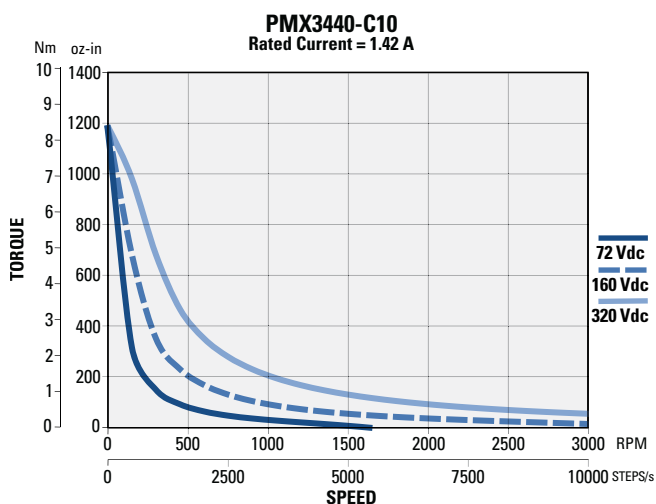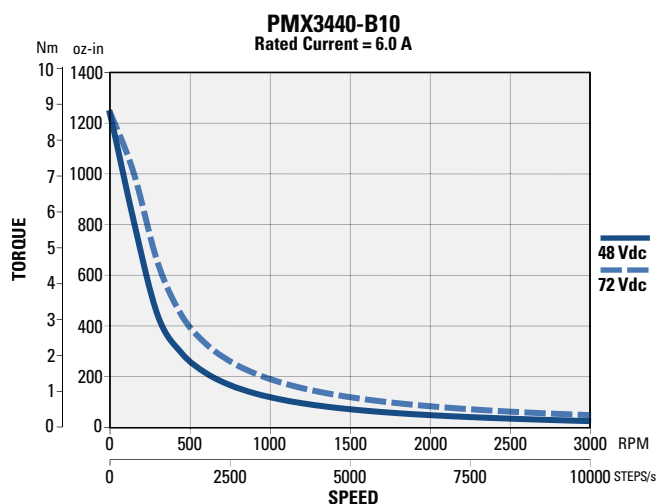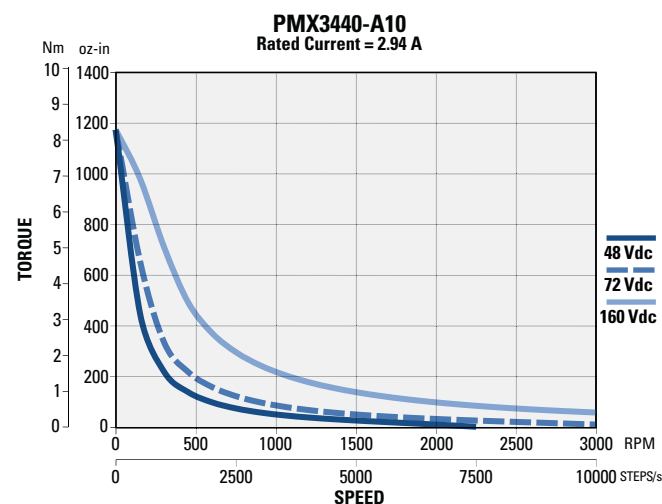

PMX™ Series Stepper Motor Nomenclature

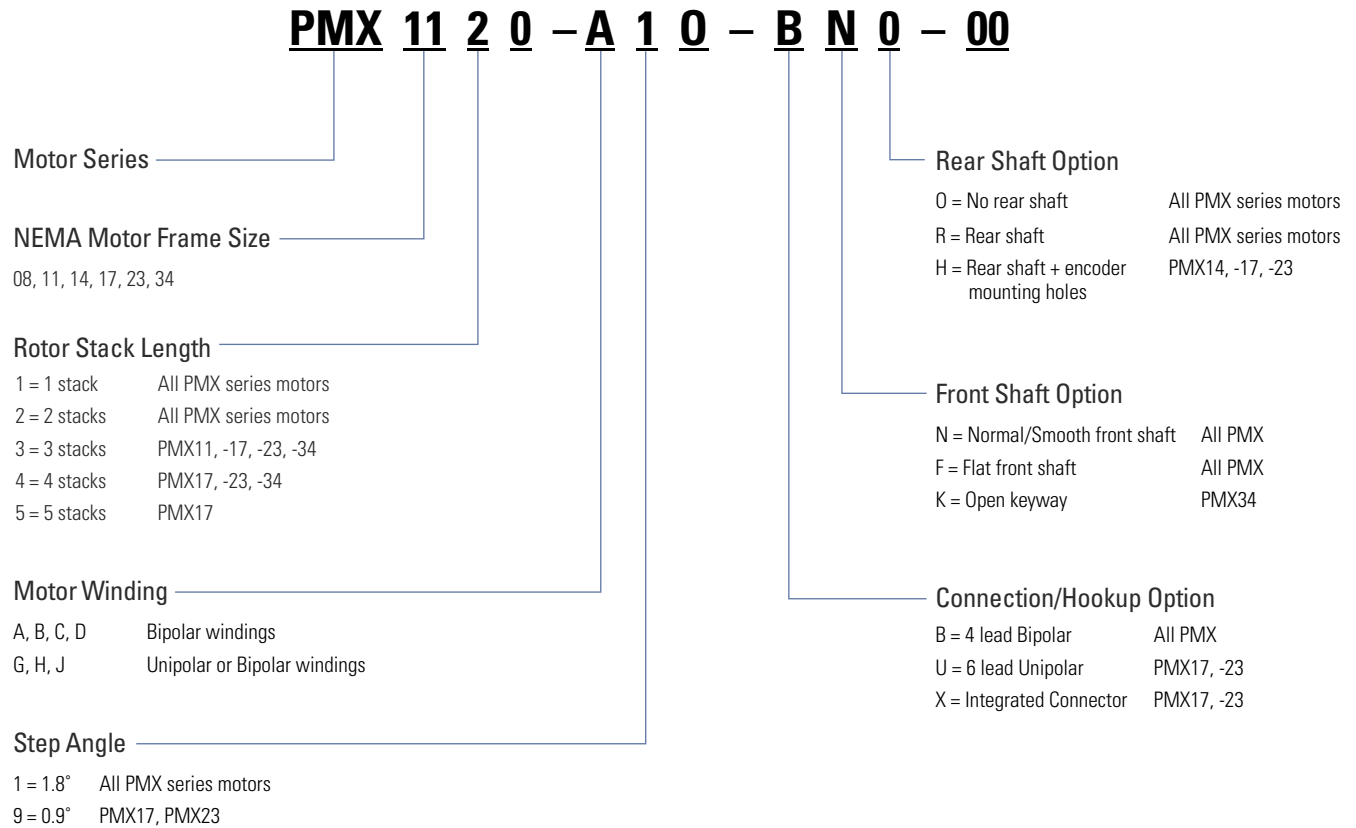

Stepper Motor General Technical Guide


Stepper Motor Basics

A Kollmorgen stepper motor is a brushless motor consisting of a rotor and a stator assembly. The illustration shows the internal construction and tooth alignment of the motor. The fine teeth, evenly spaced around the entire diameter, provide the incremental angular rotation that results in mechanical motion.

Kollmorgen Hybrid stepper motors have two windings (two phases) that are energized with DC current. When the current in one winding is reversed, the motor shaft moves one step, or 1.8° (options for 0.9° step angles are also available). By reversing the current in each winding, the position and speed of the motor is easily and precisely controlled, making these motors extremely useful for many different motion control applications.

Holding Torque


"Holding torque" and the corresponding rated current are leading specifications for selection in the ratings tables for all motors. Holding torque is often used as a figure of merit when comparing motors. It specifies the maximum external torque that can be applied to a stopped motor with rated current applied without causing the motor to rotate continuously. When the motor begins to rotate the torque available is often referred to as "pullout torque." Pullout torque ratings correspond to values shown in performance speed/torque curves. At starting speeds the pullout torque is typically 20-30% lower than the motor's rated holding torque.

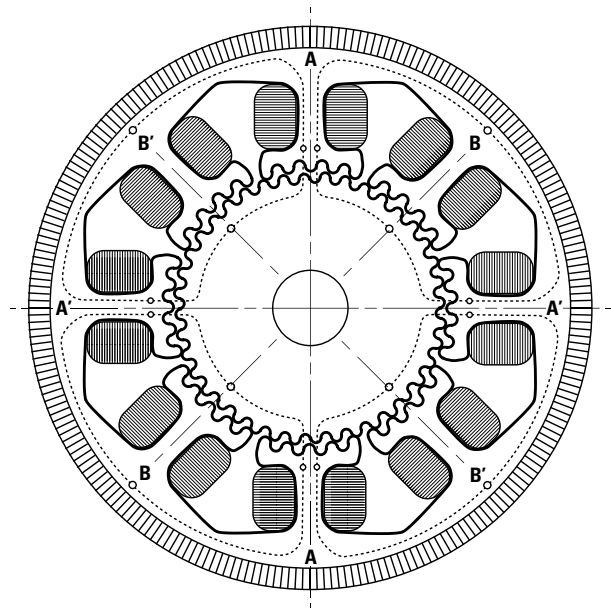

Stepper motor rotor & stator cross section

Drive Selection and Motor Performance

Stepper drives amplify and send DC current and voltage into the motor windings. Kollmorgen stepper motors are used with a variety of drives available from Kollmorgen and other manufacturers. These drives typically have a broad range of voltage and current ratings. A motor's performance is highly dependent on the current and voltage supplied by a drive. For even finer resolution and smoother operation, micro-stepping drives divide each step into many increments by controlling the magnitude of the current in each winding.

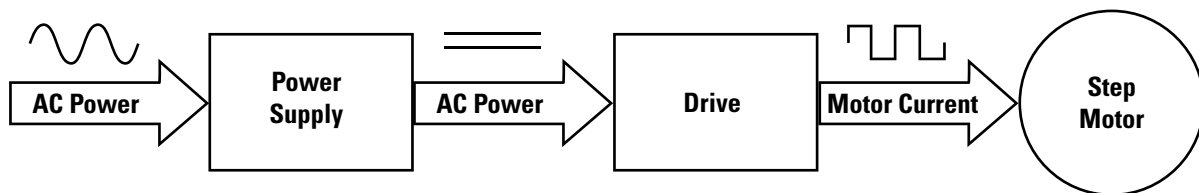

As applied voltage and/or current to the motor is changed, motor performance is altered. A performance speed/torque curve shows the pullout torque, which is directly dependent on the available current from the stepper drive. The torque values are shown along the motor's entire speed range, which is dependent on the available voltage.

Effects of Available Current

Figure 1 shows the performance of the same motor driven by bipolar stepper drive with different current ratings. In this comparison all drives have the same supply voltage. Note that high speed performance is not appreciably affected by the different current ratings. Low speed running torque, however, varies considerably with changes in the current rating. It is important to understand that when current over the rated current of the motor is applied, the increase in torque will not be proportional to the increased current. Furthermore, applied current levels above rated current will likely result in damage to the motor from demagnetization and/or overheating.

Effects of Available Voltage

Figure 2 shows the performance of the same motor driven by bipolar stepper drive with different supply voltage ratings. In this comparison, all drives have the same current rating. Note that low speed running torque is high and not appreciably affected by supply voltage differences. High speed performance, however, varies considerably with changes in supply voltage. Caution must be exercised when increasing supply voltage. Higher voltages will result in increased motor heating regardless of motor speed.

Effects of Motor Inductance

For a given supply voltage, a low inductance motor will give better performance at high speeds than a high inductance motor, but will operate at a higher temperature. This is true because current will increase faster in a low inductance winding, each time the winding power is switched. High inductance motors yield higher maximum torque and operate cooler, but their top speed is limited and torque falls off more rapidly as speed rises, versus a lower inductance motor.

Full-Step, Half-Step, and Microstepping

The terms full-step, half-step and “microstep” are commonly used in the discussion of step motors. A 1.8° step motor, for example, has 200 discrete positions in a full 360° revolution. Since 360° divided by 200 equals 1.8° , the motor shaft will advance 1.8° each time the motor is given a digital command to take one step. This is known as a full-step. The term “half-step” indicates a 0.9° step angle (half of a full 1.8° step). This is achieved with a switching technique that alternately applies positive current, no current, and negative current to each winding in succession. The term “microstep” refers to a more sophisticated form of control which goes beyond the simple switching of power between phase A and phase B of the motor windings, and takes control of the amount of current being sent to the individual windings. Microstepping permits the shaft to be positioned at places other than the 1.8° or 0.9° locations provided by the full-step and half-step methods. Microstepping positions occur between these two angular points in the rotation of the rotor. The most commonly used microstep increments are $1/5$, $1/10$, $1/16$, $1/32$, $1/125$ and $1/250$ of a full step. A major benefit of microstepping is that it reduces the amplitude of the resonance that occurs when the motor is operated at its natural frequency or at sub-harmonics of that frequency. The improved step response and reduced amplitude of the natural resonances result from the finer step angle.

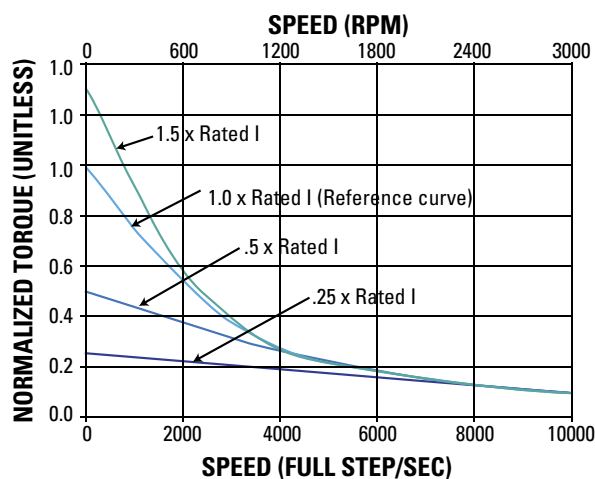


Figure 1

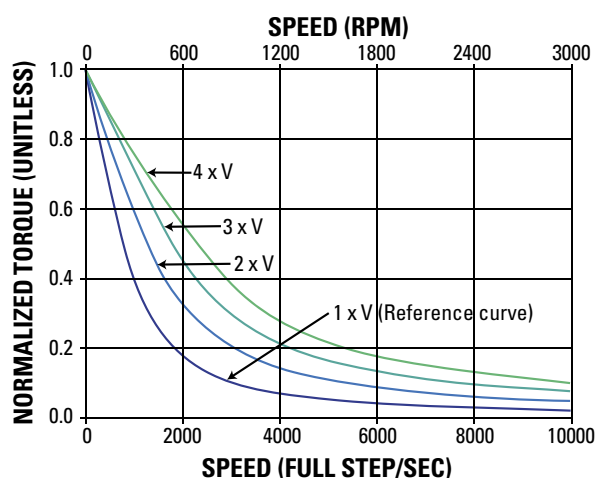


Figure 2

Stepper Motor Application Worksheet


Company _____ Date _____

MOTOR

circle or specify

Note: All motors are 1.8°, 2 Phase.

- B - Pilot Diameter
A - Flange Width
E - Max Motor Length
F - Pilot Depth

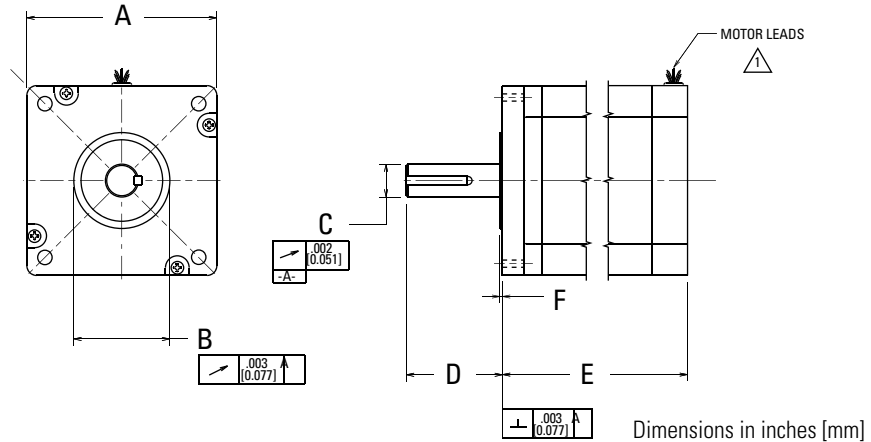

Dimensions in inches [mm]

• STANDARD AND SPECIAL FEATURES

Motor model number from catalog: _____

Circle whether you want standard or special features. If special, indicate details. Note that special features may result in increased price or leadtime.

• FRONT SHAFT (standard) (special)

D shaft length _____ ± _____ (±.015)*

C shaft dia. _____ ± _____ (+.0000/- .0005)*

run out Δ _____ (.002 std. ext.)*

— **Straight Key** per electric motor standards (standard option) (special)

Key: width _____ height _____

length _____ other _____

— **Flat** See Fig. 1 (standard option) (special)

Min. usable length X _____

Dim. over flat Y _____ ± _____ (±.005)*

Corner radius R allowed _____ (±.060)*

Other _____

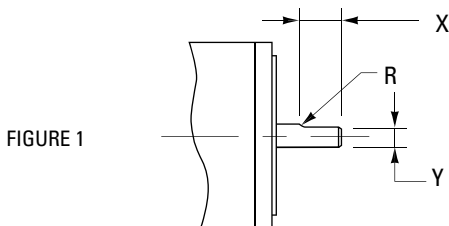


FIGURE 1

• REAR END BELL (standard) (special)

mtg. hole B.C. _____ ± _____ (±.010)*

mtg. holes _____

hole pattern _____

other _____

• REAR SHAFT (standard) (special)

shaft length _____ ± _____ (±.040)*

shaft dia. _____ ± _____ (+.0000/- .0005)*

run out Δ _____ (.002)*

other _____

— **Woodruff Key** See Fig. 2 (standard option) (special)

ANSI std. key no. _____ (Example 303)

Key location Z _____ ± _____ (±.020)*

Other _____

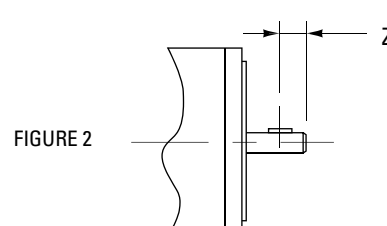



FIGURE 2

Notes:

Δ NEMA standard for shaft run out is .002" + .001" for each additional inch of extension past the standard length.

* Example of typical tolerance

Notes

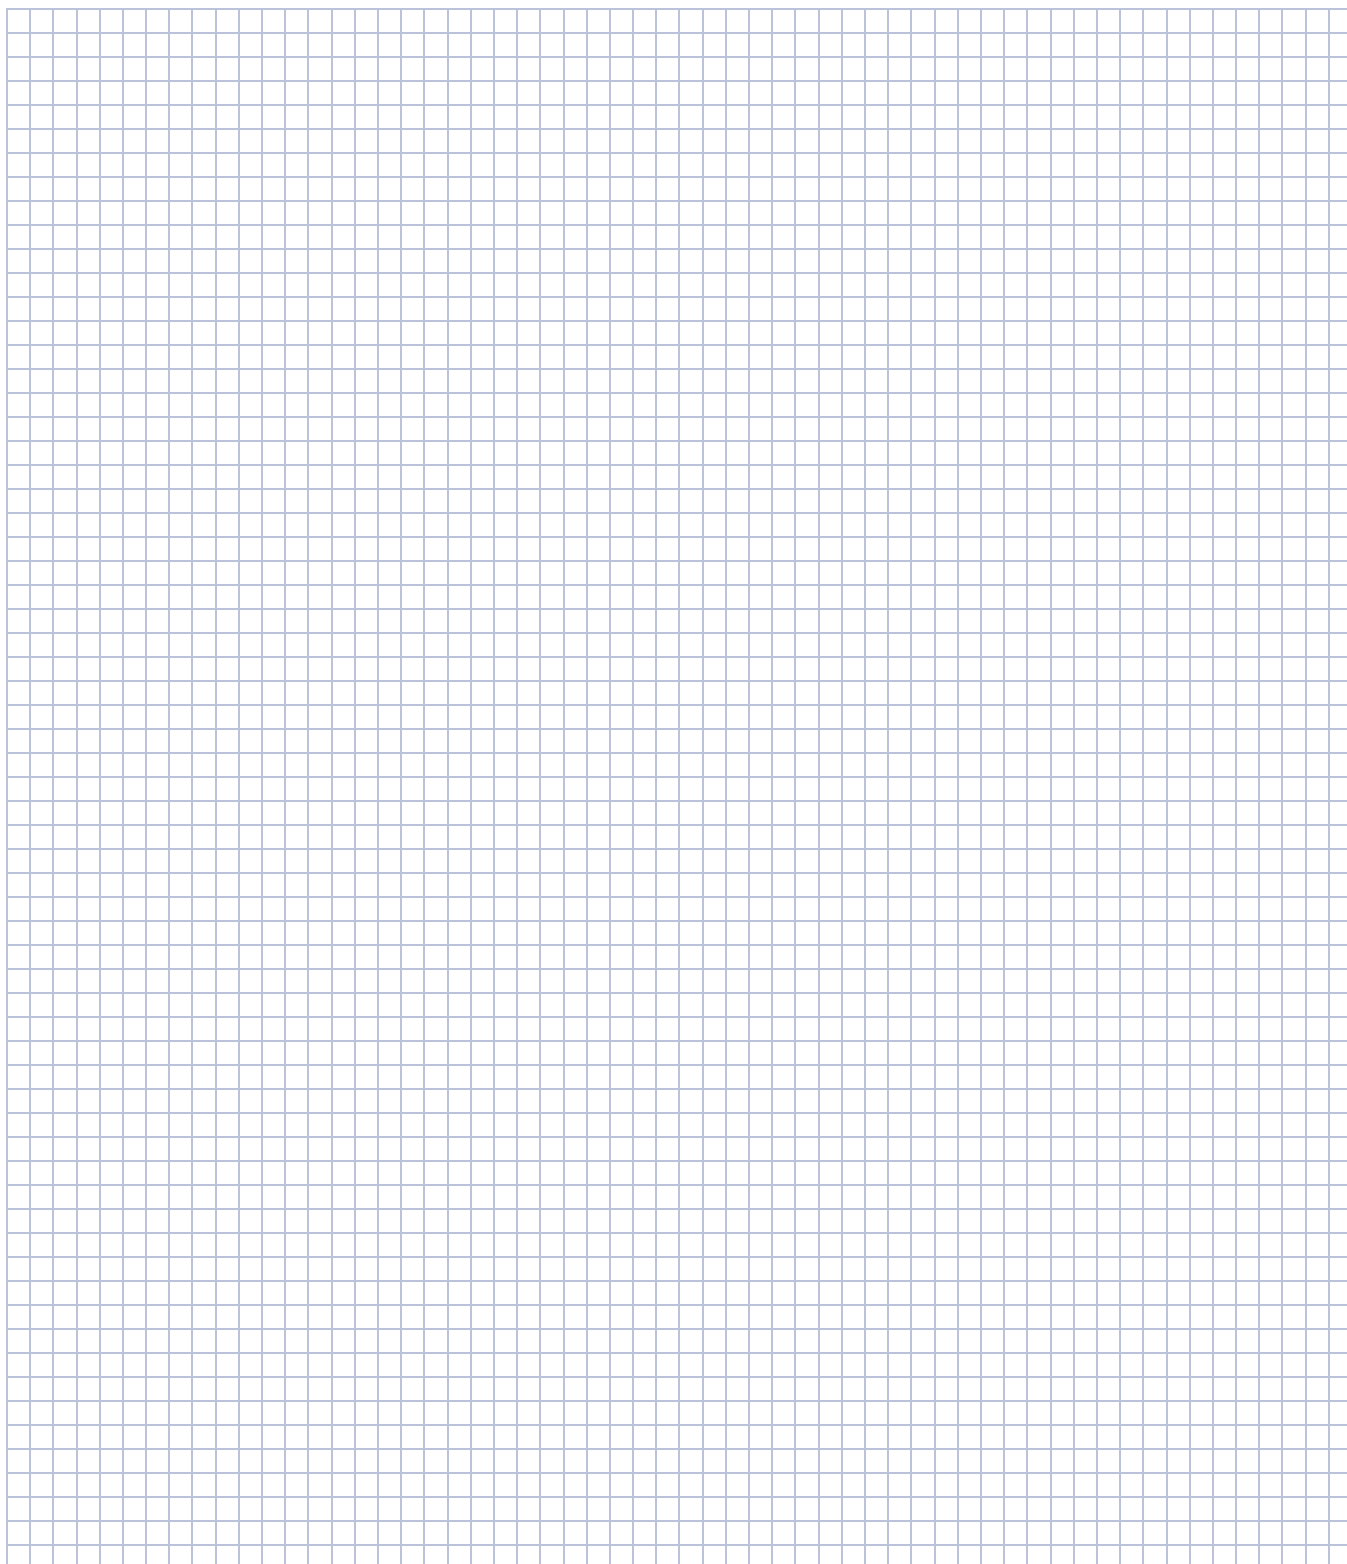

▶ Stepper Positioning Drives

Kollmorgen's stepper drives are designed with versatility, ease-of-use, and cost-effectiveness in mind. Choose from a broad range of advanced drives and controls including full, half, and microstepping models in both modular and packaged designs.

Modular drives are open-frame units or have small enclosures, and require an external DC power source. They are generally used where the drive will become an integral part of the user's system or in multiaxis systems utilizing a common power supply.

A packaged drive is a stand-alone unit that operates directly from an AC power source and is packaged in a full enclosure.

P-Series Drive Features and Benefits

P5000



Value DC Input Stepper Drive

- Wave matching for Kollmorgen motors to provide optimal performance
- All inputs and outputs are optically isolated
- Step and direction inputs or internal velocity controlled oscillator (VCO) dip switch selectable
- DIP switch selectable micro-stepping resolution settings
- Idle current reduction, DIP switch selectable
- Compensation for mid-range instability
- RoHS & CE certified
- UL pending

P6000



Full Featured AC Input Stepper Drive

- No programming required
- Covers full power range of Kollmorgen steppers
- Switch selectable current from 0.2-5.7 Arms, 8.0 A peak
- Switch selectable for many Kollmorgen motor parings
- All inputs and outputs are optically isolated
- Single-ended and differential step and direction
- Enable input
- Switch selectable micro-stepping resolution
- Anti-resonance based on load inertia
- RoHS & CE certified

P7000



Full Featured AC or DC Input Stepper Drives with Intelligent Indexing Option (-PN)

- AC and DC input versions
- Covers full power range of Kollmorgen steppers
- Drives can be configured by either dip switches or P7000 software
- Intelligent indexing option (-PN) provides ability to link motion tasks.
- All inputs and outputs are optically isolated
- Single-ended and differential step and direction
- Enable input
- Switch selectable micro-stepping resolution
- Anti-resonance based on load inertia
- RoHS, CE and UL certified

Budget/Value

Full-Featured

STEPPER DRIVE PRODUCT OVERVIEW

Stepper Drive Model	Modes of Operation*	Input voltage (Vdc)	Input Voltage (Vac)	Output current (Adc) Continuous (Peak)
P5000	S, V	20 - 75	n/a	0.7 - 2.0 (3.5)
P6000	S	n/a	110-240 +/-10%	0.3 - 5.7 (8.0)
P70530	S, M	20 - 75	n/a	0 - 5.0 (7.1)
P70360	S, M	n/a	120/240	0 - 2.5 (3.5)

Modes of Operation: S - Step and Direction; V - Velocity Controlled Oscillator (VCO); M - Motion Node Indexing


► P5000 Stepper Drive-Controller

Big Performance, Micro Package.

The P5000 is a compact micro-stepping stepper drive optimized for high system performance with Kollmorgen's industry leading POWERMAX II stepper motors. It is an impressive yet simple addition to the Kollmorgen stepper drive family.

Optimized. Smooth. Compact.

Pairing a stepper system doesn't get any easier! The P5000 and Kollmorgen stepper motors are meant to be together. With Kollmorgen motor windings optimized for the P5000, all you have to do is set the dip switches for the motor you are paired with and you have a smooth operating system that fully utilizes the potential of your Kollmorgen motor and drive combination!

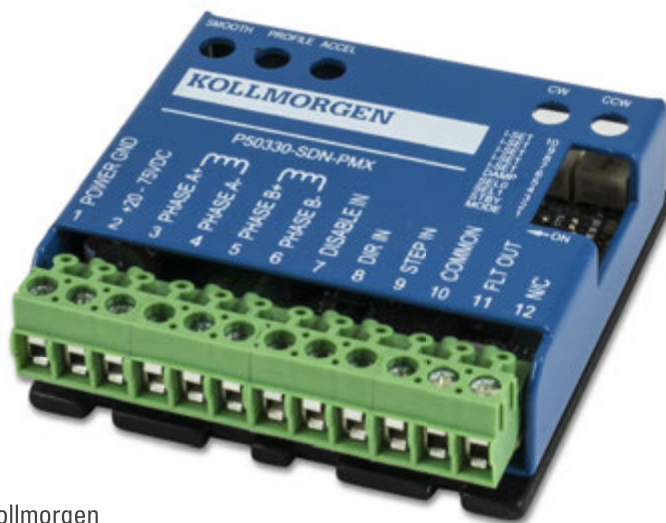

P5000 Stepper Drive
(Shown Actual Size)

Features

- Current output from 0.7-3.5 Arms peak; DIP switch selectable in 0.2 Amp increments
- Bus Voltage 20-75 Vdc
- Wave matching for Kollmorgen motors to provide optimal performance for the Kollmorgen Stepper Motor Families.
- All Inputs and Outputs are Optically Isolated
- Command Source from External Step and Direction Inputs or Internal Velocity Controlled Oscillator (VCO); DIP switch selectable
- External Single-Ended Step and Direction Command
 - Disable or Fault Reset Input
 - Fault or Enable Output
- Pulse Multiplier smooths micro-stepping*
- Idle Current Reduction; DIP switch selectable
- Compensation for mid-range instability*
- VCO Mode
 - CW Limit Input
 - CCW Limit Input
 - Run/Stop Input
 - Run/Stop Output
 - CW Speed trimpot
 - CCW Speed trimpot
 - Accel/Decel trimpot
- DIP switch selectable micro-stepping-resolution settings
- RoHS & CE certified
- UL pending

*Patents Pending



P6000 Stepper Drive-Controller

Powerful, Yet Simple.


The P6000 is an AC input micro-stepping drive optimized for pairing with POWERPAC and POWERMAX stepper motors. With the simplicity of dip switches and the optimized performance from the complete system, this stepper solution brings increased machine performance without the associated complexity.

Powerful. Simple. Optimized.

The P6000 and Kollmorgen POWERPAC and POWERMAX stepper motors are designed to provide the best system solution when paired with one another. The easy dip switch selection matches the P6000 settings with the optimal Kollmorgen stepper motor requirements to provide the best performance and most efficient solution for nearly any application.

Features

- No programming required!
- Covers full power range of Kollmorgen Stepper Motors
- Switch Selectable Current Output from 0.2-5.7 Arms, 8.0 A peak
- 120/240 VAC Input (160/320 Vdc Bus)
- Kollmorgen Stepper Motor Pairing; Switch Selectable
- All Inputs and Outputs are Optically Isolated
- Single-Ended and Differential Step and Direction or CW/CCW Command; Switch Selectable
- Enable Input
- Fault Output (Sinking or Sourcing)
- Status LEDs for easy troubleshooting
- Switch Selectable Micro-Stepping-Resolution Settings
- Step Smoothing Filter; Switch Selectable
- Idle Current Reduction; Switch Selectable
- Anti-Resonance Based On Load Inertia; Switch Selectable
- Self-Test Conducts Spin Test to Confirm Proper Connection; Switch Selectable
- RoHS & CE Certified

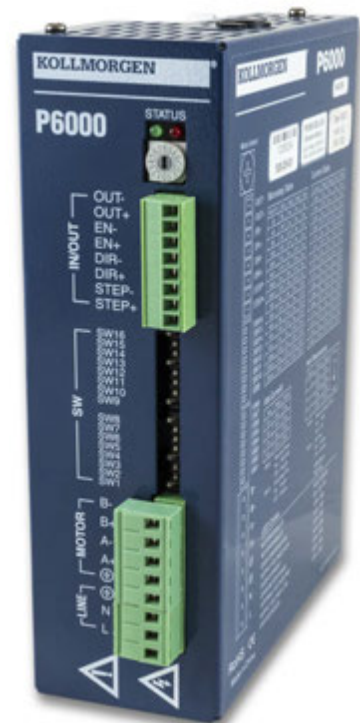

P6000 Stepper Drive



P7000 Stepper Drive-Controller

P7000 stepper drives offer a unique level of system functionality, smoothness, high-speed performance and innovation unmatched in the industry.

The compact P7000 is designed to power Kollmorgen step motors ranging from NEMA size 17 up to NEMA size 42. Two power configurations are available for operation directly from AC power, or from a DC power supply.

There are two levels of control offered. The basic drive accepts step and direction inputs. P7000 drives are also available with an integrated position controller (-PN option). The drives are configured by either on-board dip switches, or with the P7000 tools software.

Advanced P7000 Features Make it the Best Choice to Meet Your Application Requirements

Multisteping™

Also known as auto-smoothing. The P7000 drive accepts full step pulse commands from the indexer and inserts fine micro-steps to smooth coarse low speed motion. This allows you to significantly upgrade machine performance without having to redesign machine control architecture.

Auto-Tuning

Advanced current auto-tuning techniques provide outstanding low-speed smoothness. The P7000 senses the motor's characteristics and automatically fine tunes itself to meet your high-performance needs. This reduces installation and set-up time.

Mid-Band Anti-Resonance Control

Reduces negative effects of mechanical resonance, allowing you to get more out of a smaller motor and virtually eliminating nuisance stalls and machine downtime.

Idle Current Reduction

If you do not require the motor's full torque to hold a load at rest, you can select the right amount of current (torque) to reduce motor heating and power consumption. This increases the life of the system.

Dynamic Smoothing

Quasi-S-curve algorithm reduces jerk, especially upon acceleration. Increases mechanical life of the machine and reduces energy consumption.

Intelligent Indexing Option (-PN)

Wizard-like P7000 helps you to develop and link motion tasks such as homing and conditional and unconditional indexing. You can be up-and-running quickly.

Modbus RTU Compatible

The intelligent indexing option (-PN) supports Modbus RTU to control motion with an external interface device. External interfaces make controlling motion simple for machine operators.

P7000 Tools


The position node option allows you to configure up to 63 absolute or relative moves. You can specify the moves' distance, acceleration, velocity, and deceleration rates, or simply specify the distance and total time for the move – P7000 will perform the calculations automatically.



Specifications	Units	P70530	P70360
Input voltage range	Volts	20 - 75 Vdc	120 or 240 Vac
Continuous current	Amps rms	5	2.5
Microstep peak current	Amps peak	7.1	3.5



P-Series Stepper Drive Nomenclature

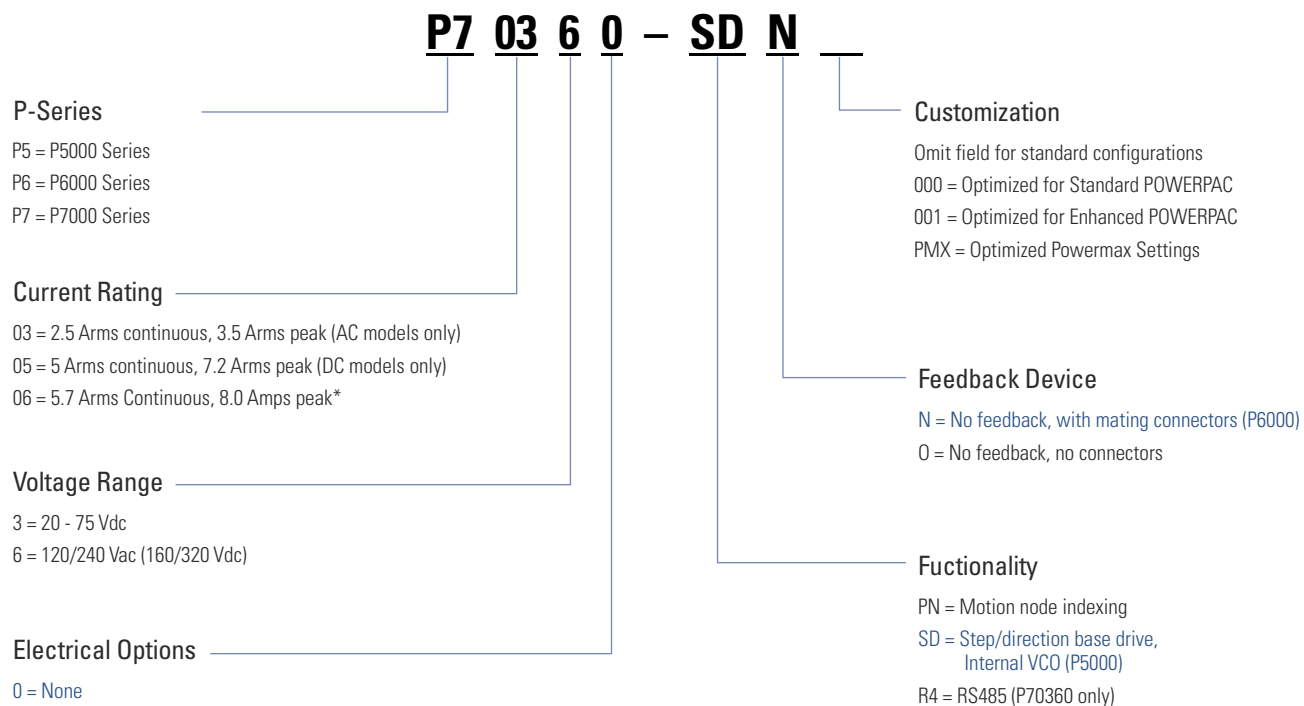

About Kollmorgen

Since its founding in 1916, Kollmorgen's innovative solutions have brought big ideas to life, kept the world safer, and improved peoples' lives. Today, its world-class knowledge of motion systems and components, industry-leading quality, and deep expertise in linking and integrating standard and custom products continually delivers breakthrough motion solutions that are unmatched in performance, reliability, and ease-of-use. This gives machine builders around the world an irrefutable marketplace advantage and provides their customers with ultimate peace-of-mind.

**For assistance with your application needs
in North America, contact us at: 540-633-3545,
support@kollmorgen.com or visit
www.kollmorgen.com for a global contact list.**



KOLLMORGEN

Because Motion Matters™

Kollmorgen
203A West Rock Road
Radford, VA 24141 USA
Phone: 1-540-633-3545
Fax: 1-540-639-4162

Kollmorgen Europe GmbH
Pempelfurtstraße 1
40880 Ratingen
Germany
Phone: +49 (0) 2102 9394 0
Fax: +49 (0) 2102 9394 3155

Kollmorgen Asia
Floor 4, Building 9, No. 518,
North Fuquan Road, Changning District,
Shanghai 200335, China
Phone: + 86 400 661 2802

Kollmorgen Aerospace and Defense
501 West Main Street
Radford, VA 24141 USA
Phone: 1-540-731-5668
Fax: 1-540-731-5679